



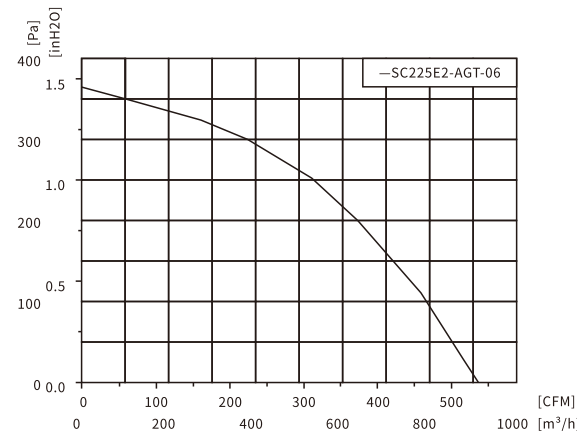

Material: Impeller made of plastic PA66
Type of protection: IP42
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited, Under-voltage and over-voltage lockout protection, Soft start
Insulation Class: F
Direction of rotation: Anticlockwise see on the leads
Approvals: CE, CCC
Amb. Temp: -25°C ~ +65°C

材料: 叶轮由PA66塑料制成
电机防护等级: IP42
电气性能: 控制型号输入0-10VDC/PWM, 速度反馈信号
轴承: 滚珠轴承
保护: 堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -25°C ~ +60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC225E2-AGT-06	DM055E2-AGT-20	1~230	50/60	850	500	2300	50	0.44	70

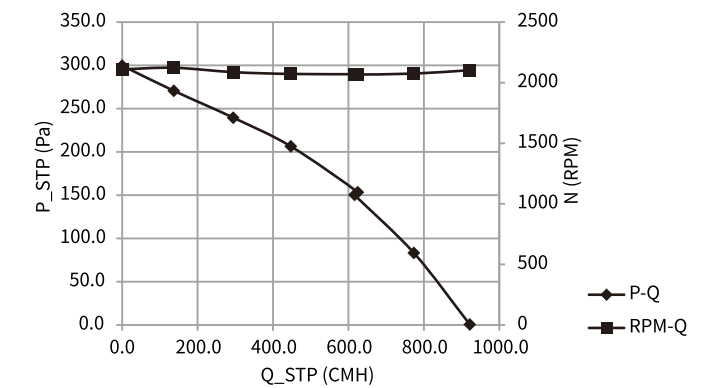

Material: Impeller made of ABS+10%GF
Type of protection: IP20
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C ~ 65 °C

材料: 叶轮采用ABS+10%GF制成
电机防护等级: IP20
轴承: 滚珠轴承
保护: 具有可恢复热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC225F2-055-001	DE055F2-0000L-001	24	/	/	920	541	2200	58	2.4	62

