

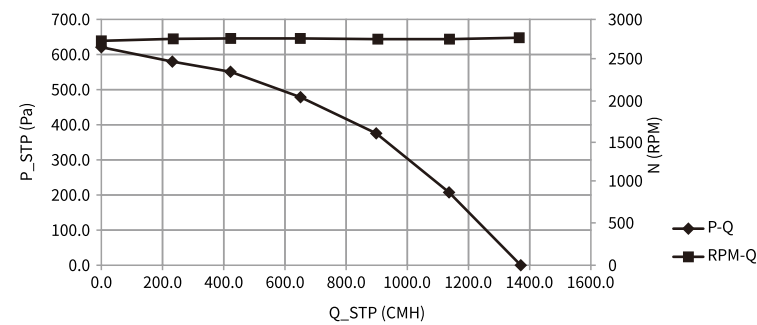
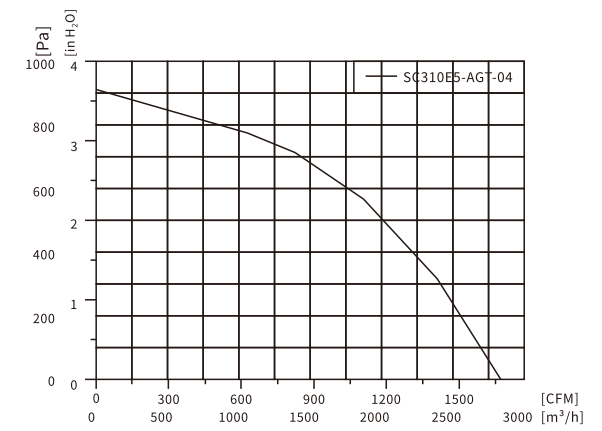


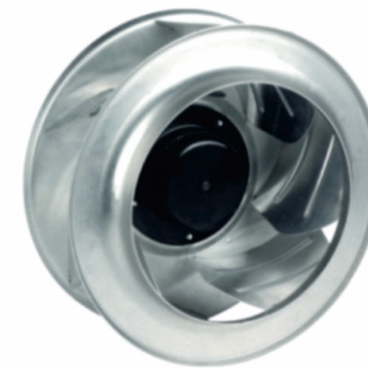

Material: Impeller made of PA66+25%GF
Type of protection:IP42
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals:CE、CCC
Amb.Temp:-40°C~+65°C

材料:叶轮由PA66+25%GF制成
电机防护等级:IP42
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC250E2-055-000	DE055F2-00002A-001	230	50/60	/	1350	794	2720	135	1.01	71

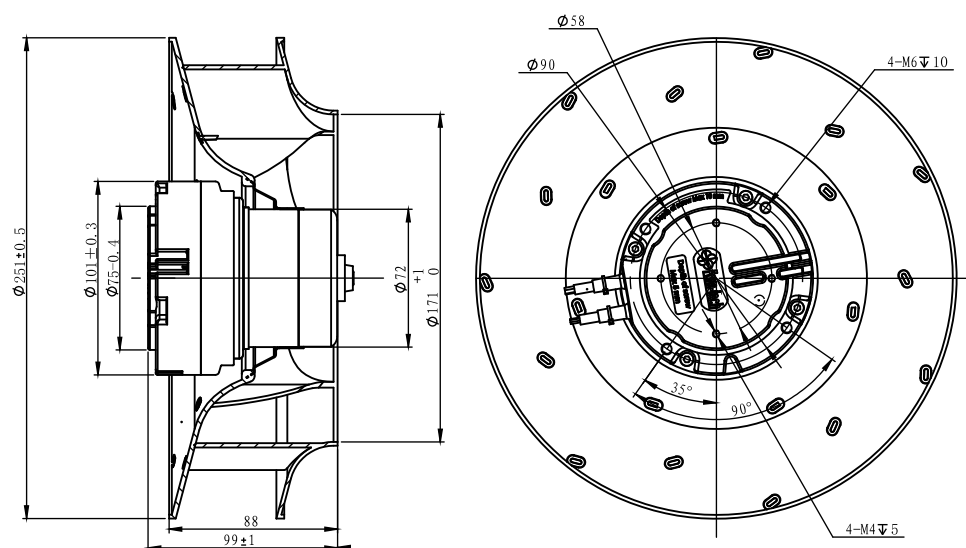

Material : Impeller made of aluminum alloy
Type of protection : IP44
Technical features : Control input 0-10VDC / PWM Tach output
Bearing : Ball bearing
Protection: Locked-rotor protection , Current limited, Un-der-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CCC
Amb Temp : -25°C~60 °C

材料:叶轮采用A铝合金制成
电机防护等级:IP44
电气性能:控制型号输入0-10VDC/PWM,速度反馈信号
轴承:滚珠轴承
保护:堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC310E5-AGT-04	DM088E5-AGT-16	1~230	50/60	2650	1560	2600	360	2.3	78

