



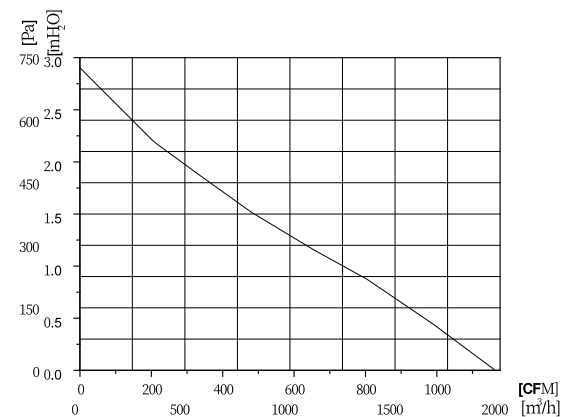

Material: Impeller made of SPCD
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC、CE
Amb Temp: -40°C~+65°C

材料: 叶轮由SPCD材料制成, 表面电泳。
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -40°C~+65°C

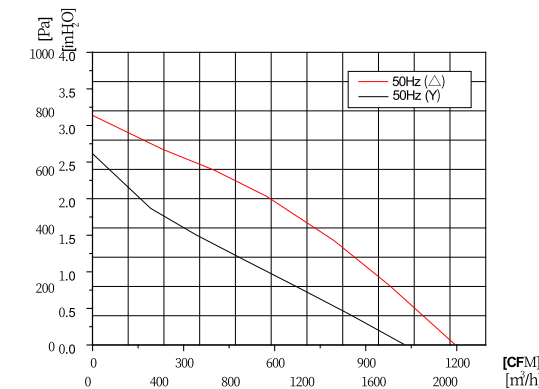

Material: Impeller made of SPCC
Type of protection: IP54
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise, see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用冷轧板制成
电机防护等级: IP54
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC280A1-AG5-03	FW068-0452E15	230	50	2000	1178	2550	247	1.08	83	8/450

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC280B1-074-001-001	AE074B1-00000	3~400	50 (Δ)	2100	1236	2730	278	0.56	78	/
			50 (Y)	1750	1030	2270	208	0.33	73	

