

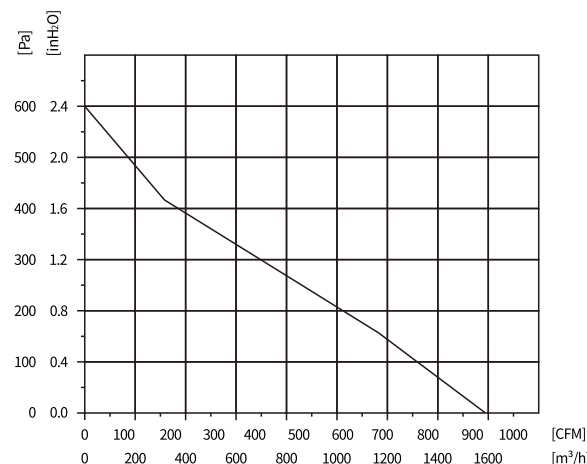


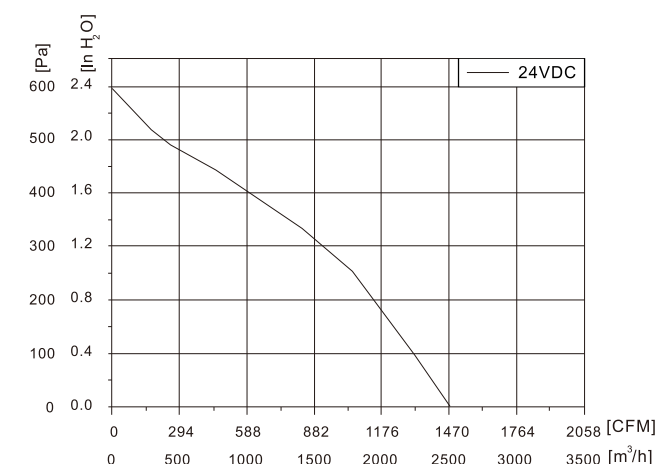

Material: Impeller made of aluminum
Type of protection: IP44
Bearing: Ball bearing
Protection: Soft start, Current limited, Under-voltage and over-voltage lockout protection, Locked-rotor protect
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb. Temp: -40°C ~ +65°C

材料: 叶轮由金属铝制成
电机防护等级: IP44
轴承: 滚珠轴承
保护: 软保护、限流保护、欠压与过压停止运转保护、堵转保护
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC280D3-DF0-02	DM075D3-DF0-24	48	/	/	1600	941	2200	110	2.3	79

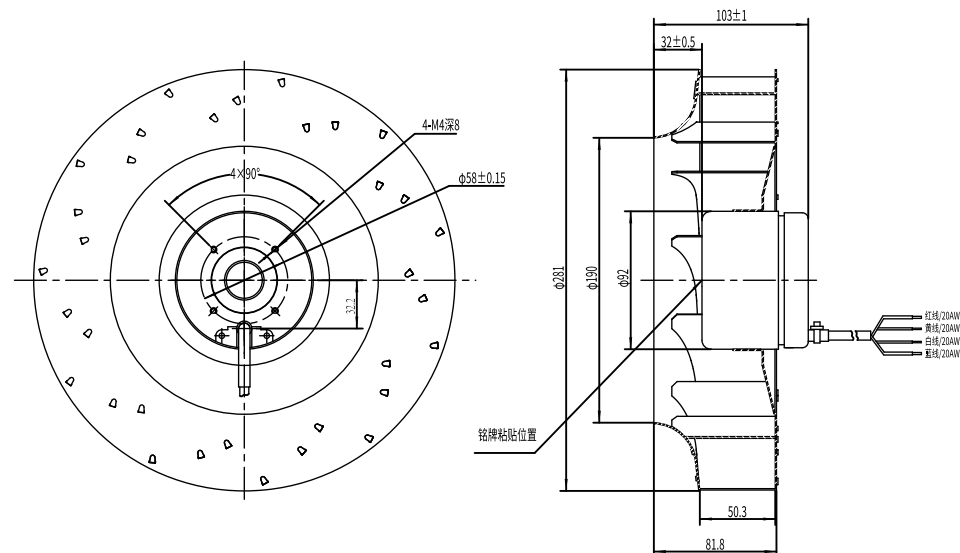

Material: Impeller made of sheet aluminum
Type of protection: IP42
Technical features: Control input 0~10VDC/PWM
Bearing: Ball bearing
Protection: Tach output, Locked-rotor protect, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise see on the leads
Approvals: UL
Amb Temp: -25°C ~ +60°C

材料: 风轮采用铝合金制成
电机防护等级: IP42
电气特征: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: UL
工作温度范围: -25°C ~ +60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC310E5-DC0-01	DM088E5-DC0-00	24	/	2500	1471	1940	225	9.4	60

