

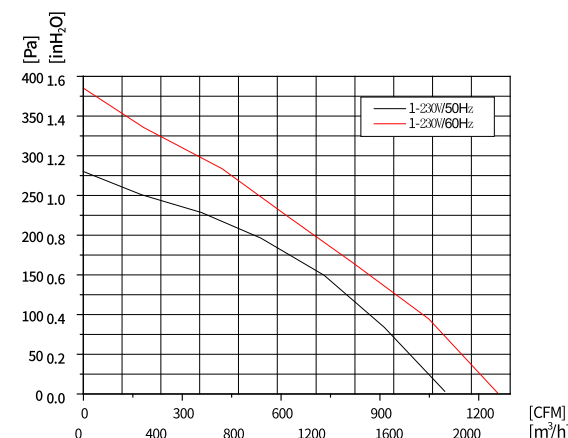
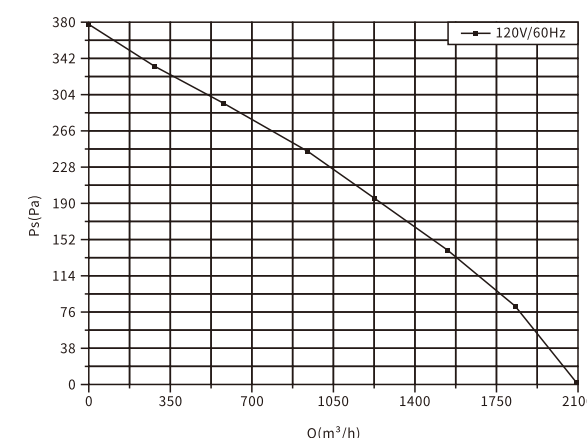


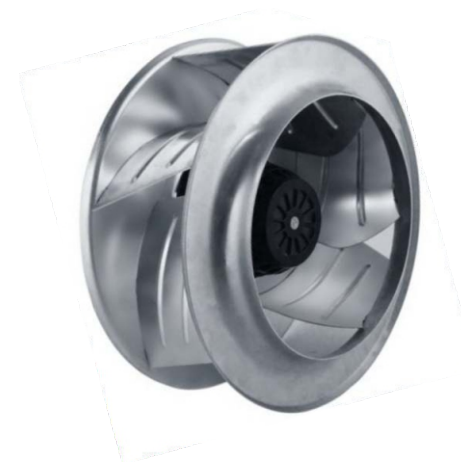

Material: Impeller made of aluminum
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC, UL
Amb Temp: -40°C~+65°C

材料:叶轮采用铝合金制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC、UL
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC320A2-AGT-08	FW074-0354E10	1~230	50	1800	1059	1390	123	0.55	72	4/450
			60	2000	1177	1580	162	0.75	72	

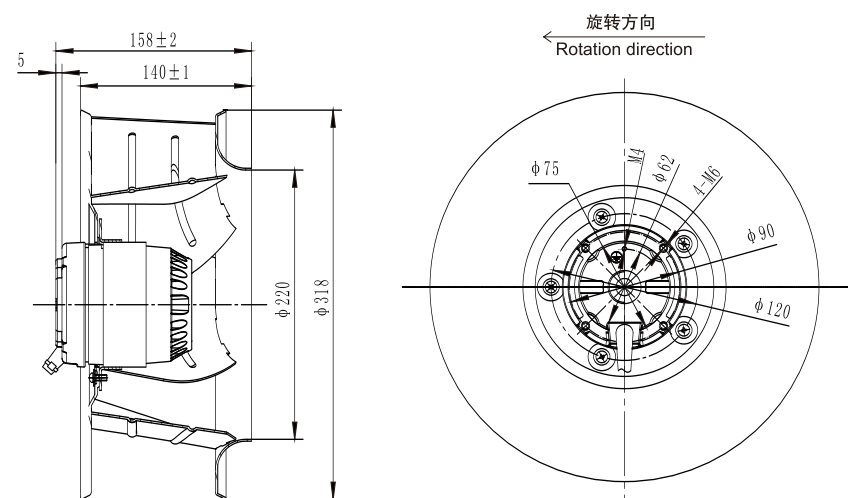

Material: Impeller made of SPCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protect(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:叶轮由SPCC制成
电机防护等级:IP23
轴承:滚珠轴承保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC320A2-AD6-00	FW074-0354E31	120	60	16/450	1800	1059	1650	175	1.45	≤77

