



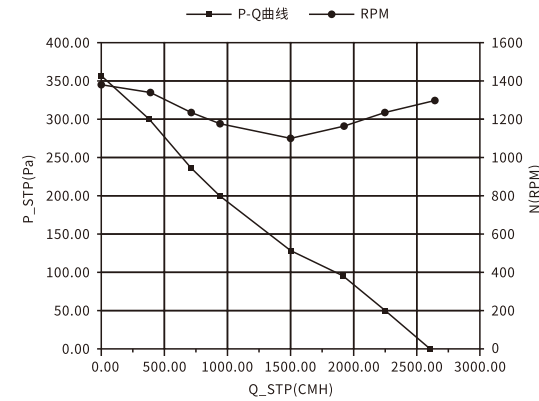

Material: Impeller made of aluminum
Type of protection: IP32
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用铝合金制成
电机防护等级: IP32
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

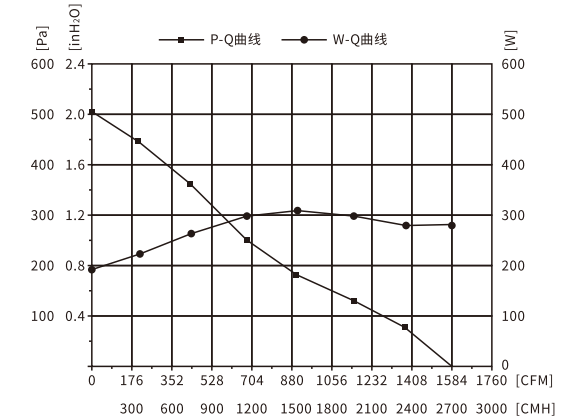

Material: Impeller made of aluminum
Type of protection: IP23
Bearing: Ball bearing
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65 °C

材料: 叶轮由金属铝制成
电机防护等级: IP23
轴承: 滚珠轴承
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC355A2-AG5-26	AM074A2-AG5-16	230	50	5/450	2640	1553	1330	150	0.66	≤69

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC355A2-AC6-00	FW074-1514E20	1~115	60	20/250	2700	1588	1500	280	2.4	73

