

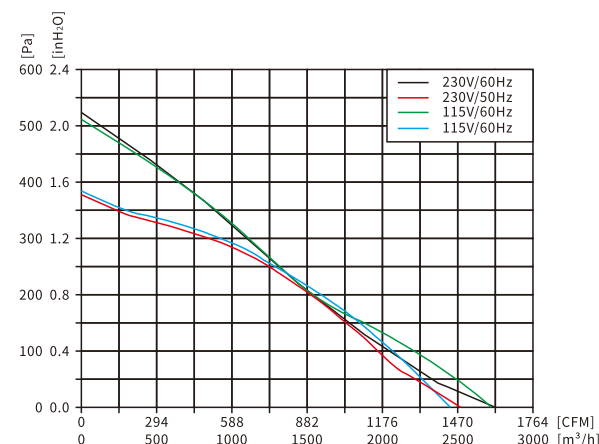
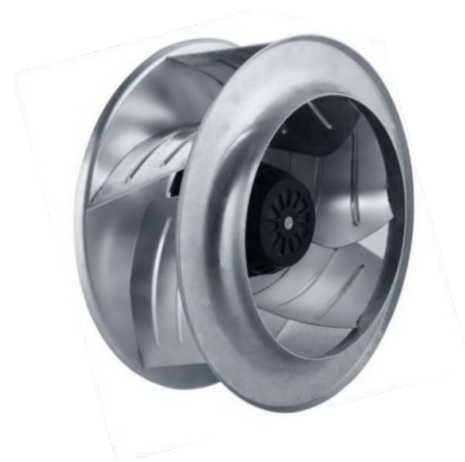
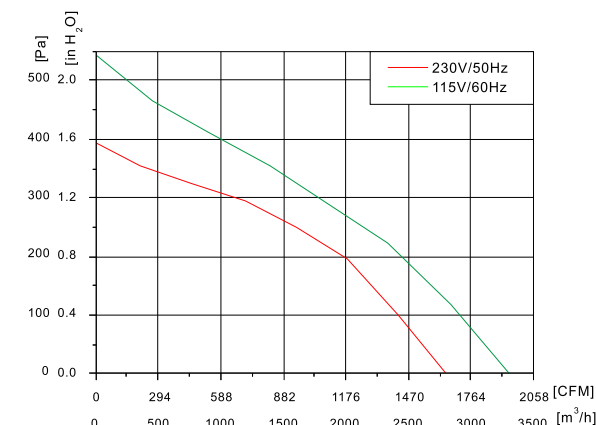
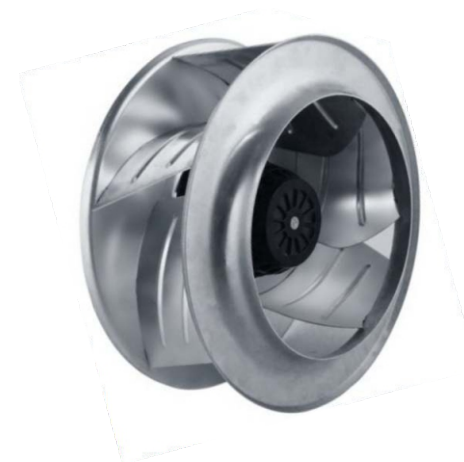


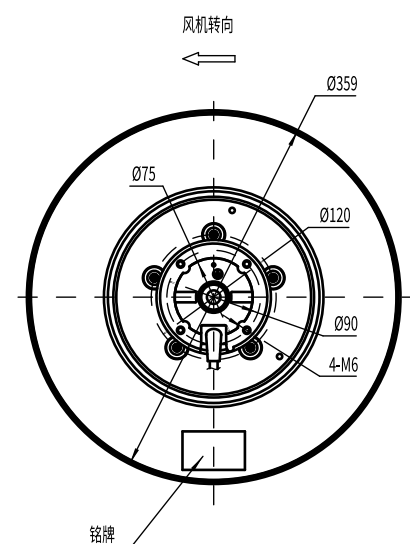

Material: Impeller made of aluminum
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:叶轮采用铝合金制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC355A2-AGT-22	AM074A2-AGT-03	1~230	50	2250	/	1400	180	0.83	66	6/450
			60	2600	/	1600	250	1.15	69	
SC355A2-ACT-22	AM074A2-ACT-01	1~115	50	2400	/	1390	195	1.95	74	20/250
			60	2600	/	1550	270	2.4	77	

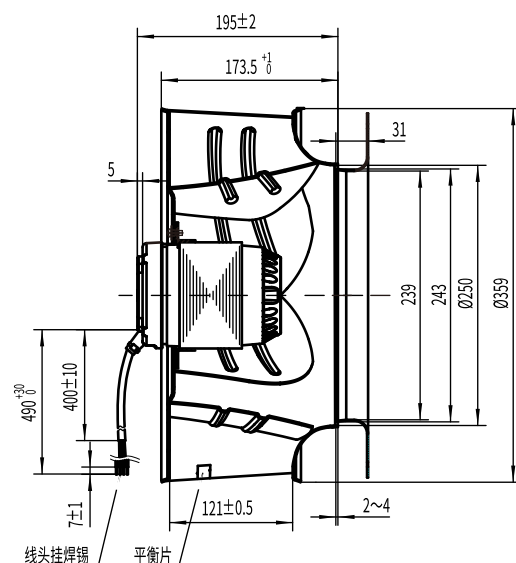

Material: Impeller made of aluminum
Type of protection: IP32
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protect(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用铝合金制成
电机防护等级:IP32
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SC355A2-AG5-16	FW074-0604E09	230	50	2750	1649	1400	210	1.0	68	8/450
SC355A2-AC6-02	AM074A2-AC6-07	115	60	3100	1934	1580	322	2.84	71	32/250

