

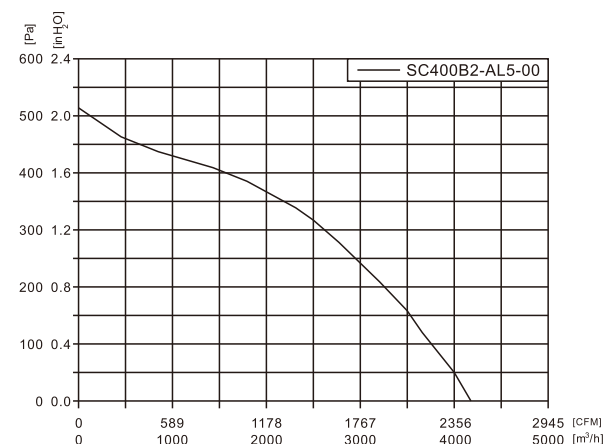


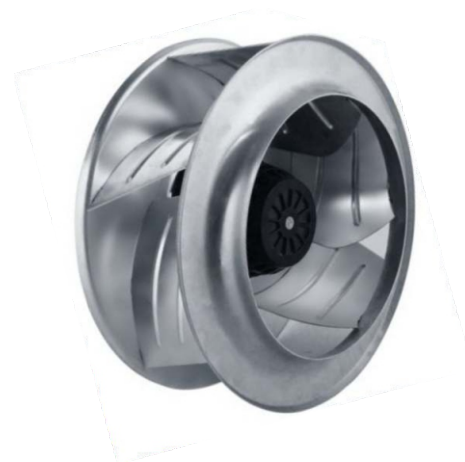

Material: Impeller made of sheet aluminum
Type of protection: IP44
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用铝合金制成
电机防护等级:IP44
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC400A2-AG5-00	AM106A2-AG5-00	230	50	3650	2150	1370	370	1.6	76	12/450

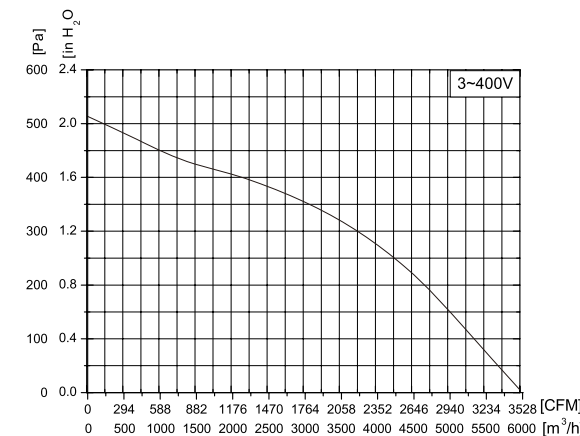

Material: Impeller made of sheet aluminum
Type of protection: IP54
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP54
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Pstp (Pa)
SC450B2-AL5-00	AM106B2-AL5-02	3-400(Y)	50	6200	3653	1390	520	1.1	73	0
			50	3550	2092	1310	770	1.6	/	355

