

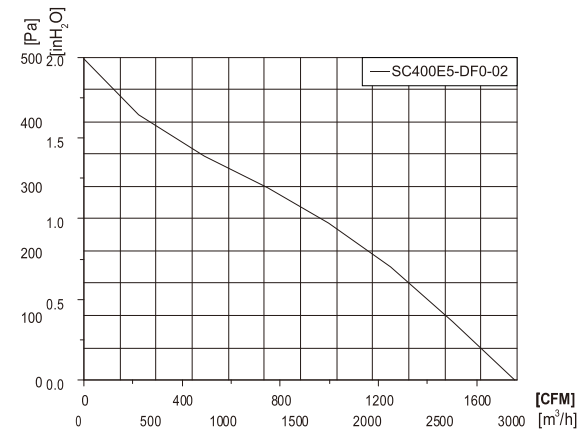


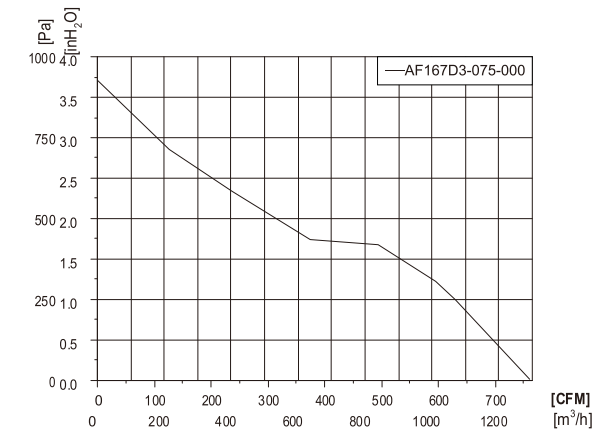

Material: The impeller made of sheet aluminum
Type of protection : IP42
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads.
Approvals: CCC
Amb Temp: -25°C~60°C

材料:风轮采用铝合金制成
电机防护等级:IP42
电气特性:采用0~10VDC控制电压或脉宽调制
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护和软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC400E5-DF0-02	DM088E5-DF0-02	48	-	3000	1825	1330	192	4.0	76

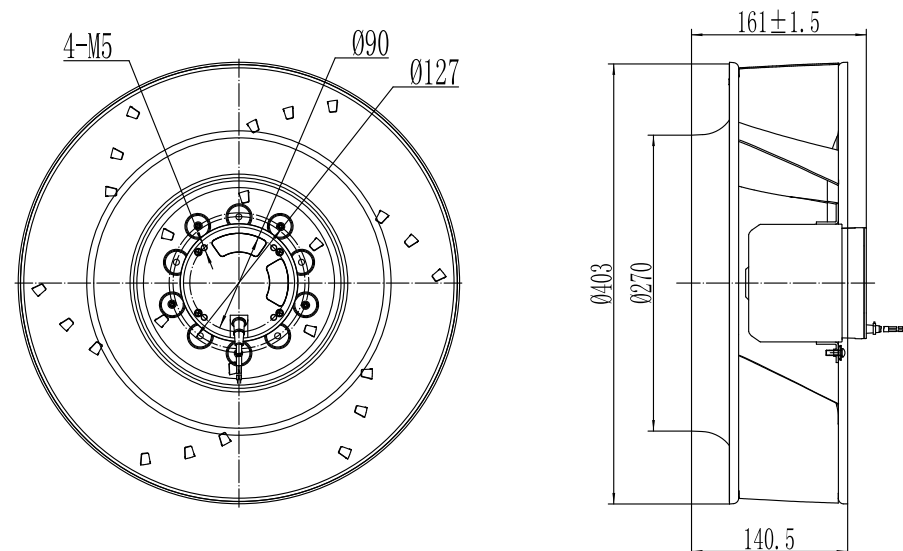

Material: The impeller made of plastic PA66
Type of protection : IP20
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: B
Direction of rotation: Clockwise, see on the leads.
Approvals: CCC, CE
Amb Temp: -25°C~60°C

材料:风轮采用塑料PA66制成
电机防护等级:IP20
电气特性:采用0~10VDC控制电压或脉宽调制
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护和软启动
绝缘等级:B级
转向:从引出线看为顺时针
产品符合的认证:CCC、CE
工作温度范围:-25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF167D3-075-000	DE075D3-00001	48	/	1180	694	6100	197	4.1	73

