

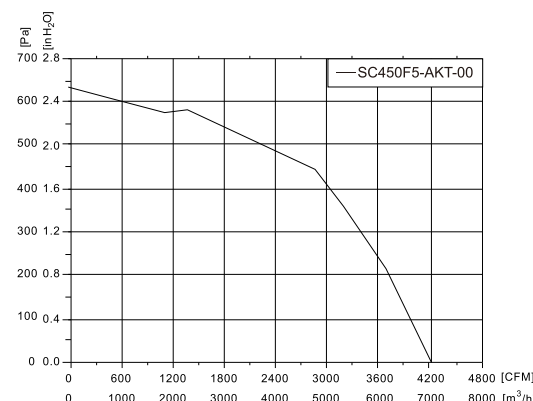


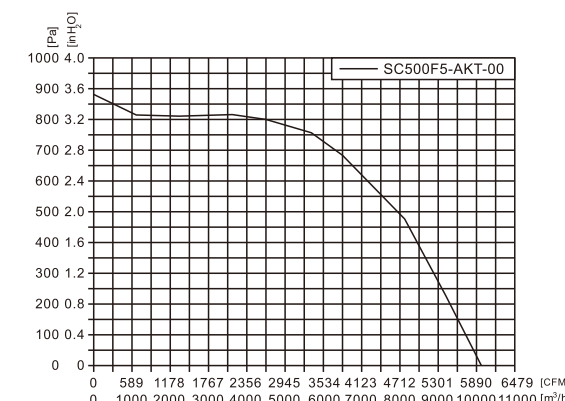

Material: Impeller made of aluminum alloy
Type of protection: IP54
Technical features: Control input 0-10VDC / PWM Tach output
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited, Un-der-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -25°C~+60°C

材料:叶轮采用铝合金制成
电机防护等级:IP54
电气性能:控制型号输入0-10VDC/PWM,速度反馈信号
轴承:滚珠轴承
保护:堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC450F5-AKT-00	DM112F5-AKT-05	3~380	50/60	6900	4061	1575	640	1.3	77

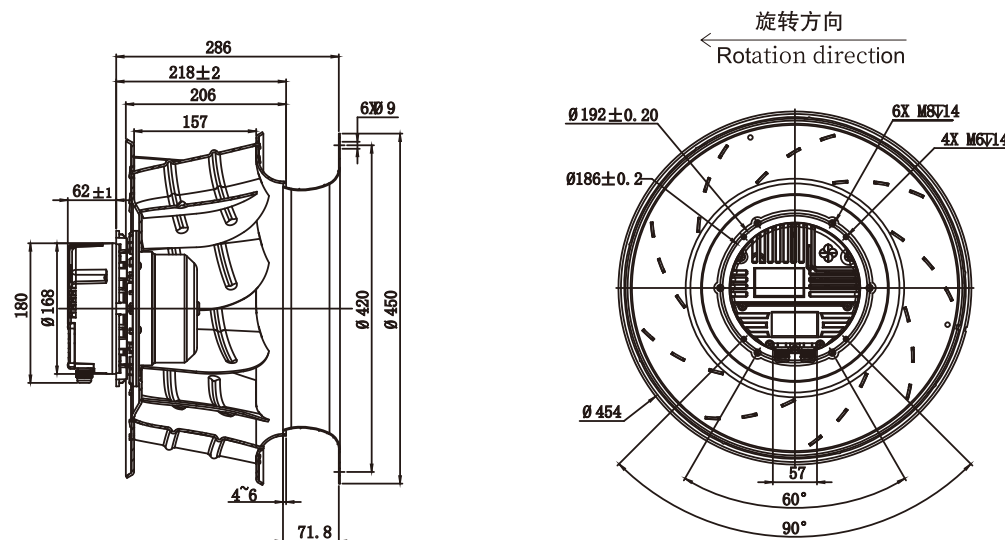

Material: Impeller made of aluminum alloy
Type of protection: IP54
Technical features: Control input 0-10VDC / PWM Tach output
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited, Un-der-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -25°C~+60°C

材料:叶轮采用铝合金制成电机
防护等级:IP54
电气性能:控制型号输入0-10VDC/PWM,速度反馈信号
轴承:滚珠轴承
保护:堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC500F5-AKT-00	DM150F5-AKT-01	3~380	50/60	10500	6180	1650	1350	2.2	85

