




EC Centrifugal Blower Backward curved
EC后向式离心风机φ560





EC Centrifugal Blower Backward curved
EC后向式离心风机φ560

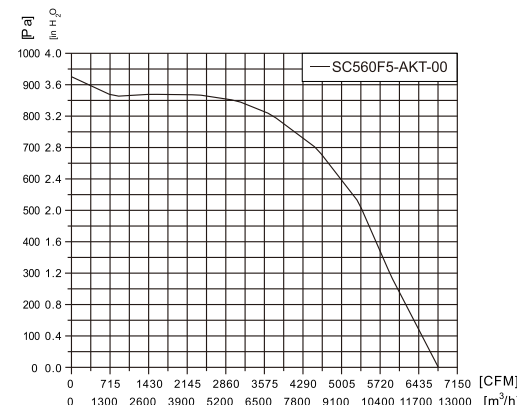

Material: Impeller made of aluminum alloy
Type of protection: IP54
Technical features: Control input 0-10VDC / PWM Tachoutput, RS485 MODBUS
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited, Under-voltage and over-voltage lockout protection, Soft start, phase failure detection
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CQC
Amb.Temp: -25°C~+60°C

材料: 风轮采用铝合金制成
电机防护等级: IP54
电气性能: 控制型号输入0-10VDC/PWM速度反馈信号, RS485通讯
轴承: 滚珠轴承
保护: 堵转保护、限流保护、低电压和过电压停止运转保护、软启动、缺相保护
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CQC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC560F5-AKT-00	DM150F5-AKT-02	3~380	50/60	12500	7357	1500	1750	2.7	85

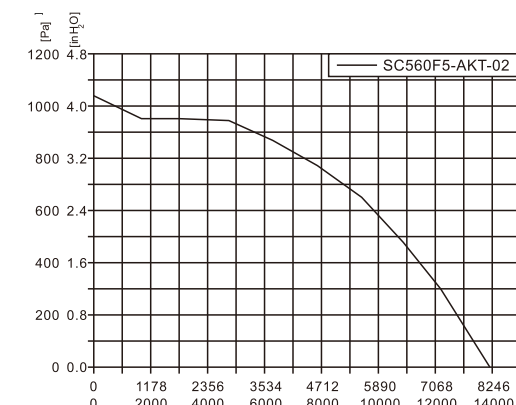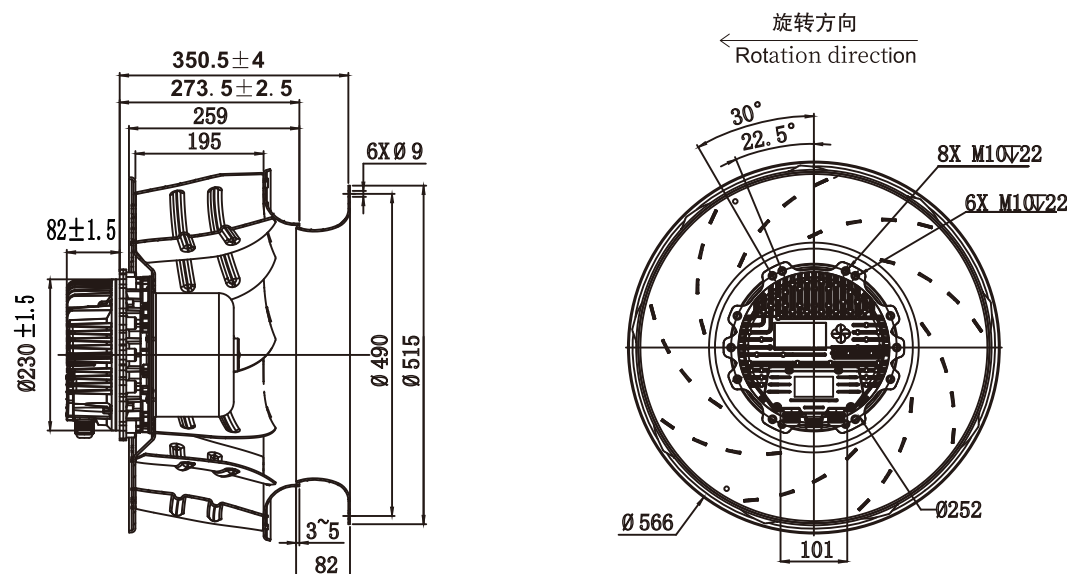

Material: Impeller made of PA66
Type of protection: IP54
Technical features: Control input 0-10VDC / PWM, Tach output, RS485 MODBUS
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited, Under-voltage and over-voltage lockout protection, Soft start, phase failure detection
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CQC
Amb Temp: -25°C~+60°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP54
电气性能: 控制型号输入0-10VDC/PWM速度反馈信号, RS485通讯
轴承: 滚珠轴承
保护: 堵转保护、限流保护、低电压和过电压停止运转保护、软启动、缺相保护
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CQC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC560F5-AKT-02	DM150F5-AKT-02	3~380	50/60	13800	8127	1580	1900	3.1	85

