



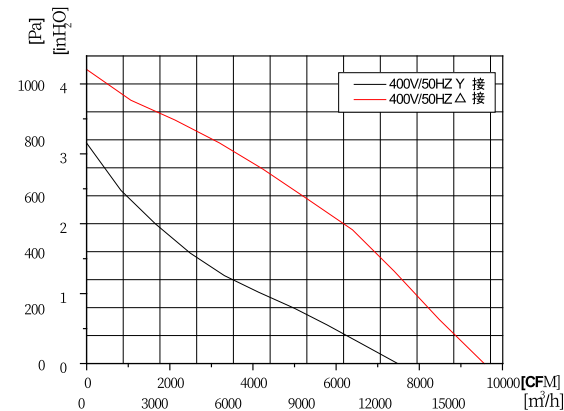

Material: Impeller made of sheet aluminum
Type of protection: IP20
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料：风轮采用铝合金制成
电机防护等级:IP20
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护工功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

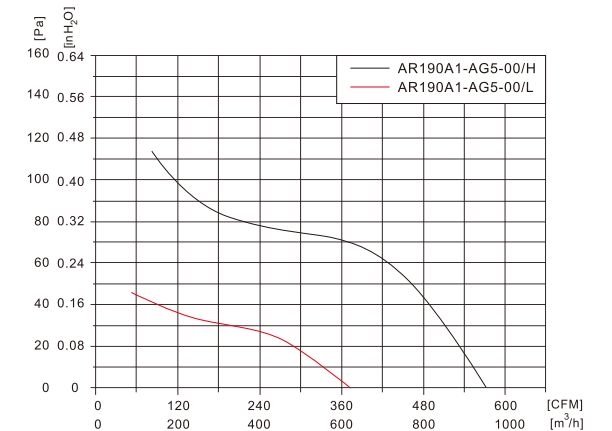

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC630B2-AL5-01	AM137B2-AL5-09	3~400(Δ)	50	17000	10006	1380	2400	4.2	87	/

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AR190A1-AG5-00	AM068A1-AG5-29	230	50	2.5/450	800/540	471/318	2450/1650	80/55	0.35/0.26	70

