



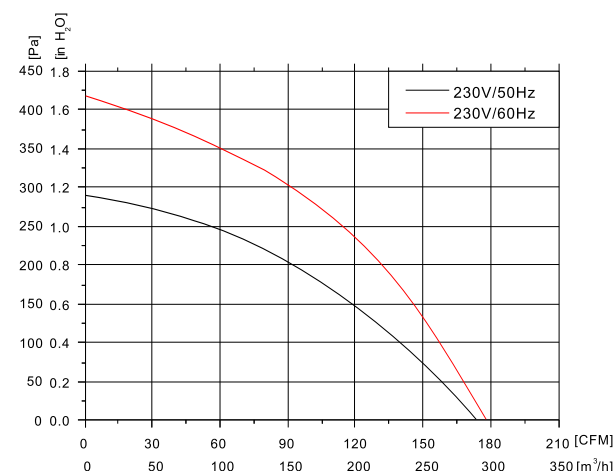

Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP23
Bearing : Ball bearing
Operation Mode: (S1)
Protection : Thermal overload protector(TOP)wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CCC
Amb Temp:-40°C~+65°C

材料:蜗壳和风轮采用冷轧板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SH120A1-AGT-00	FW068-0152E04	1~230	50	170	100	2180	81	0.37	67	2/450
			60	175	103	2210	95	0.42	67	

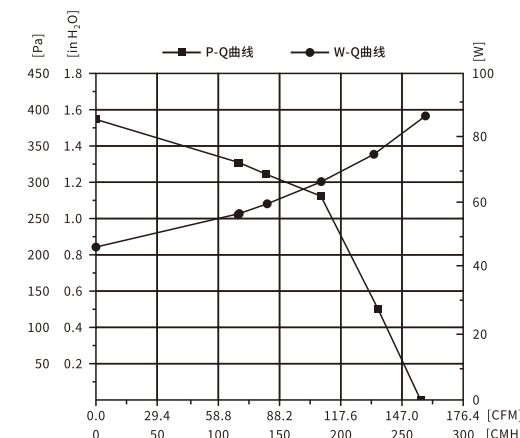

Material: The Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: B
Direction of rotation: Unticlockwise see on the leads
Approvals:UL
Amb.Temp:-25°C~+40°C

材料:蜗壳和风轮采用冷轧板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:UL
工作温度范围:-25°C~+40°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SH120A1-AC6-01	AM068A1-AC6-23	1~115	60	265	156	2070	91	0.82	63	6/250

