

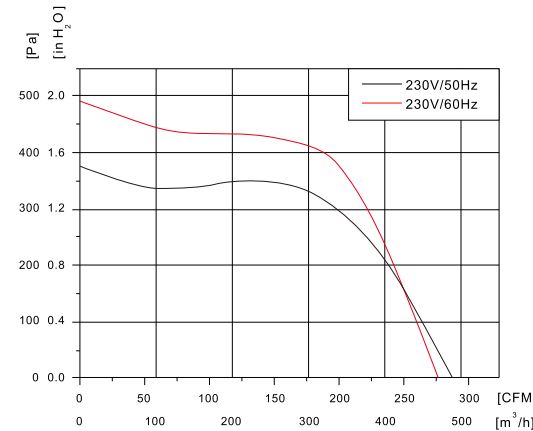
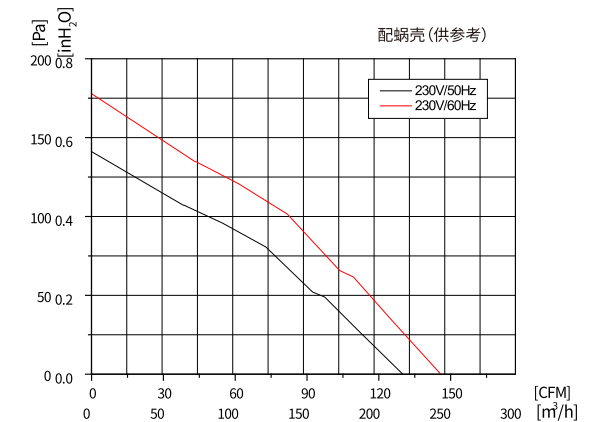


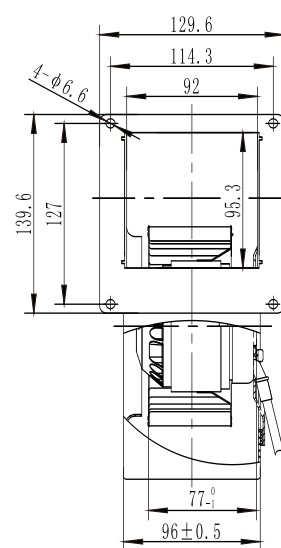

Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP23
Bearing : Ball bearing
Operation Mode: (S1)
Protection : Thermal overload protector(TOP)wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CCC、CE
Amb Temp:-40°C~+65°C

材料:蜗壳和风轮采用冷轧板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SH140A1-AGT-01	FW068-0352E47	1~230	50	480	283	2050	156	0.68	71	2/450
			60	460	271	2000	184	0.8	71	

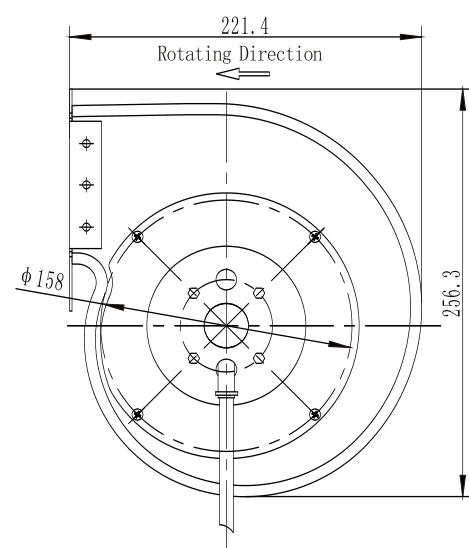

Material: Impeller made of galvanized sheet steel
Type of protection:IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals:CCC
Amb.Temp:-40°C~+65°C

材料:风轮采用冷轧板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC120A1-AGT-00	AM068A1-AGT-78	1~230	50	(252)	(148)	2450	68	0.33	65	2/450
			60	(283)	(167)	2750	71	0.31	68	

