



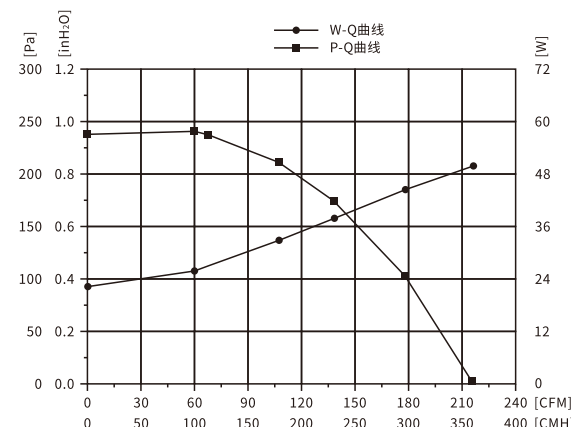

Material: Scroll housing made of plastic PP, impeller made of galvanized sheet steel
Type of protection : IP42
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads.
Approvals: CCC, CE
Amb.Temp: -25°C~+60°C

材料: 蜗壳采用塑料PP, 风轮采用镀锌板
电机防护等级: IP42
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SH140D3-DC0-00	DM075D3-DC0-09	24	/	348	205	1830	50	2.1	65

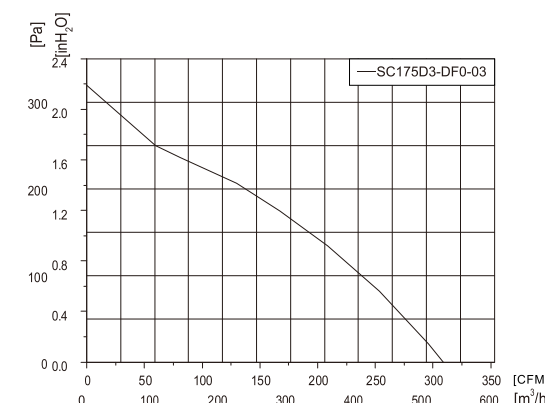

Material: Impeller completely made of plastic PA66
Type of protection : IP42
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads.
Approvals: CCC
Amb Temp: -25°C~+60°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP42
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175D3-DF0-03	DM055D3-DF0-07	48	/	510	300	3000	30	0.61	70

