

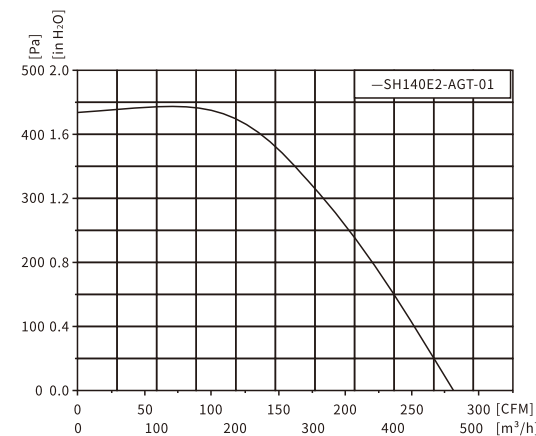


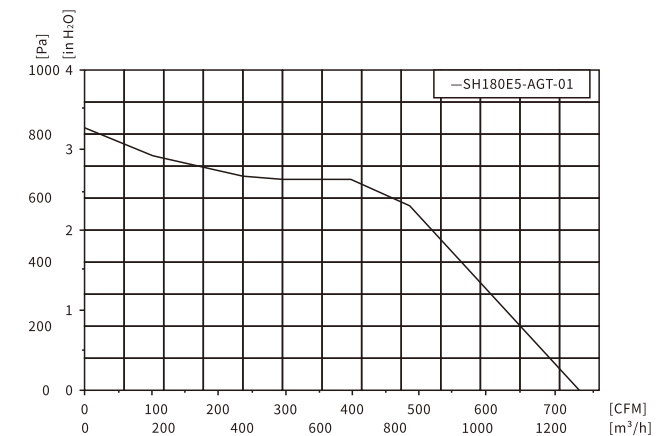

Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP42
Bearing : Ball bearing
Technical features : Control input 0-10VDC / PWM, Tach output
Protection : Locked-rotor protection , Current limited, Under-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class : F
Direction of rotation : Anticlockwise . see onlead
Approvals : CCC : 2012010401544876
Amb Temp : -25°C~+60°C

材料:蜗壳和风轮采用镀锌板制成
防护等级:IP42
轴承:滚珠轴承
电气性能:控制信号输入0-10VDC/PWM速度反馈信号
保护:堵转保护、限流保护低电压和过电压停止运转保护、软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC:2012010401544876
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SH140E2-AGT-01	DM055E2-AGT-01	1~230	50/60	470	277	1700	75	0.6	68

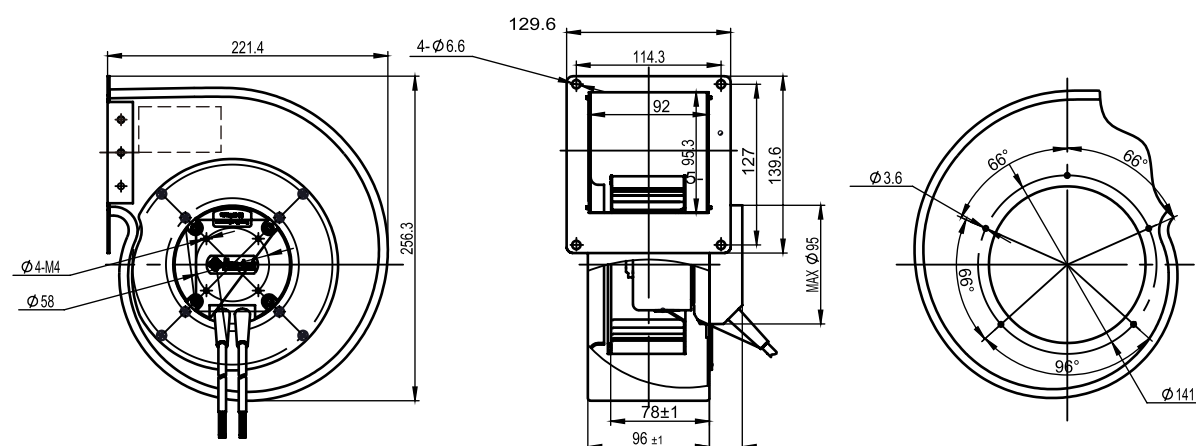

Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP44
Bearing : Ball bearing
Technical features : Control input 0-6.5VDC / PWM Tach output
Motor protection : Locked-rotor protection , Current limited, Under-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class : F
Direction of rotation : U anticlockwise see on the leads
Approvals : CCC , CE
Amb Temp : -25°C~+60°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级: IP44
轴承:滚珠轴承
电气性能:控制信号输入0-6.5VDC/PWM速度反馈信号
保护:堵转保护、限流保护低电压和过电压停止运转保护
软启动绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证: CCC , CE
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SH180E5-AGT-01	DM088E5-AGT-17	1~230	50/60	1250	736	2250	460	3.1	78

