



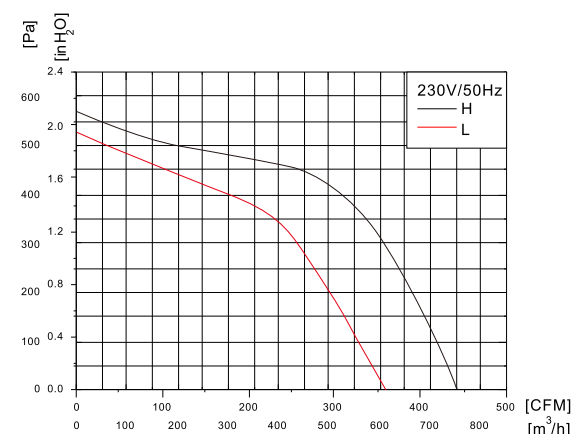

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearings
Operation Mode: (S1)
Protection: Thermal Overload Protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CE, CCC
Amb. Temp: -40°C~+65°C

材料: 蜗壳和轮采用镀锌板制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为顺时针
产品符合的认证: CCC、CE
工作温度范围: -40°C~+65°C

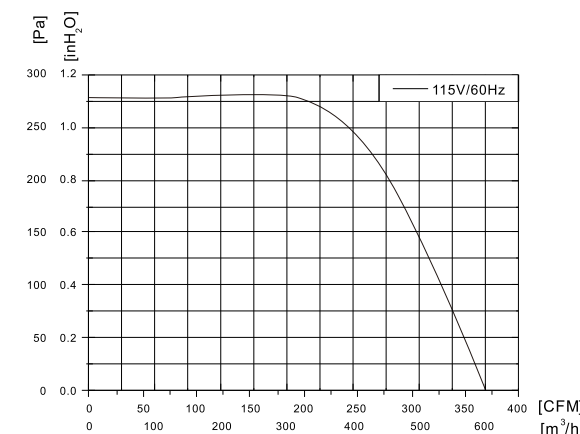

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Anticlockwise, see on the leads
Approvals: CE
Amb. Temp: -40°C~+65°C

材料: 蜗壳和风轮采用镀锌板制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)	Capacitor (μF/V)
SH160A1-AG5-00	AM068A1-AG5-00	230	50	H	750	440	1700	310	1.35	73	8/450
				L	610	360	1250	245	1.05	70	

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)	Capacitor (μF/V)
SH180A2-AC6-04	FW068-0354E05	1~115	60	595	350	1200	158	1.5	67	10/250

