

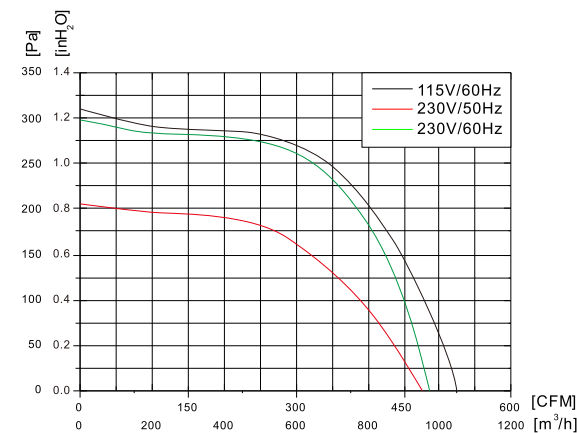


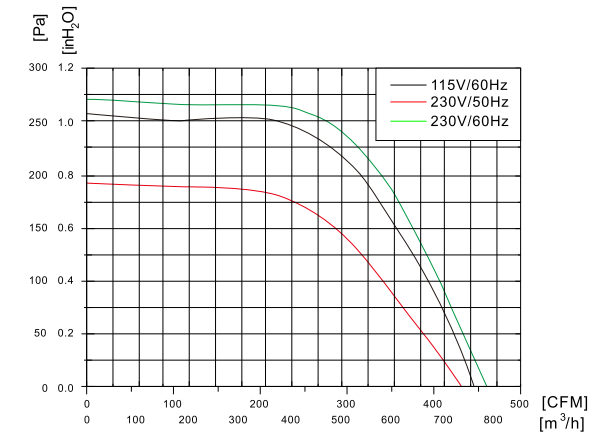

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC、CE
Amb Temp: -40°C~+65°C

材料:蜗壳和轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SH180A2-AGT-01	AM074A2-AGT-09	230	50/60	950/970	560/570	1300/1350	194/255	0.91/1.15	71	6/450
SH180A2-AC6-02	FW074-0354E17	115	60	1040	612	1400	295	2.6	74	20/250

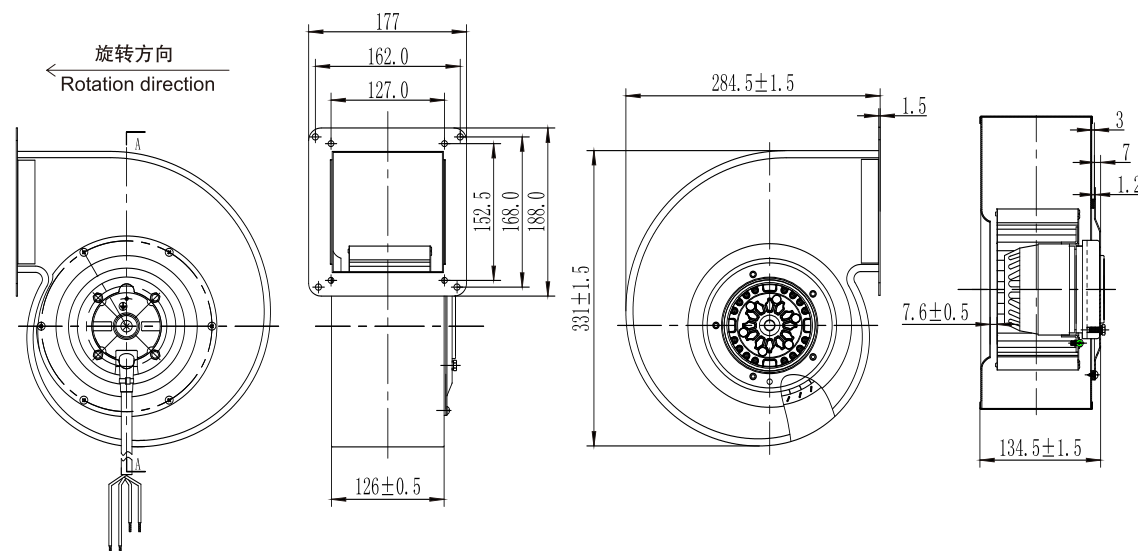

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals:CE、CCC
Amb.Temp:-40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SH180A2-AGT-14	FW074-0354E15	230	50/60	740/780	435/460	1320/1420	140/188	0.61/0.82	70	5/450
SH180A2-AC6-03	FW074-0354E12	115	60	770	453	1400	185	1.6	72	16/250

