



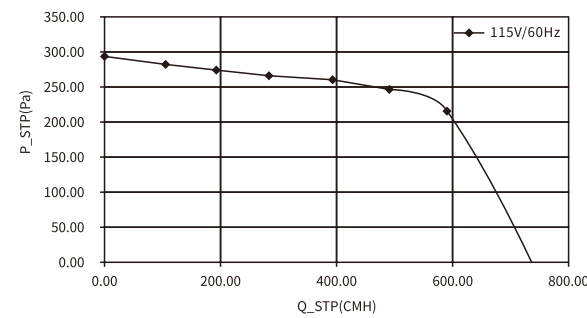

Material: Impeller made of SPCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料:叶轮由SPCC材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor ($\mu F/V$)	Airflow (m^3/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SH180A2-AC6-10	AM074A2-AC6-03	115	60	16/250	740	435	1400	185	1.6	72

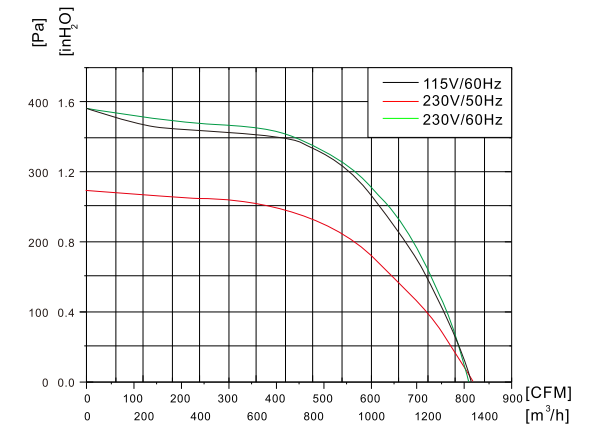

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Anticlockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m^3/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor ($\mu F/V$)
SH200A2-AGT-00	AM074A2-AGT-00	230	50/60	1350/1320	800/780	1300/1340	280/375	1.3/1.7	72	8/450
SH200A2-AC6-00	AM074A2-AC6-00	115	60	1350	795	1310	375	3.23	72	35/250

