


R09R-3332A-4M-4228

Plastic Blades with guard grill for short inlet


Ordering code: 0309-4-0243

Operating Point		Nominal data		Erp Data (This fan is not subject to the EU ErP regulation)	
Air flow [m ³ /h]	1281	Phase [~]	1	Overall efficiency [%]	N/A
Static pressure [Pa]	63	Voltage [V]	230 / 230	Measurement cat.	N/A
Density [kg/m ³]	1.2	Voltage range [V]	N / A	Efficiency category	N/A
Total pressure [Pa]	71	Frequency [Hz]	50 / 60	Efficiency grade N	N/A
Rotation speed [1/min]	1378	Input power [W]	110 / 145	Variable speed drive	N/A
Input power [W]	102	Input current [A]	0.45 / 0.65	Power input [kW]	N/A
Current [A]	0.45	Nominal speed [rpm]	1360 / 1490	Airflow [m ³ /h]	N/A
Total efficiency [%]	25	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	N/A
Static efficiency [%]	22	Max. ambient temp. [°C]	55	Rotational Speed [rpm]	N/A
Sound power [dB]	0	Protection class	IP54	Specific ratio	N/A
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	4.00		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	N / A		
		Weight [Kg]	5.5		

Static pressure

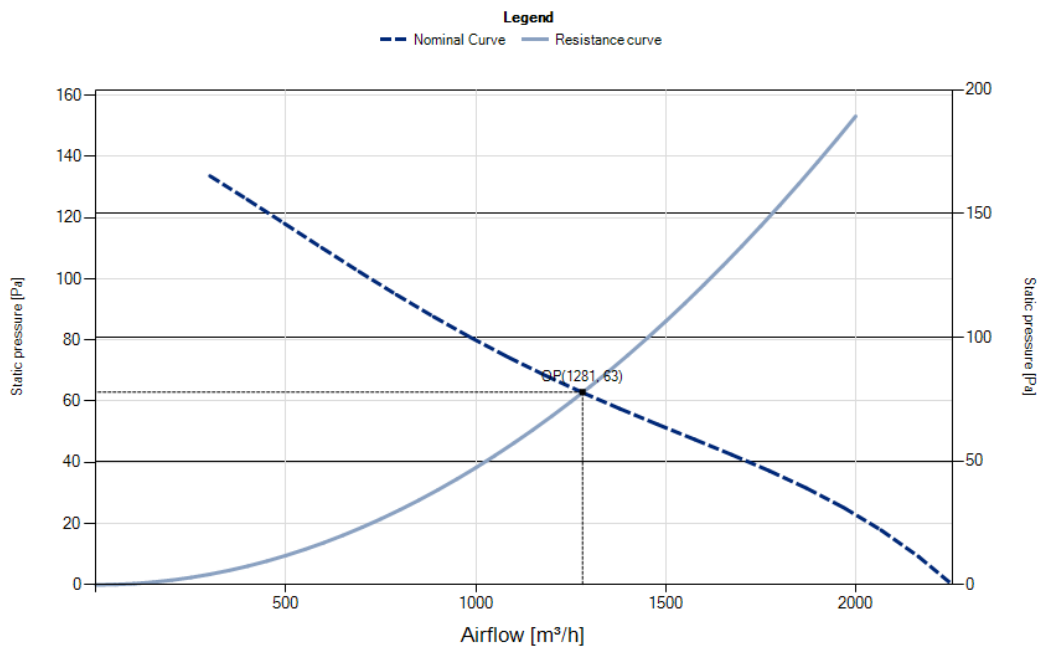

Total pressure

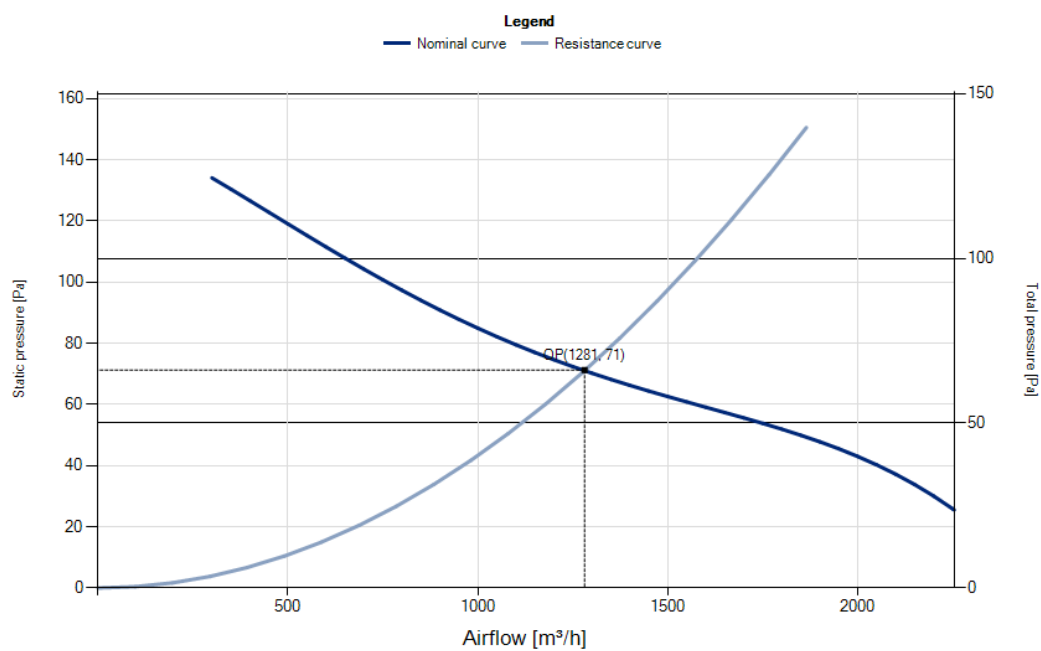

Input power

