


R11P-4035P-4T2-5745



Stamped Aluminium Blades with guard grill and wall plate long inlet



Ordering code: 0311-4-0226

Operating Point		Nominal data		Erp Data	
Air flow [m ³ /h]	3378	Phase [~]	3	Overall efficiency [%]	30.9
Static pressure [Pa]	45	Voltage [V]	400 / 400 / 460 / 400 / 400 / 460	Measurement cat.	A
Density [kg/m ³]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	78	Frequency [Hz]	50 / 60 / 60 / 50 / 60 / 60	Efficiency grade N	40.7
Rotation speed [1/min]	1284	Input power [W]	220 / 290 / 330 / 280 / 420 / 440	Variable speed drive	NO
Input power [W]	164	Input current [A]	0.35 / 0.47 / 0.46 / 0.60 / 0.70 / 0.69	Power input [kW]	0.28
Current [A]	0.27	Nominal speed [rpm]	1190 / 1065 / 1240 / 1400 / 1585 / 1645	Airflow [m ³ /h]	3378
Total efficiency [%]	45	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	95
Static efficiency [%]	26	Max. ambient temp. [°C]	70	Rotational Speed [rpm]	1400
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	N / A		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	Y / Y / Y / D / D / D		
		Weight [Kg]	4.0		


Static pressure

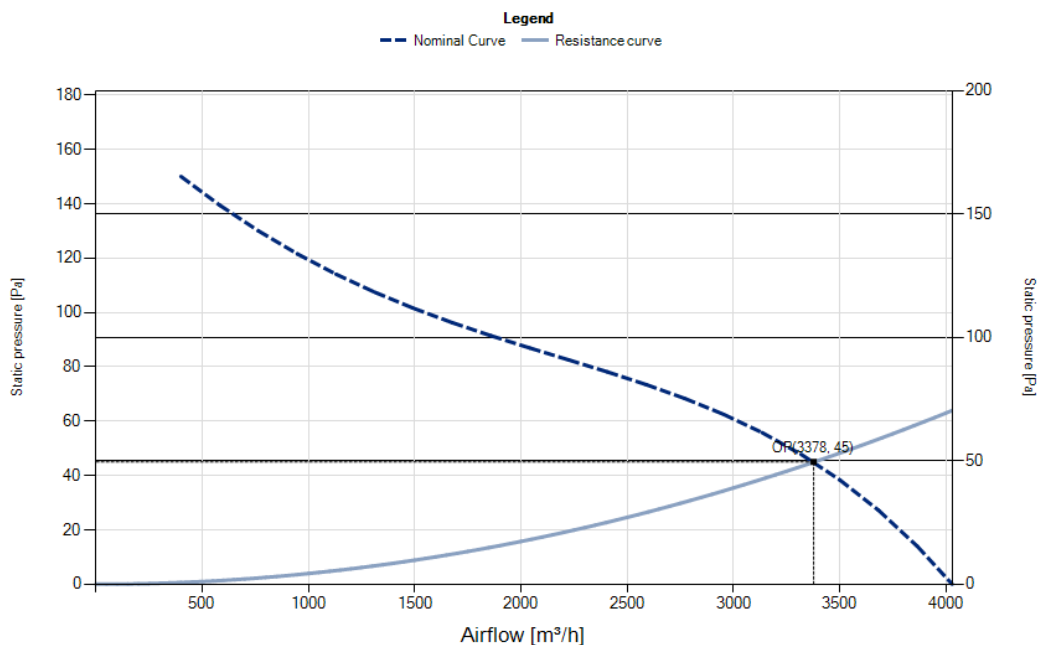

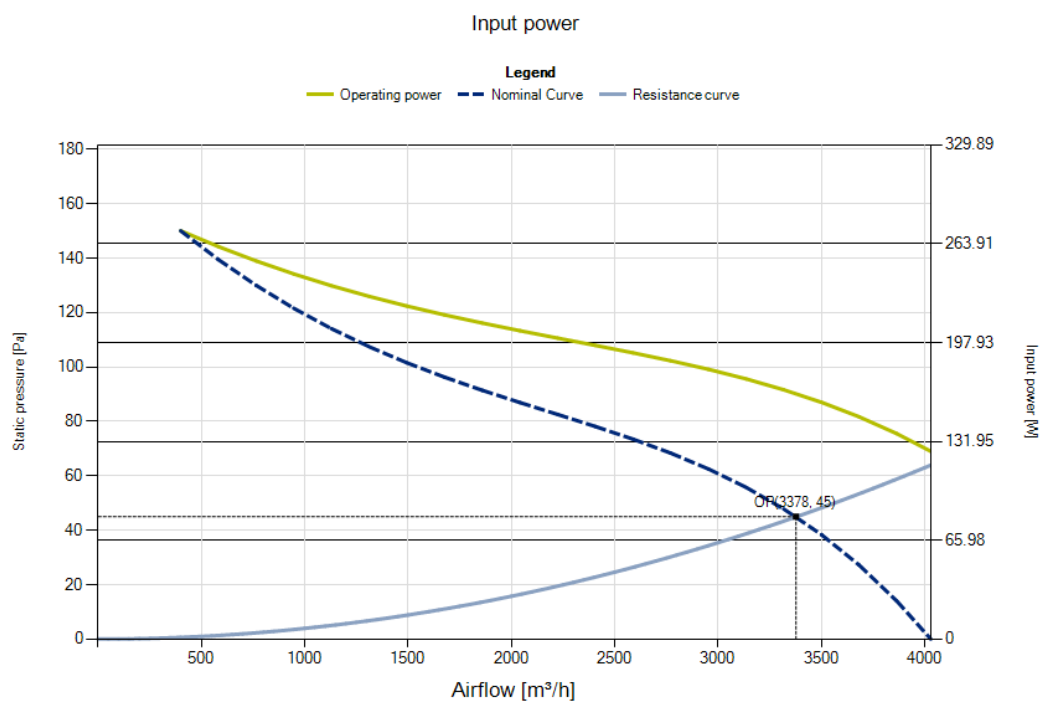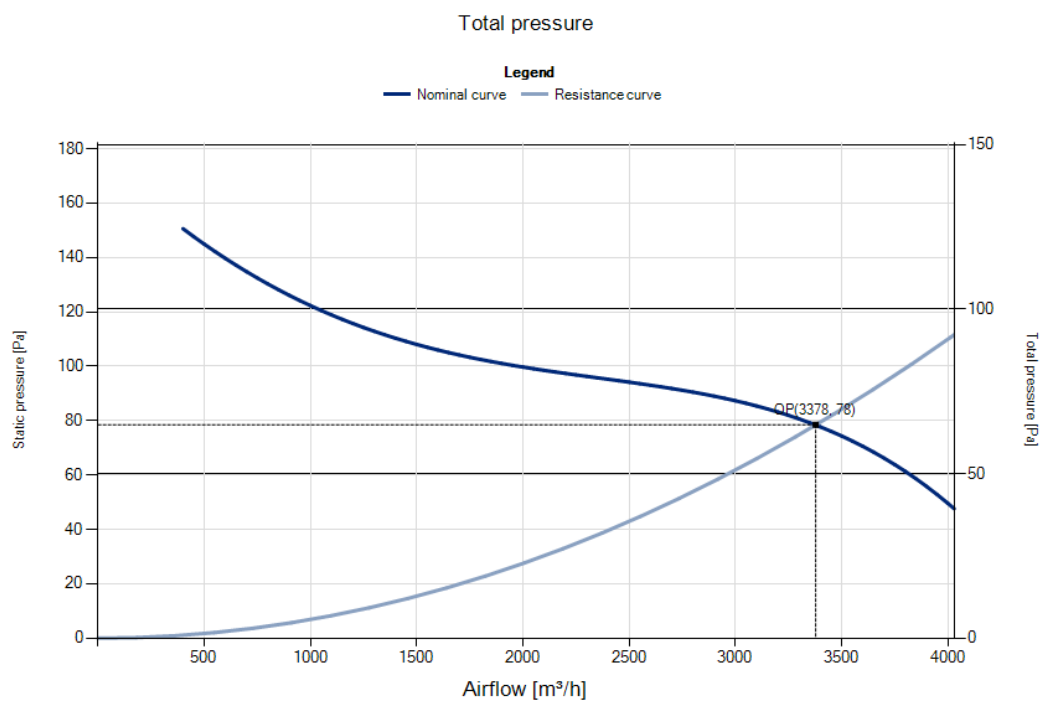

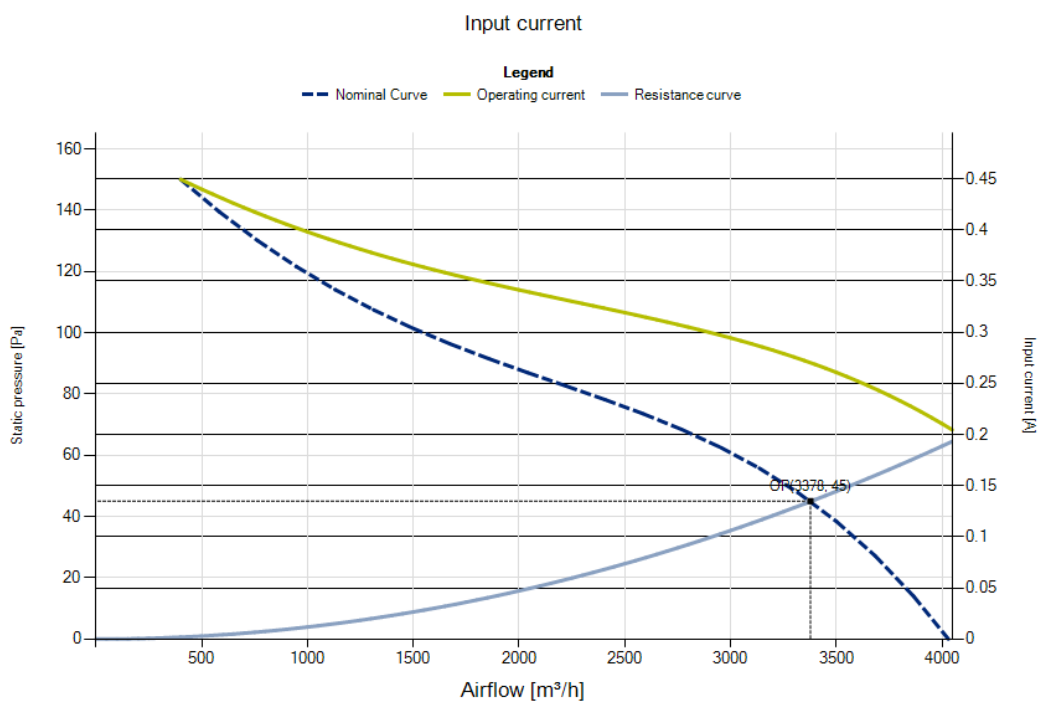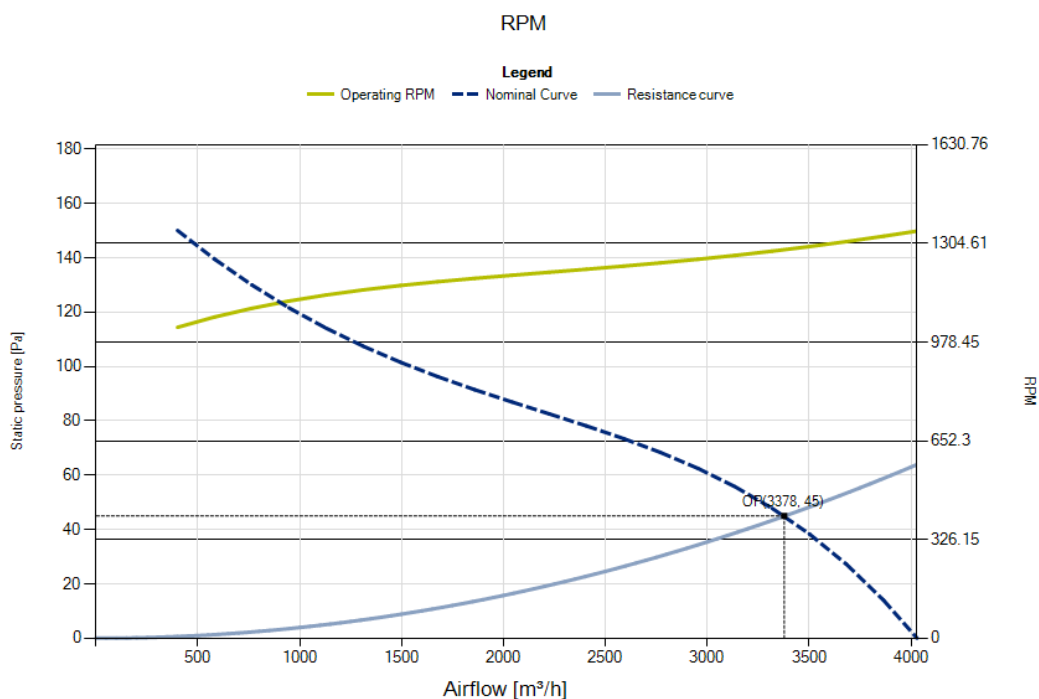

Specific fan power

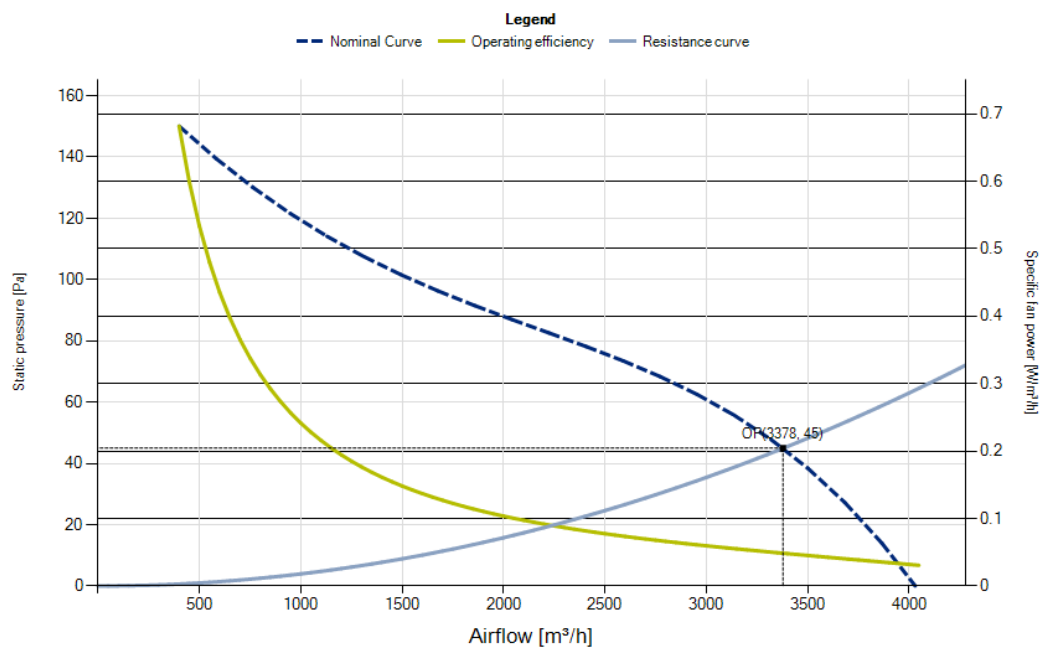

Overall static efficiency

