


R13P-5030HA-6T2-5065

Stamped Aluminium Blades with guard grill and wall plate long inlet


Ordering code: 0313-4-1087

Operating Point		Nominal data		Erp Data	
Air flow [m ³ /h]	4334	Phase [~]	3	Overall efficiency [%]	27.3
Static pressure [Pa]	64	Voltage [V]	400 / 400	Measurement cat.	A
Density [kg/m ³]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	87	Frequency [Hz]	50 / 50	Efficiency grade N	37.1
Rotation speed [1/min]	937	Input power [W]	175 / 255	Variable speed drive	NO
Input power [W]	295	Input current [A]	0.31 / 0.67	Power input [kW]	0.29
Current [A]	0.77	Nominal speed [rpm]	870 / 960	Airflow [m ³ /h]	4334
Total efficiency [%]	35	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	67
Static efficiency [%]	26	Max. ambient temp. [°C]	65	Rotational Speed [rpm]	939
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	N / A		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	Y / D		
		Weight [Kg]	16.0		


Static pressure


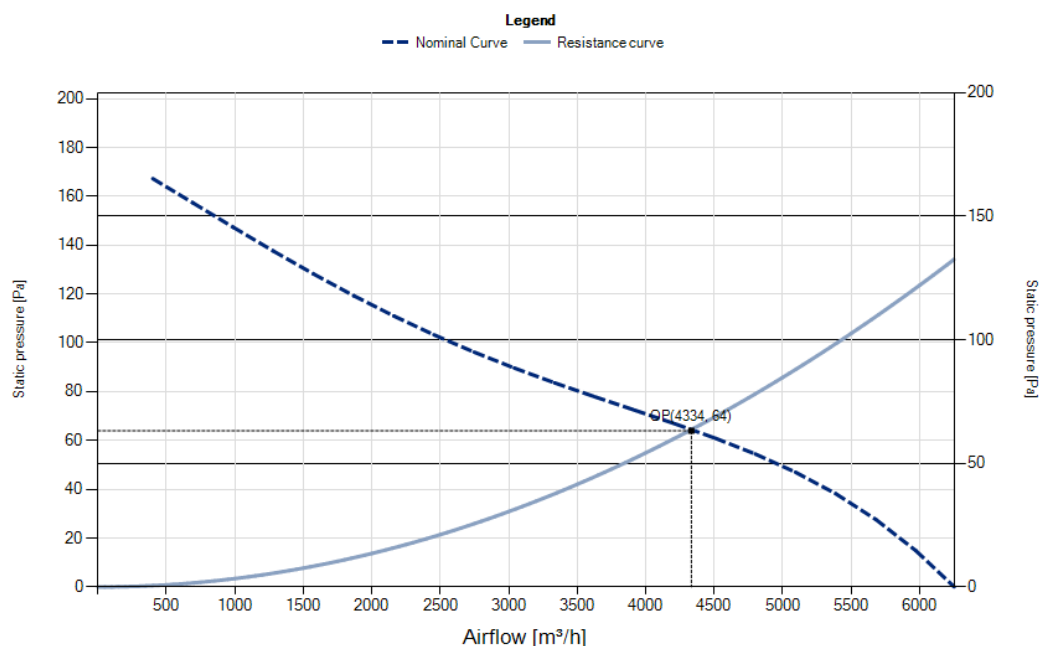


Total pressure

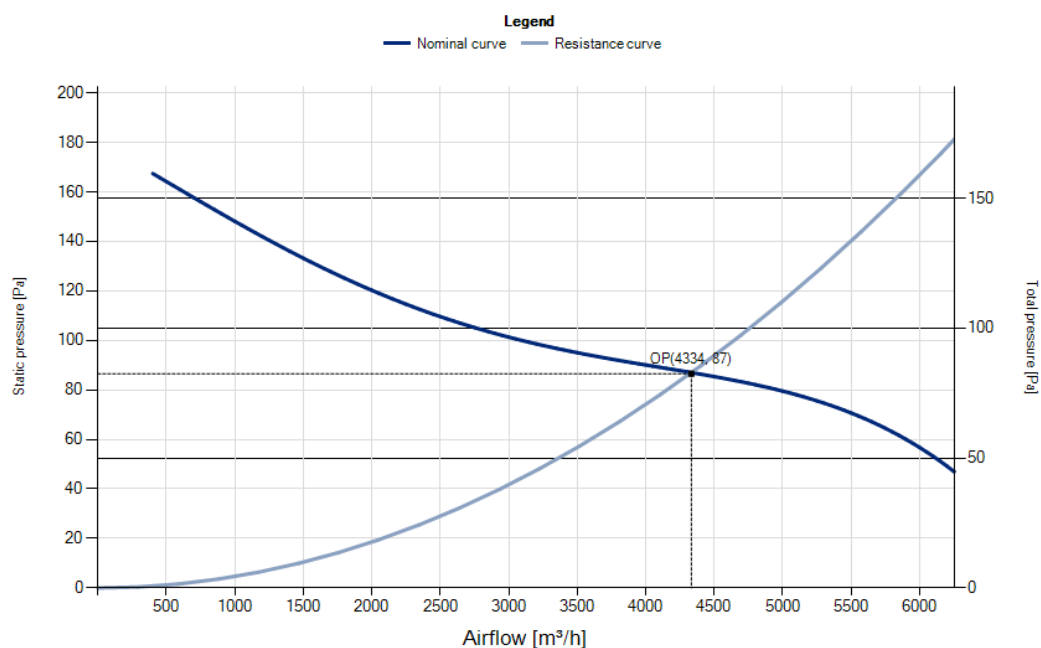


Input power

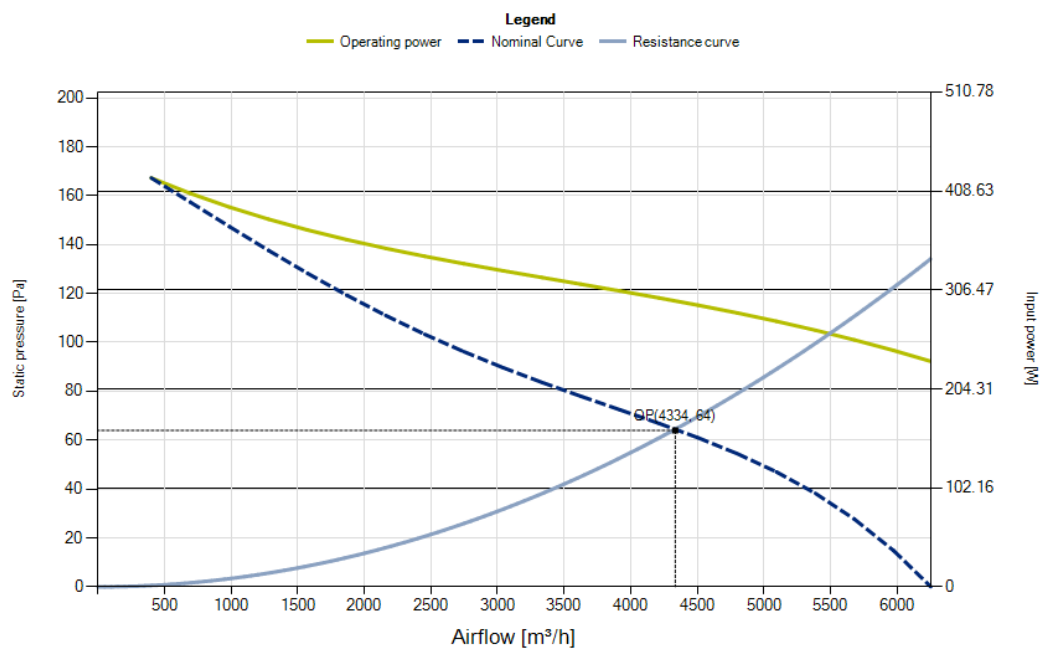

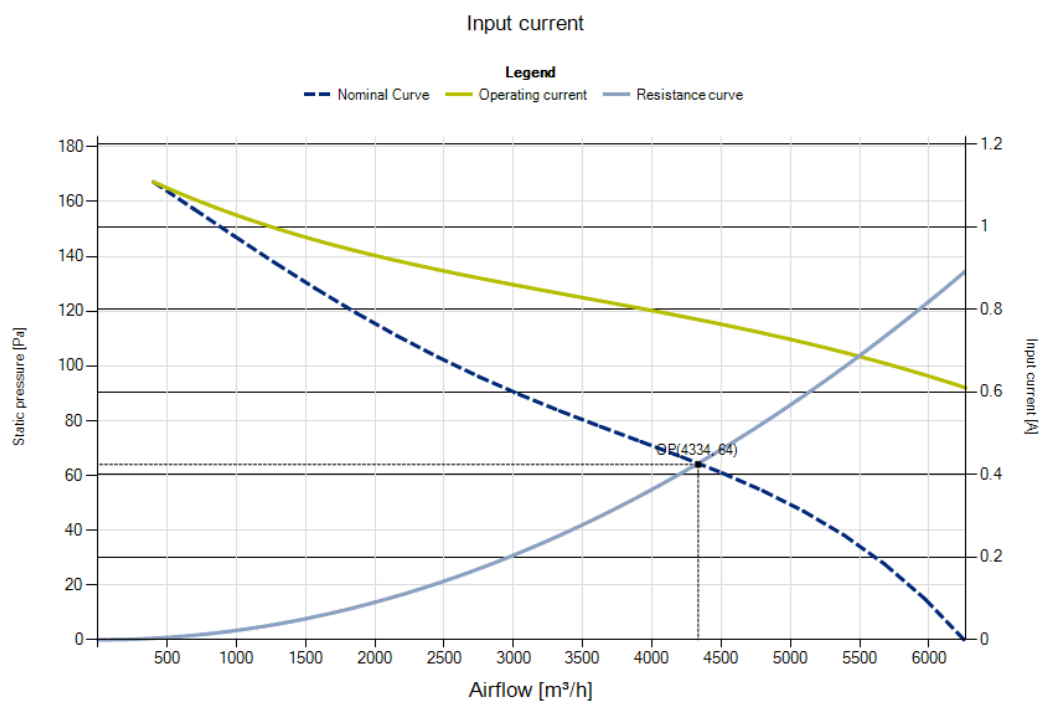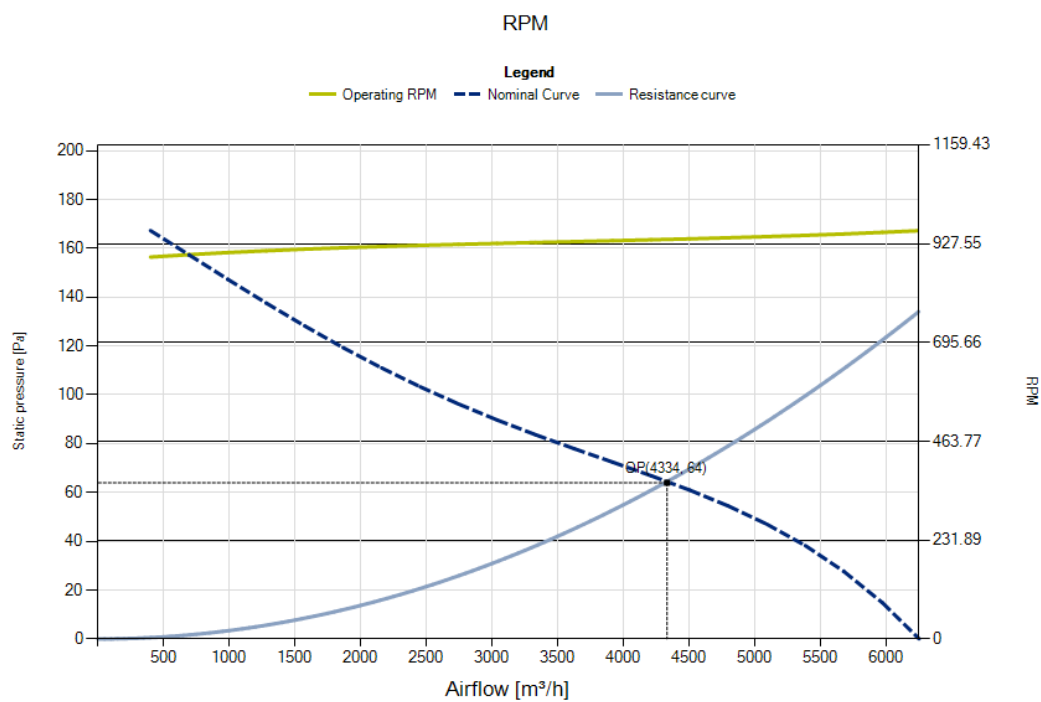

Specific fan power

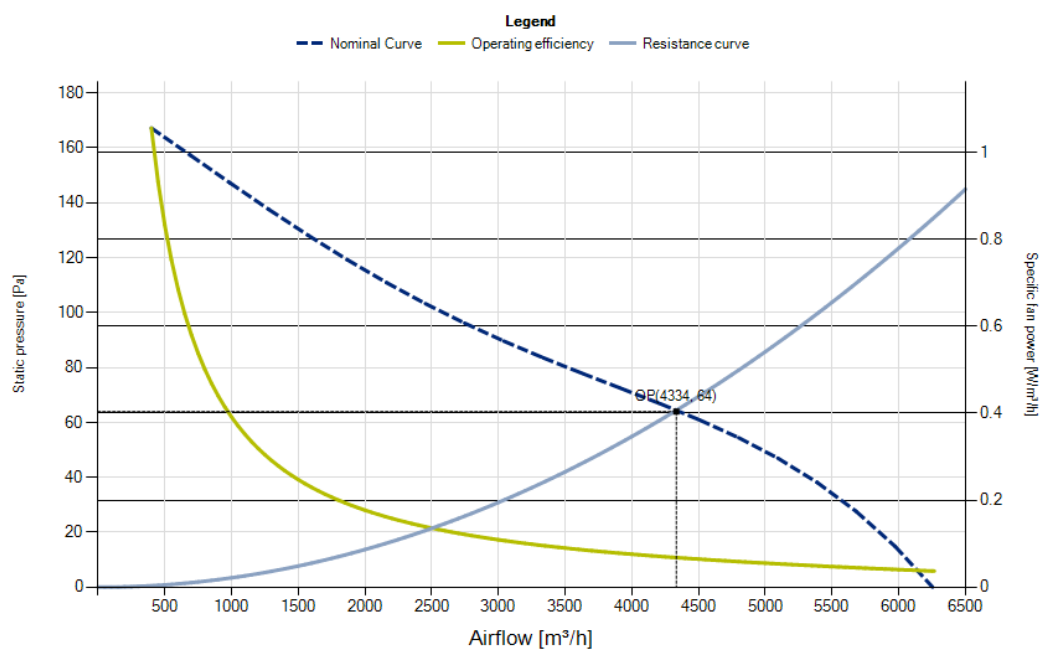

Overall static efficiency

