


R13R-4530HA-4M-5066

Stamped Steel Blades with guard grill for short inlet


Ordering code: 0313-4-1082

Operating Point		Nominal data		Erp Data	
Air flow [m3/h]	4694	Phase [~]	1	Overall efficiency [%]	27.5
Static pressure [Pa]	92	Voltage [V]	230	Measurement cat.	A
Density [kg/m3]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	132	Frequency [Hz]	50	Efficiency grade N	36.1
Rotation speed [1/min]	1370	Input power [W]	400	Variable speed drive	NO
Input power [W]	461	Input current [A]	1.80	Power input [kW]	0.44
Current [A]	2.06	Nominal speed [rpm]	1400	Airflow [m3/h]	4694
Total efficiency [%]	37	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	93
Static efficiency [%]	26	Max. ambient temp. [°C]	60	Rotational Speed [rpm]	1370
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	10.00		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	N / A		
		Weight [Kg]	10.0		


Static pressure


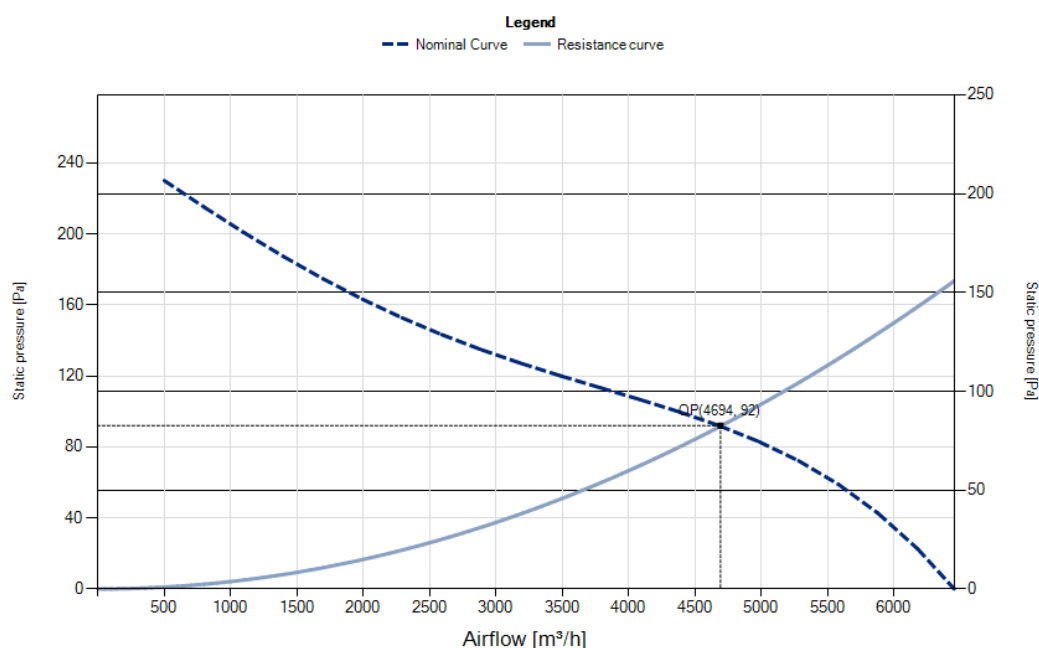


Total pressure

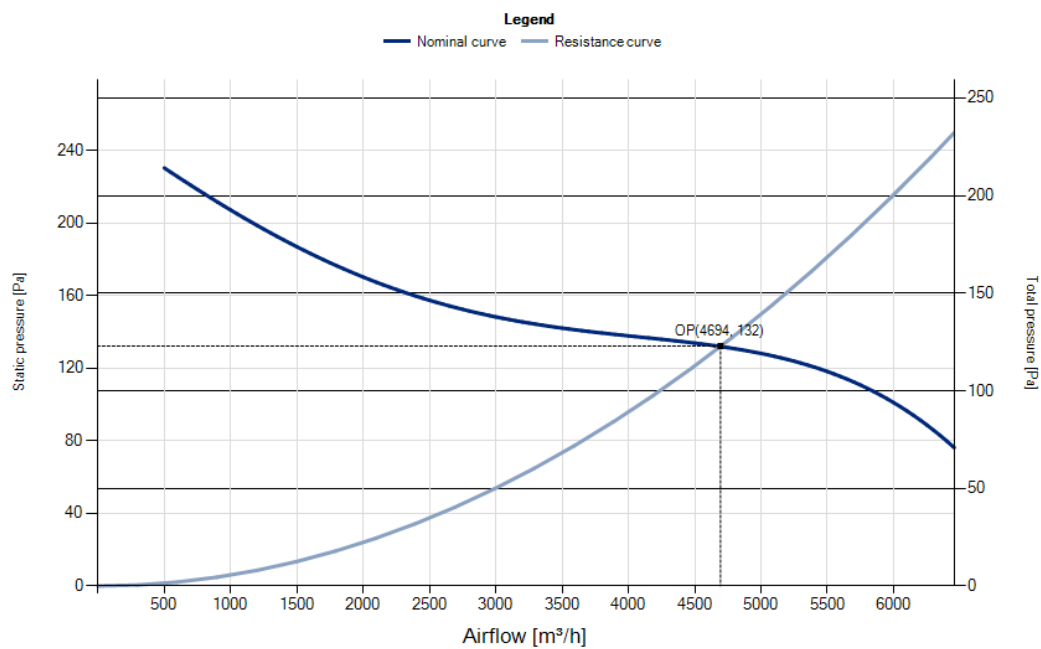


Input power

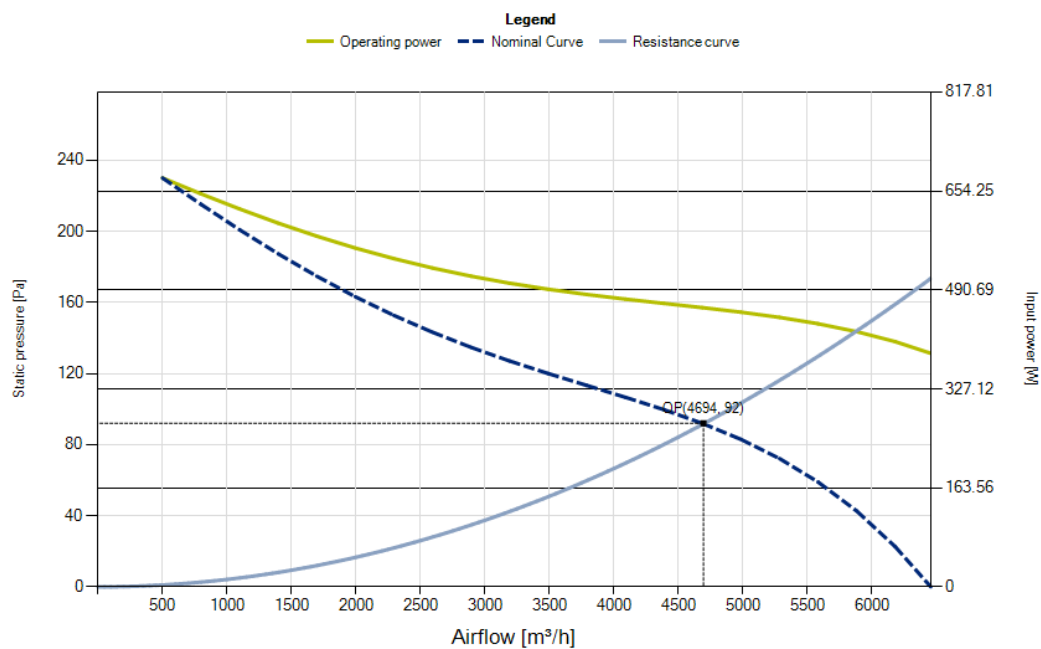


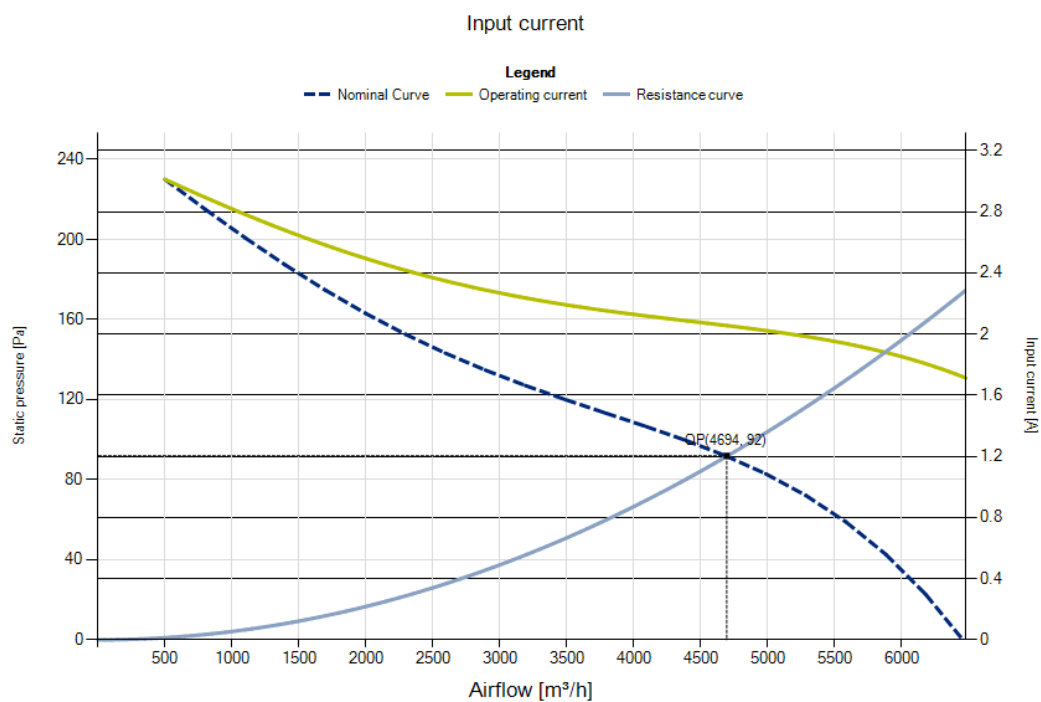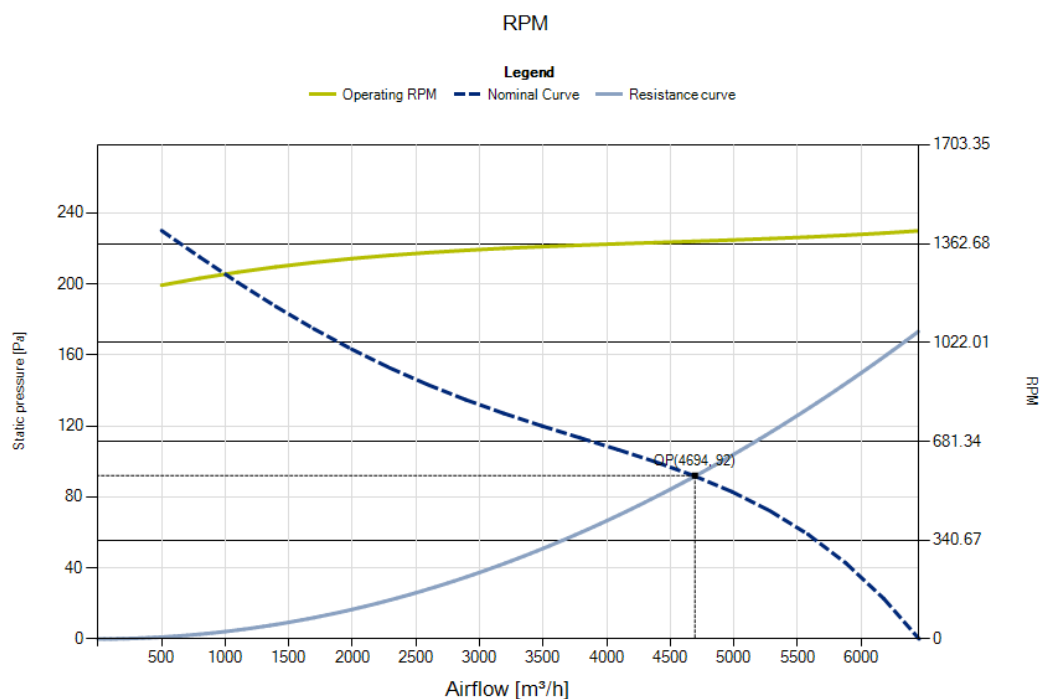


Specific fan power

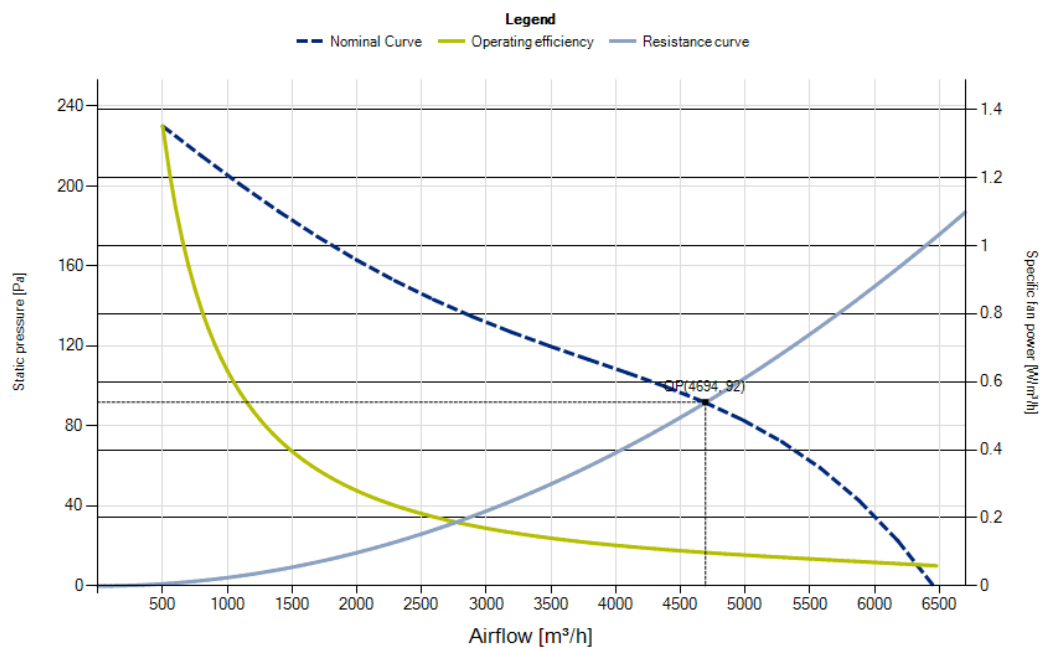

Overall static efficiency

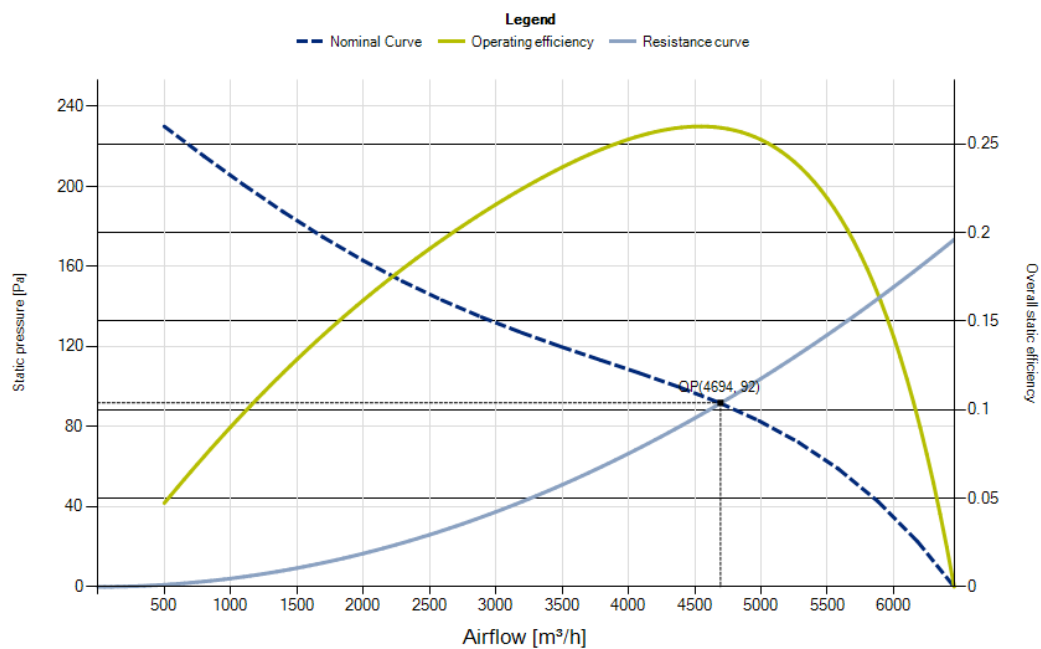

Total efficiency

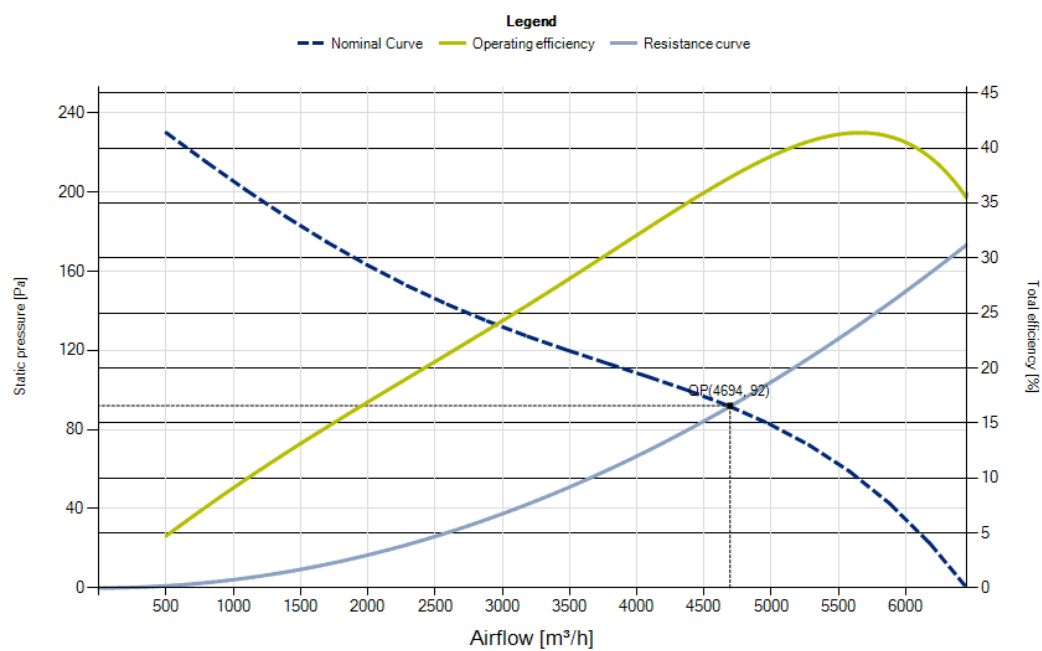

Static efficiency

