


R13R-4535A-6T2-3526



Stamped Aluminium Blades with guard grill for short inlet



Ordering code: 0313-4-0143

Operating Point		Nominal data		Erp Data	
Air flow [m ³ /h]	3031	Phase [~]	3	Overall efficiency [%]	25.7
Static pressure [Pa]	58	Voltage [V]	400 / 380 / 400 / 380	Measurement cat.	A
Density [kg/m ³]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	75	Frequency [Hz]	50 / 60 / 50 / 60	Efficiency grade N	36.5
Rotation speed [1/min]	907	Input power [W]	110 / 150 / 160 / 230	Variable speed drive	NO
Input power [W]	201	Input current [A]	0.19 / 0.26 / 0.37 / 0.46	Power input [kW]	0.20
Current [A]	0.48	Nominal speed [rpm]	765 / 730 / 915 / 1025	Airflow [m ³ /h]	3031
Total efficiency [%]	32	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	63
Static efficiency [%]	24	Max. ambient temp. [°C]	70	Rotational Speed [rpm]	906
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	N / A		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	Y / Y / D / D		
		Weight [Kg]	8.4		


Static pressure

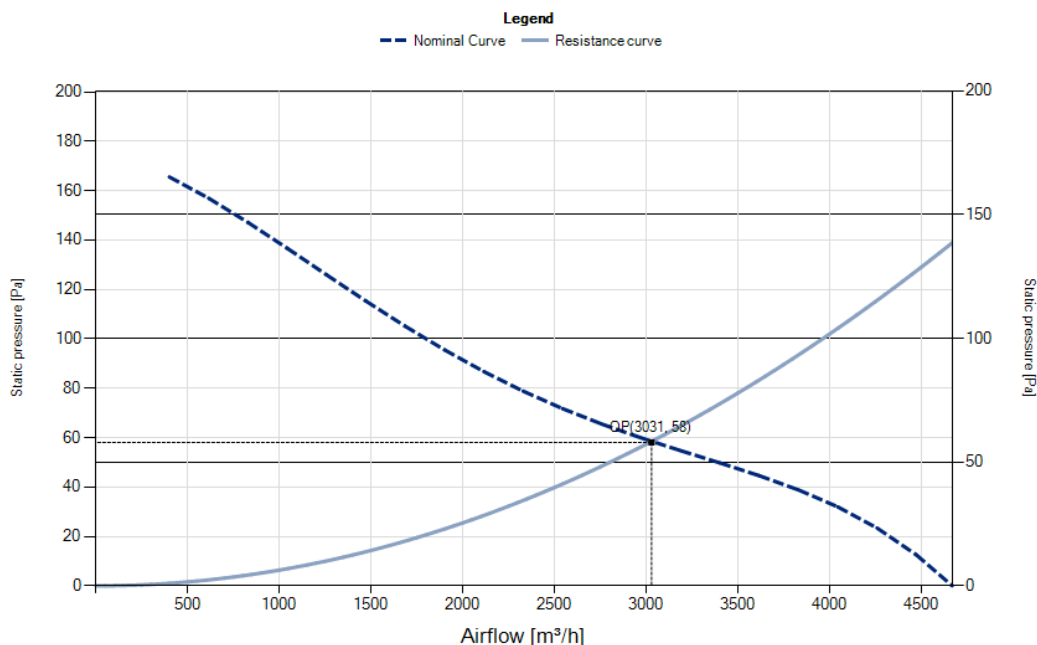

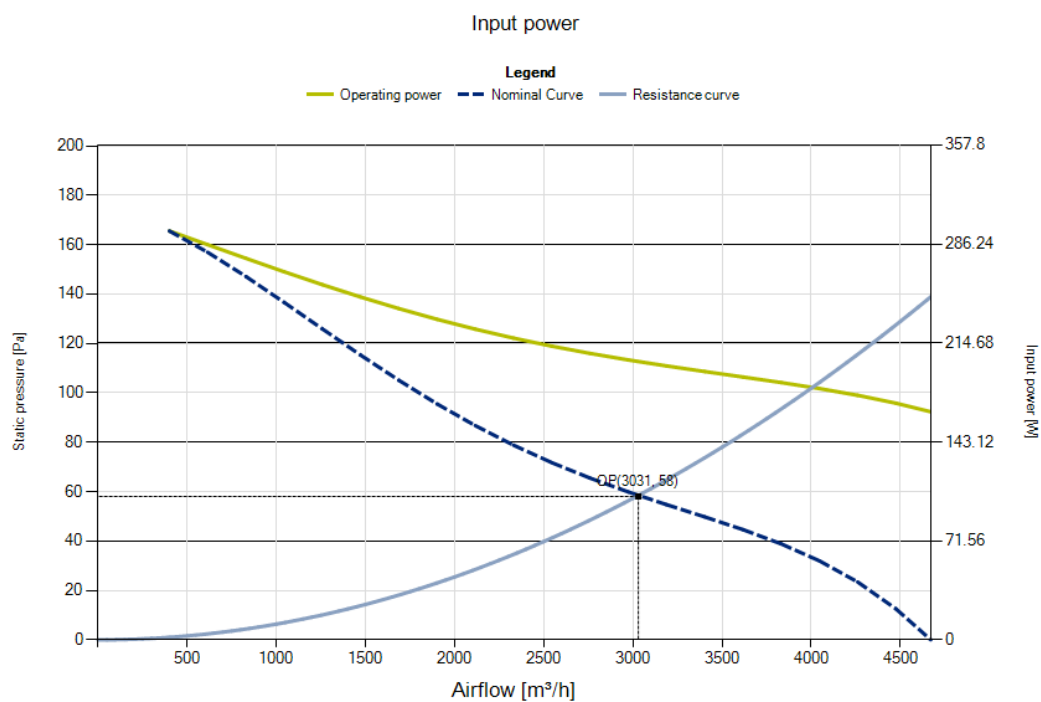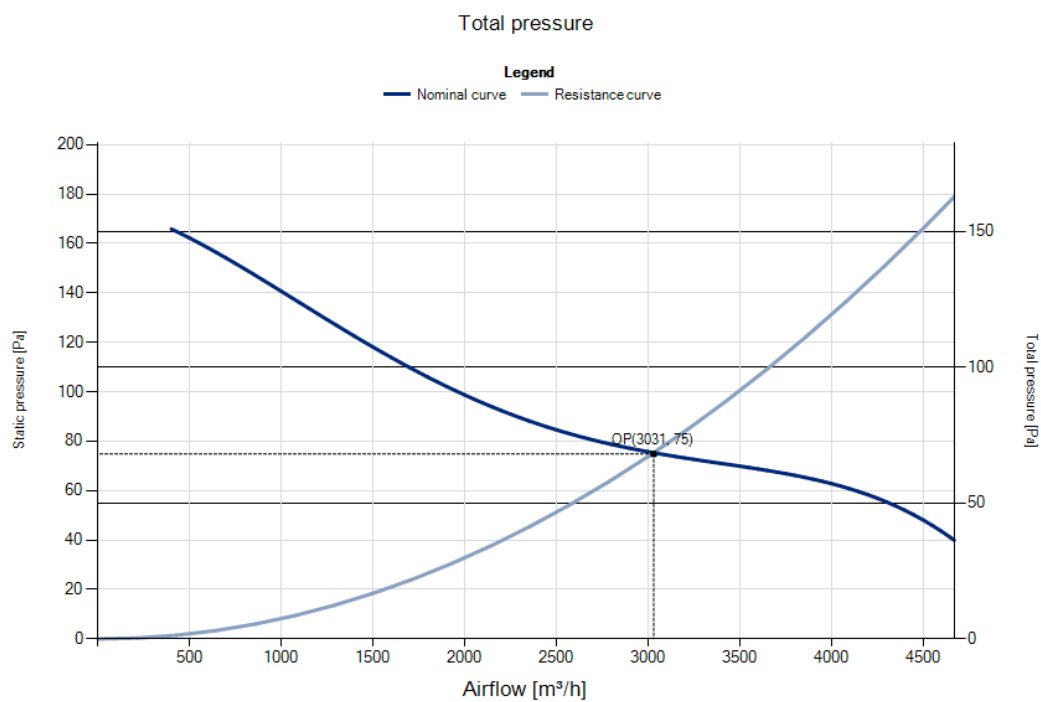

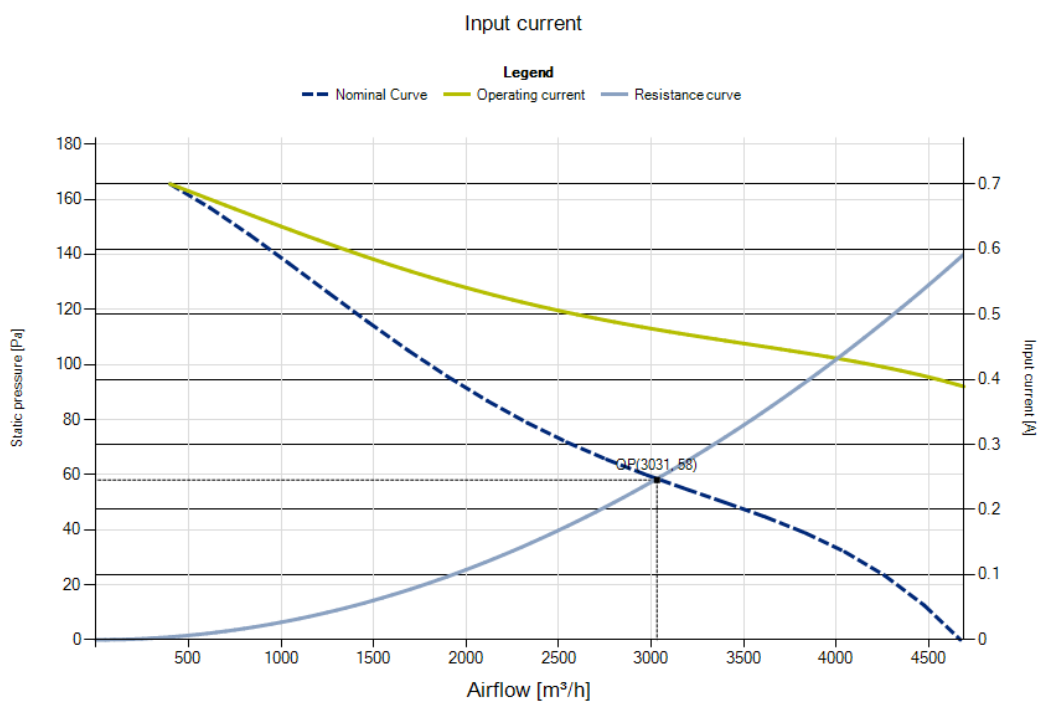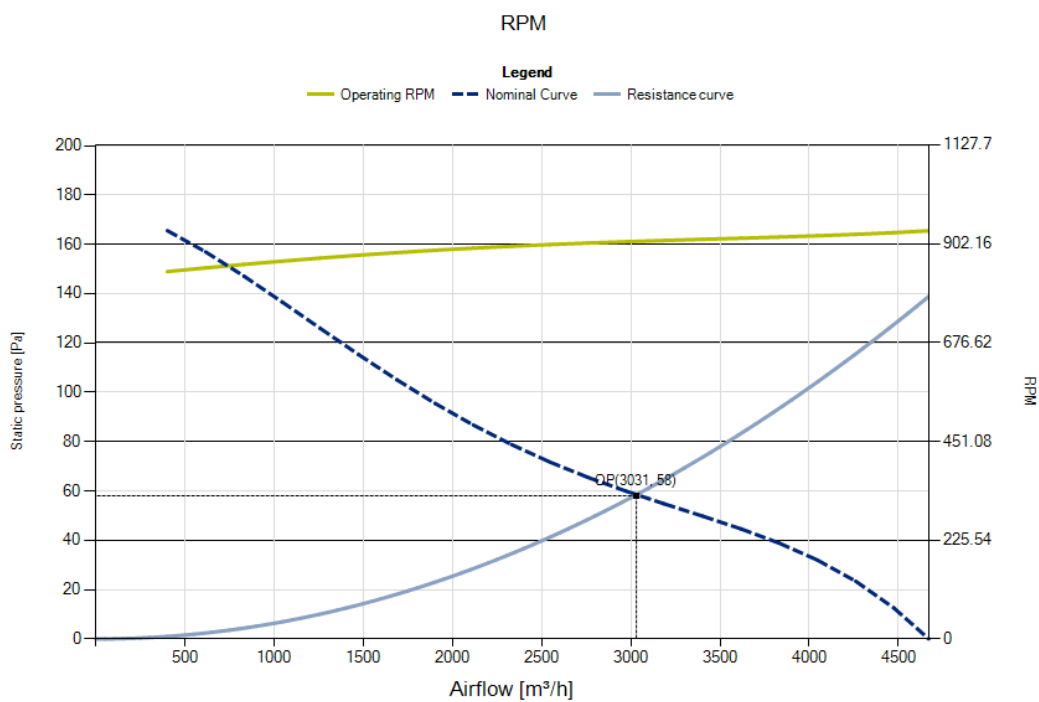

Specific fan power

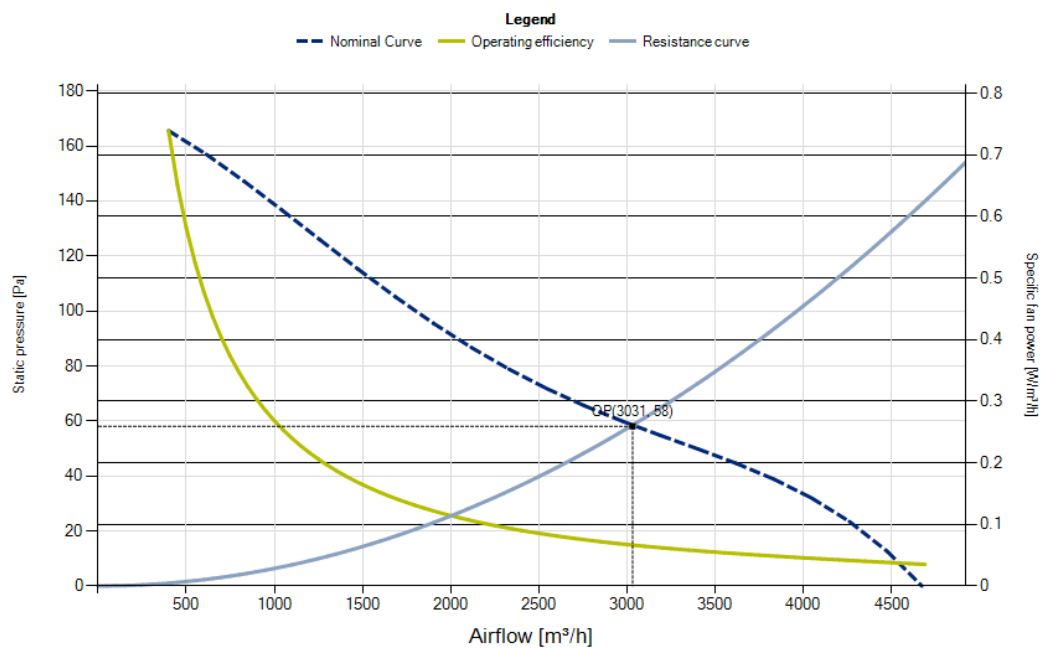

Overall static efficiency

