


R13R-5625P-6M-X093



Stamped Aluminium Blades with guard grill for short inlet

Ordering code: 0313-4-0442



Operating Point		Nominal data		Erp Data	
Air flow [m3/h]	4468	Phase [~]	1	Overall efficiency [%]	32.7
Static pressure [Pa]	73	Voltage [V]	230	Measurement cat.	A
Density [kg/m3]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	89	Frequency [Hz]	50	Efficiency grade N	42.5
Rotation speed [1/min]	893	Input power [W]	330	Variable speed drive	NO
Input power [W]	290	Input current [A]	1.50	Power input [kW]	0.28
Current [A]	1.33	Nominal speed [rpm]	845	Airflow [m3/h]	4468
Total efficiency [%]	38	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	76
Static efficiency [%]	31	Max. ambient temp. [°C]	70	Rotational Speed [rpm]	891
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	155		
Sound pressure [dB]	0	Capacitor [μF/450V]	6.30		
Weighted sound pressure [dB(A)]	0	K. Value	N / A		
		Connection	N / A		
		Weight [Kg]	16.0		

Static pressure

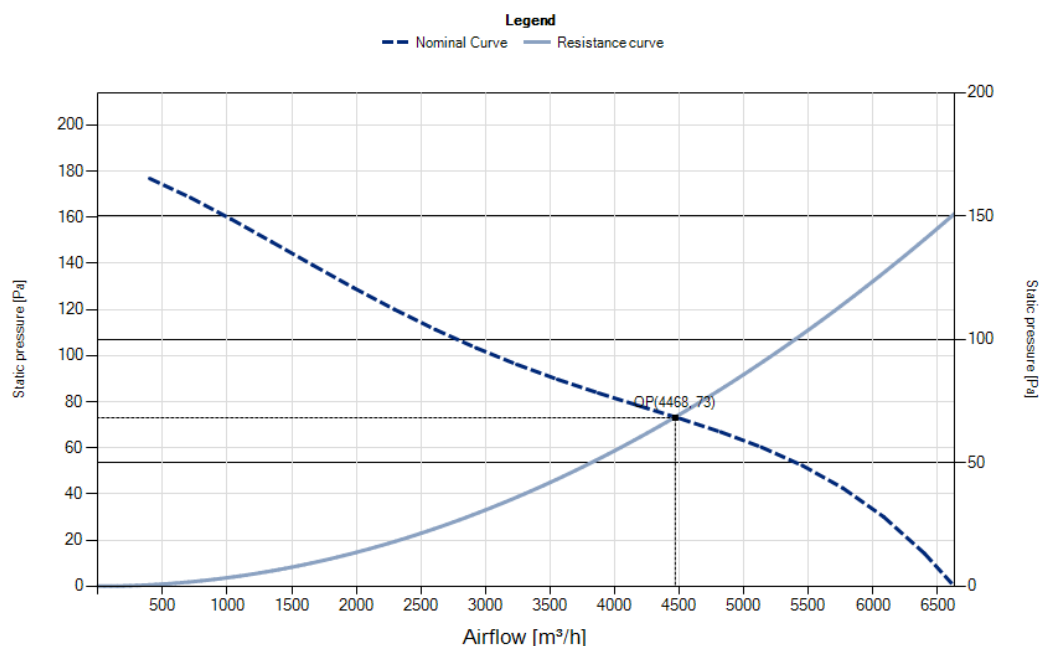


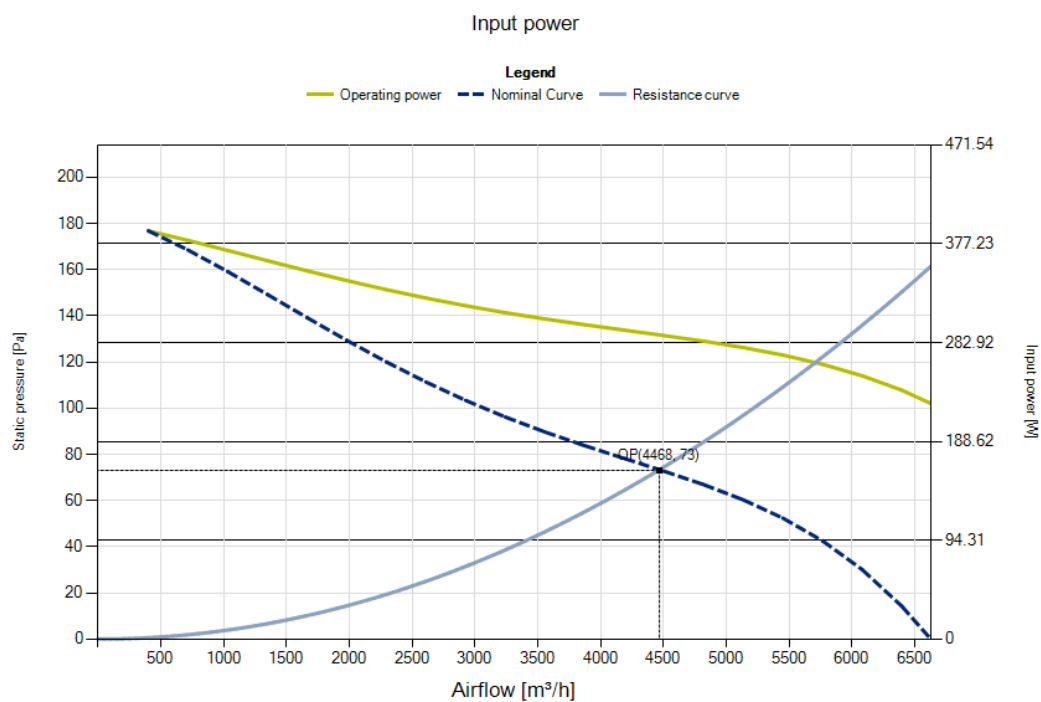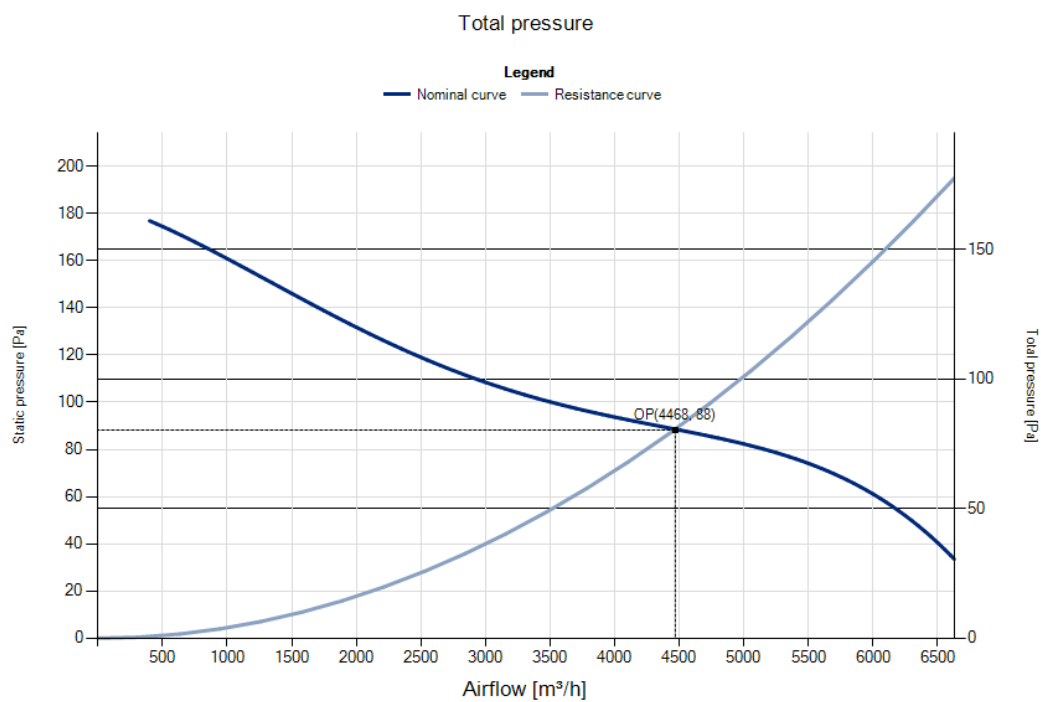

Hdria d.o.o., subsidiary Spodnja Idrija Spodnja Kanonjta 23, Slovenia, T: +386 5375 6000, E: sales.movent@hdria.com

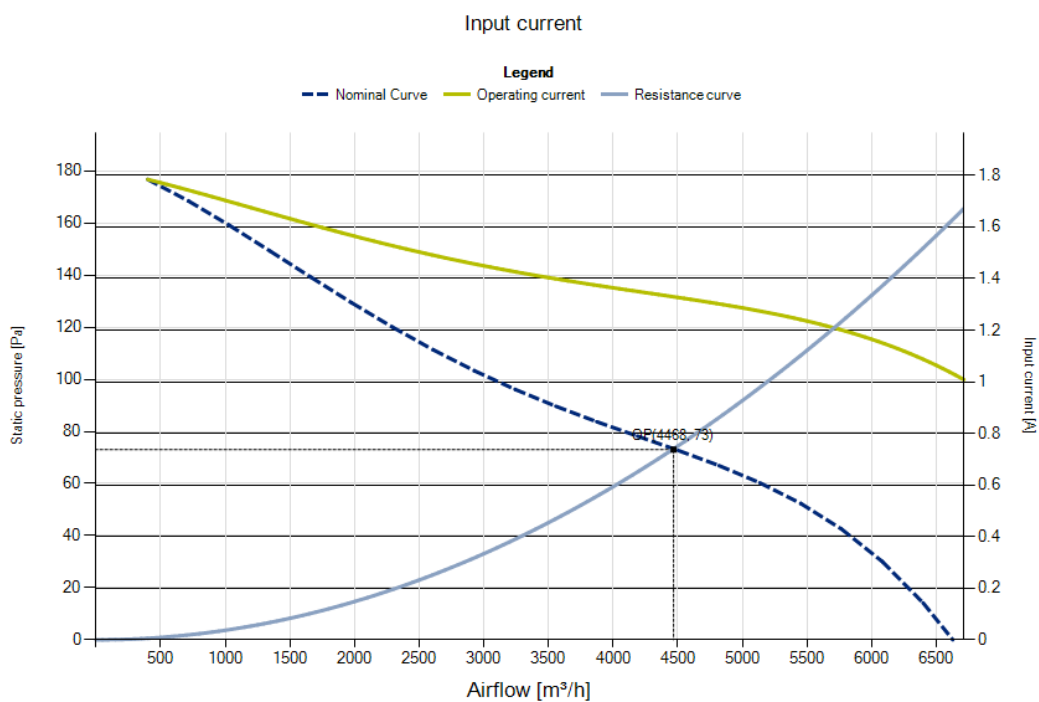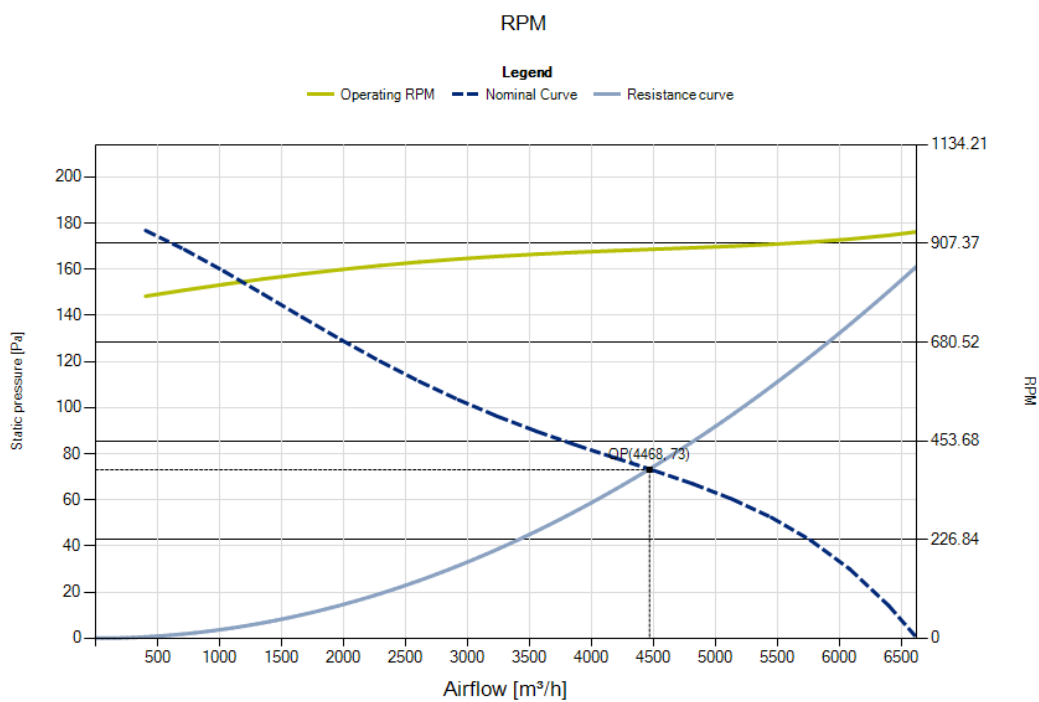

Specific fan power

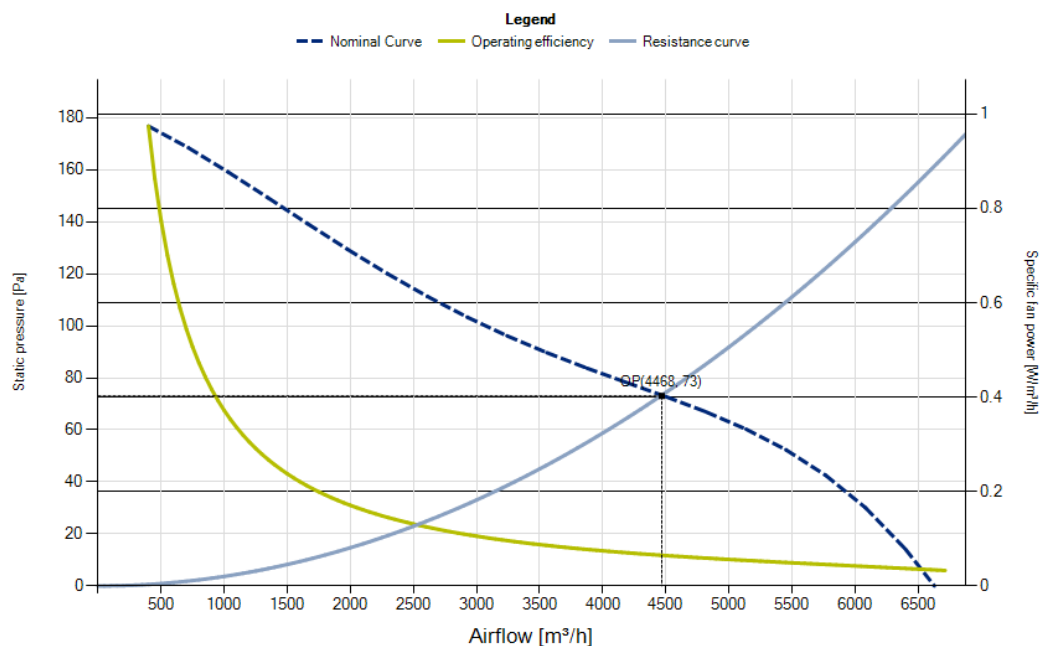

Overall static efficiency

