

#1 DATA SHEET


R14R-63APS-ES60B-01A04

EC Axial Fans with guard grill for short inlet


Ordering code: 0314-4-0047

Operating Point		Nominal data		Erp Data	
Air flow [m3/h]	8955	Phase [~]	1	Overall efficiency [%]	50.5
Static pressure [Pa]	118	Voltage [V]	230 / 230	Measurement cat.	A
Density [kg/m3]	1.2	Voltage range [V]	200-277	Efficiency category	static
Total pressure [Pa]	157	Frequency [Hz]	50 / 60	Efficiency grade N	57.9
Rotation speed [1/min]	993	Input power [W]	620 / 620	Variable speed drive	INTEGRATED
Input power [W]	662	Input current [A]	2.70 / 2.70	Power input [kW]	0.67
Current [A]	2.9	Nominal speed [rpm]	1000 / 1000	Airflow [m3/h]	8955
Total efficiency [%]	59	Min. ambient temp. [°C]	-25	Pressure drop [Pa]	128
Static efficiency [%]	44	Max. ambient temp. [°C]	60	Rotational Speed [rpm]	1008
Sound power [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power [dB(A)]	0	Insulation class	130		
Sound pressure [dB]	0	Capacitor [μF/450V]	0.00		
Weighted sound pressure [dB(A)]	0	K. Value	0		
		Connection	0 / 0		
		Weight [Kg]	14.4		


Static pressure

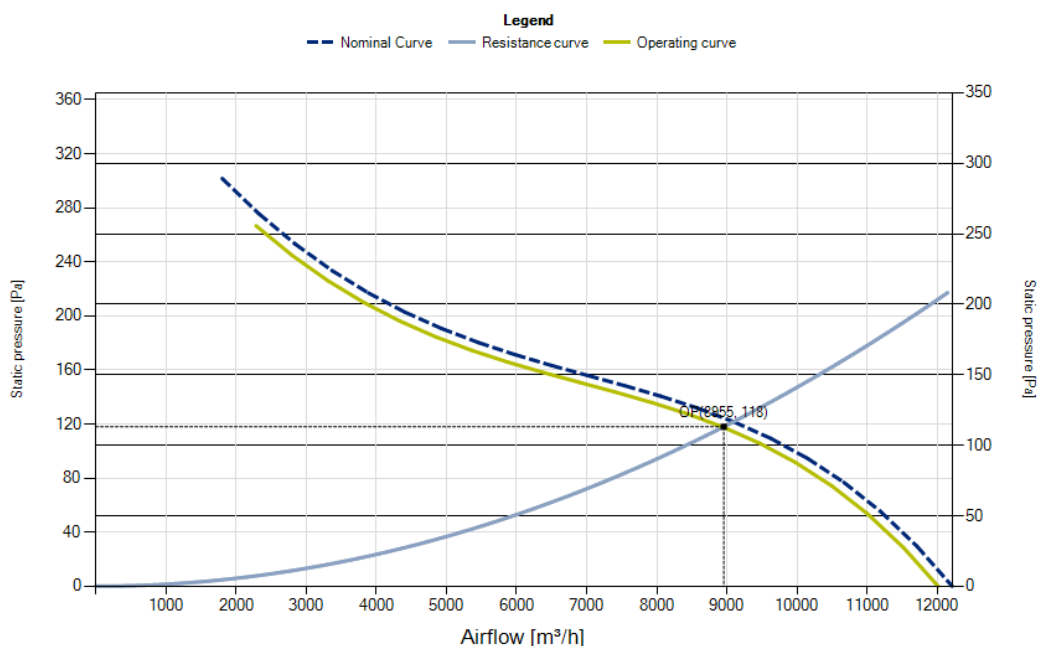



Total pressure

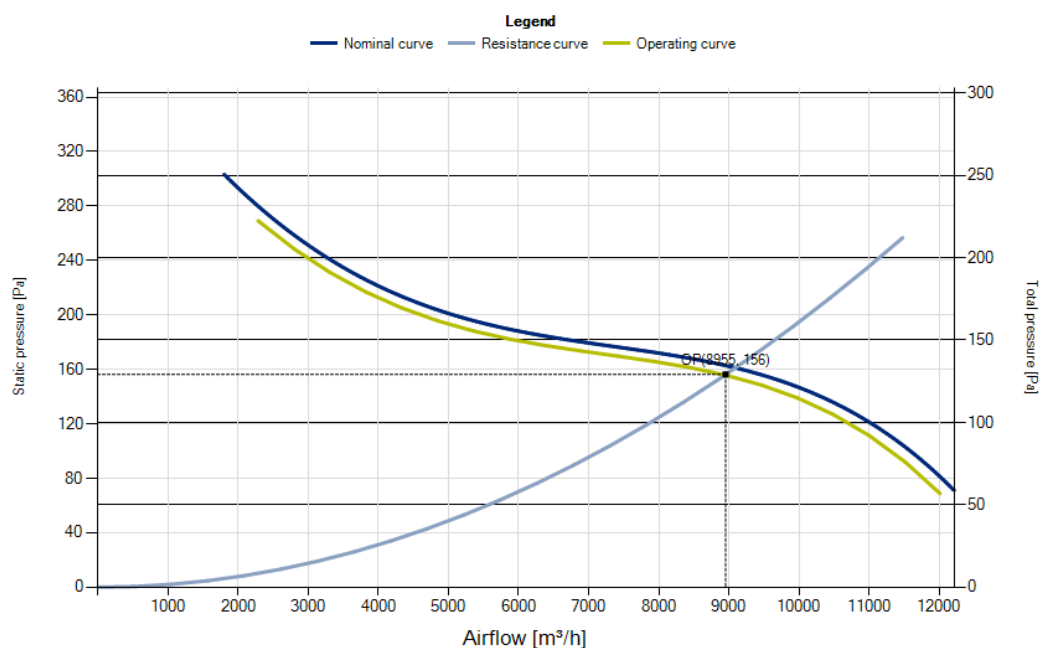


Input power

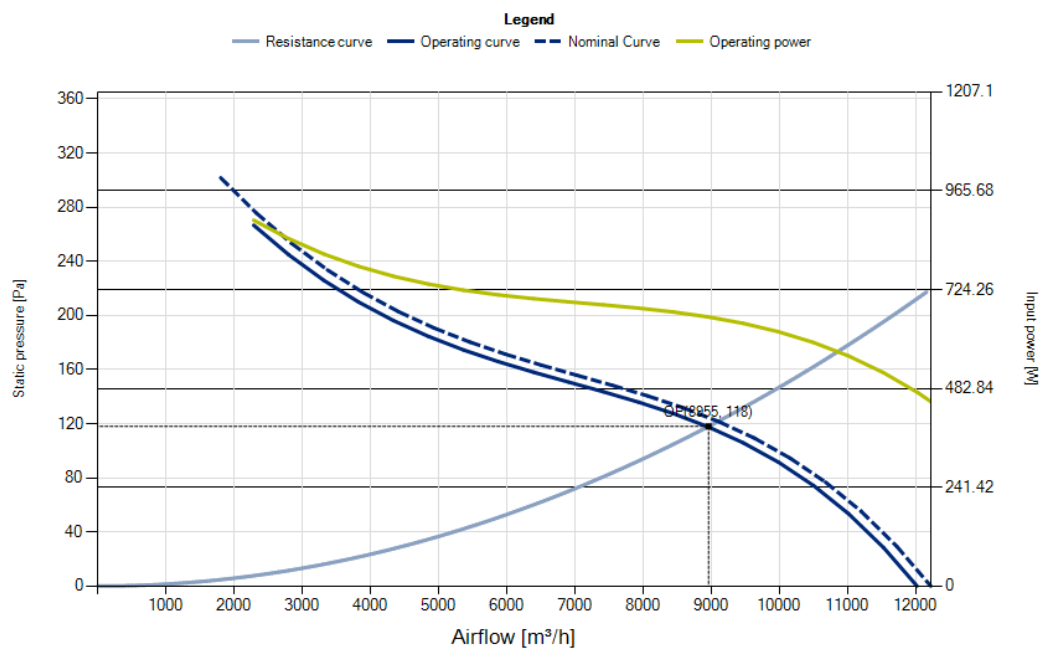


Hidria d.o.o., subsidiary Spodnja Idrija Spodnja Kanonjka 23, Slovenia, T: +386 5375 6000, E: sales.movent@hidria.com

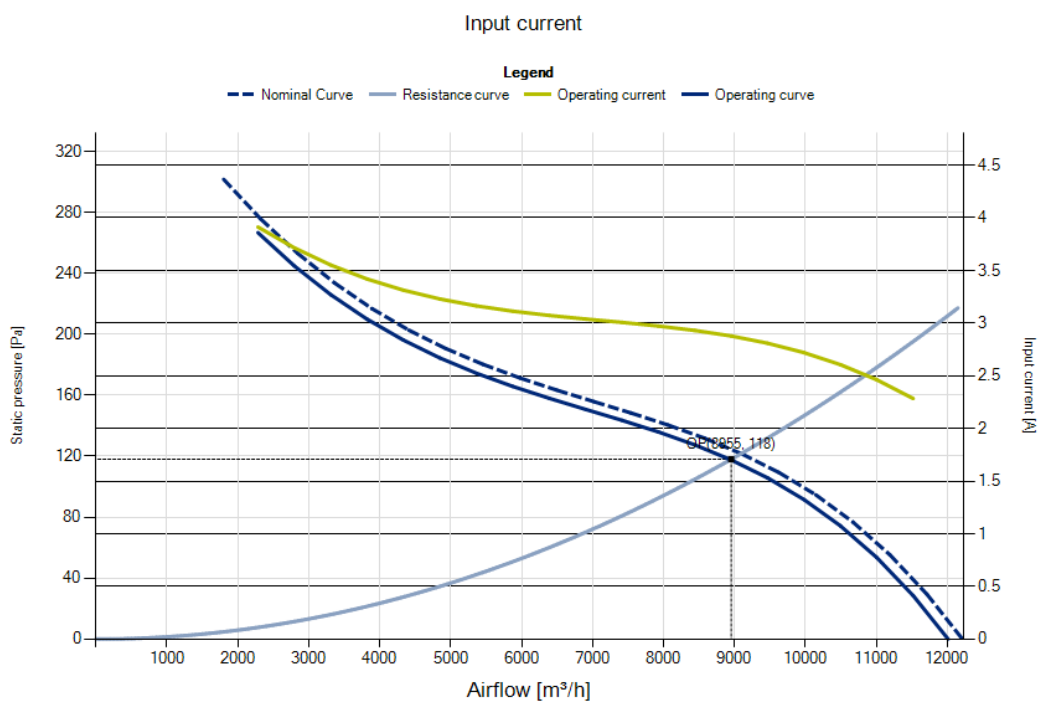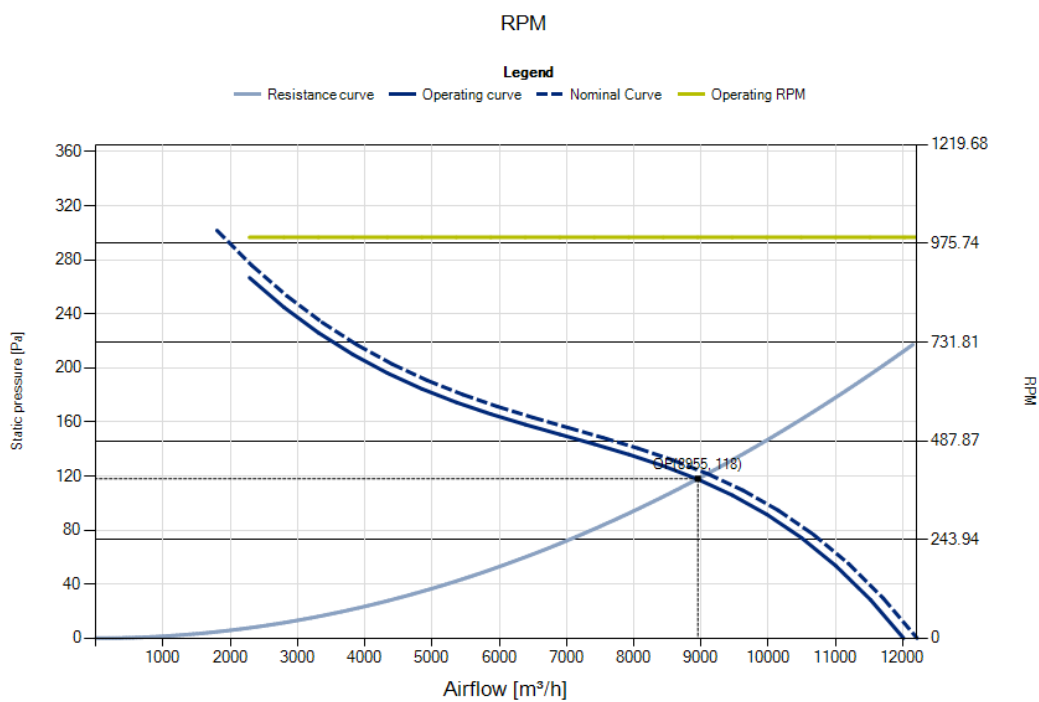

Specific fan power

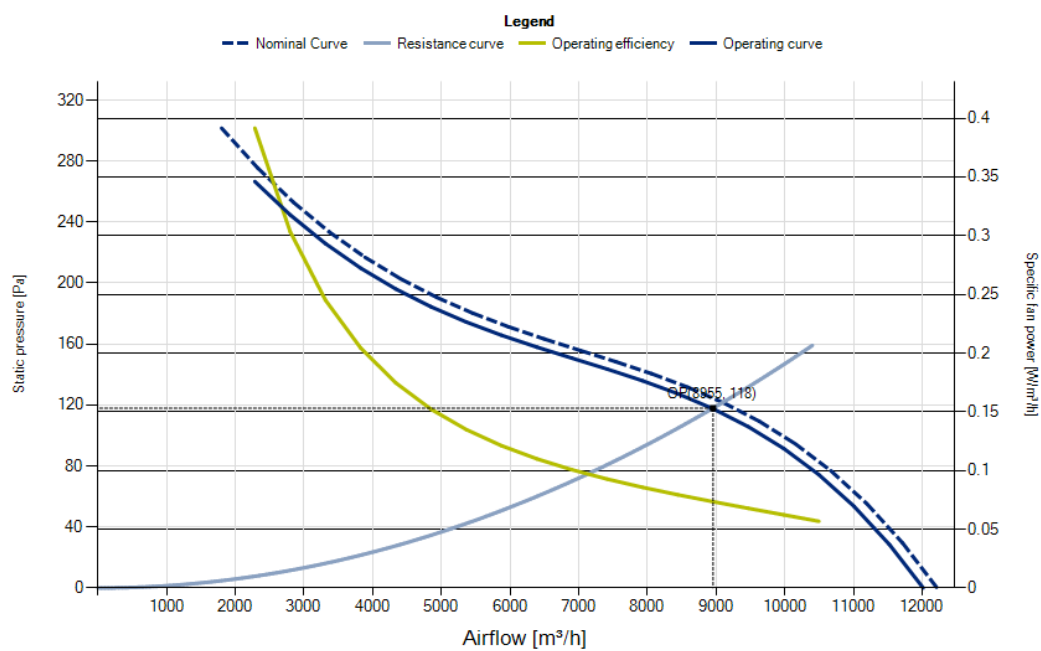

Overall static efficiency

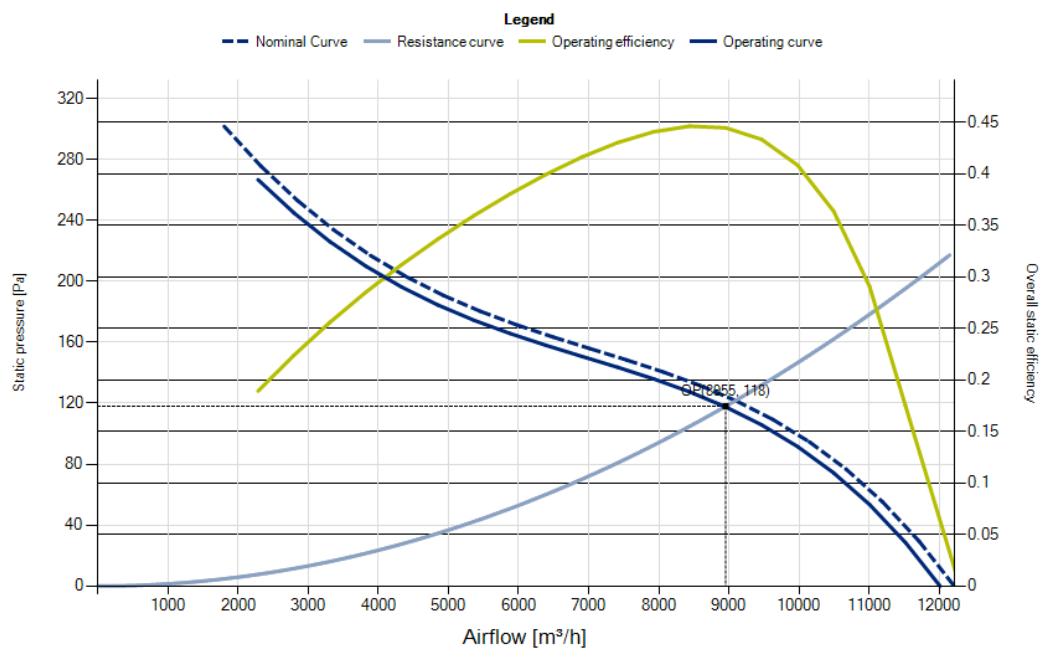

Static efficiency

