

Тип мотора	Электрические параметры	Охлаждение компрессора (в соответствии со спецификацией)	Вес [кг]	Размеры					
				Высота [мм]		Расположение патрубков/I.D. [мм]			Альтернативное расположение возможно
				А	В	Всасывание С	Сервисный D	Нагнетание E	
CSIR	187-254 V, 50 Hz	F2	28	259	254	16.0	6.2	6.2	
CSR	198-254 V, 50 Hz	F2	19.1	259	247	12.9	6.5	8.2	
CSR	198-254 V, 50 Hz	F2	20	259	247	12.9	6.5	8.2	
CSR	198-254 V, 50 Hz	F2	19.1	259	247	12.9	6.5	8.2	
RSCR/CSIR	198-254 V, 50/60 Hz	F1	4.3	137	135	6.2	6.2	5.0	X
RSIR/CSIR	187-254 V, 50/60 Hz	S	6.7	163	159	6.2	6.2	5.0	X
RSIR/CSIR	187-254 V, 50/60 Hz	S	6.8	163	159	6.2	6.2	5.0	X
RSIR/CSIR	187-254 V, 50/60 Hz	S	7.5	173	169	6.2	6.2	5.0	X
CSIR	198-254 V, 50/60 Hz	F2	7.5	173	169	6.2	6.2	5.0	
RSIR/CSIR	187-254 V, 50/60 Hz	S	7.5	173	169	6.2	6.2	5.0	X
RSIR/RSCR/CSIR	187-254 V, 50/60 Hz	S	8.3	173	169	6.2	6.2	5.0	X
RSCR/CSIR	187-254 V, 50/60 Hz	S	8.3	173	169	6.5	6.5	5.0	
RSIR/CSIR	187-254 V, 50/60 Hz	S	10	197	191	6.2	6.2	5.0	
RSIR/CSIR	187-254 V, 50/60 Hz	S	10.5	190	184	8.2	6.2	6.2	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.5	197	191	8.2	6.2	6.2	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.5	197	191	8.2	6.2	6.2	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.5	203	197	8.2	6.2	6.2	X
CSIR	198-242 V, 50/60 Hz	F1	10.4	203	197	8.2	6.5	6.5	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.6	196	191	8.2	6.2	6.2	
CSIR	198-254 V, 50/60 Hz	F2	10.6	196	191	8.2	6.2	8.2	
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.6	196	191	8.2	6.2	6.2	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.6	196	191	8.2	6.2	6.2	
RSIR/CSIR	187-254 V, 50/60 Hz	F1	10.6	196	191	8.2	6.2	6.2	X
RSIR/CSIR	187-254 V, 50/60 Hz	F1	12.6	209	203	8.2	6.2	6.2	
RSIR/CSIR	187-254 V, 50/60 Hz	F2	13.1	209	203	10.2	6.2	6.2	X
CSIR	187-254 V, 50/60 Hz	F2	13.7	219	213	10.2	6.2	6.2	X
CSIR/CSR	187-254 V, 50/60 Hz	F2	13.8	219	213	10.2	6.2	6.2	
RSIR/CSIR	187-254 V, 50/60 Hz	F2	12.1	199	193	8.2	6.2	6.2	
CSIR	198-254 V, 50/60 Hz	F2	12.2	209	203	10.2	6.2	8.2	
RSIR/CSIR	187-254 V, 50/60 Hz	F2	12.6	209	203	8.2	6.2	6.2	X
CSIR	198-254 V, 50/60 Hz	F2	12.95	209	203	10.2	6.2	8.2	
CSIR	187-254 V, 50/60 Hz	F2	13.1	209	203	10.2	6.2	6.2	X
CSIR	198-254 V, 50/60 Hz	F2	13.5	209	203	10.2	6.2	8.2	X
CSIR	187-254 V, 50/60 Hz	F2	13.7	219	213	10.2	6.2	6.2	X
CSR	198-254 V, 50/60 Hz	F2	13.7	219	213	10.2	6.2	8.2	
CSR	187-254 V, 50/60 Hz	F2	13.5	219	213	10.2	6.2	6.2	X

Technical drawing of the PL / PLE series pressure washer, showing three views: front, side, and top. The drawing includes the following dimensions and callouts:

- Front View:**
 - Overall width: 204
 - Internal width: 170
 - Height: 100
 - Mounting hole diameter: $\varnothing 16$ (D)
 - Internal hole diameter: $\varnothing 9$ (E)
 - Internal dimensions: 35, 70
- Side View:**
 - Overall length: 206
 - Height: 130
 - Mounting points: B1, B2, C, D, E
- Top View:**
 - Overall width: 127
 - Overall height: 130
 - Mounting hole diameter: $\varnothing 16$ (D)
 - Internal hole diameter: $\varnothing 9$ (E)
 - Internal dimensions: 46, 59

Примечание:
На TL компрессорах сервисный и всасывающий патрубки взаимозаменяемы.

Technical drawing of the TL compressor showing three views: front, side, and top. The front view shows a cylindrical body with a service port on the left and a suction port on the right. Dimensions include diameters of 9 and 16 mm, and various heights and widths. The side view shows the compressor's profile with dimensions for height, width, and angles. The top view shows the base with dimensions for width, depth, and angles. A reference number 8244 is shown in the top right corner.

Technical drawing of the NL / NLE (NLY similar) container, showing three views: top, front, and side.

Top View:

- Overall width: 204
- Overall height: 170
- Internal width: 178
- Internal height: 100
- Mounting hole diameter: $\varnothing 16$

Front View:

- Overall width: 205
- Overall height: 254
- Mounting hole diameter: $\varnothing 16$
- Angles: 25° , 35° , 41°
- Dimensions: 93.5, 102.5, 75.5

Side View:

- Overall height: 166
- Overall width: 113
- Internal width: 119
- Internal height: 127
- Mounting hole diameter: $\varnothing 16$
- Angles: 51° , 27° , 47°
- Dimensions: 60.5, 72, 54, 78

Technical drawing of the NF 8595 bathtub, showing three views: top, side, and front.

Top View Dimensions:

- Overall width: 204 mm
- Inner width: 170 mm
- Overall depth: 132 mm
- Inner depth: 101.6 mm
- Mounting hole spacing: 70 mm and 35 mm
- Mounting hole diameters: $\varnothing 19$, $\varnothing 16$, and $\varnothing 9.7$
- Bottom width: 165 mm
- Bottom depth: 186 mm


Side View Dimensions:

- Overall width: 205 mm
- Overall depth: 252 mm
- Height from base to top edge: 102.5 mm
- Height from base to bottom edge: 75.5 mm
- Angle of bottom edge: 35°
- Angle of top edge: 35°
- Angle of side panel: 15°


Front View Dimensions:

- Overall width: 166 mm
- Overall height: 72 mm
- Mounting hole spacing: 59.5 mm
- Angle of side panel: 51°
- Angle of bottom edge: 27°
- Angle of top edge: 47°
- Bottom width: 113 mm
- Bottom depth: 119 mm
- Bottom width (inner): 127 mm
- Height from base to top edge: 54 mm
- Height from base to bottom edge: 78 mm


FR

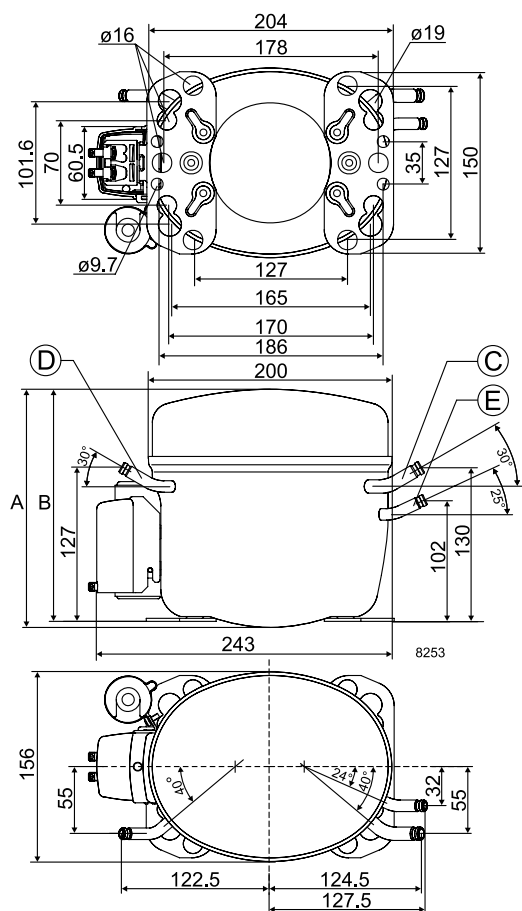

GS

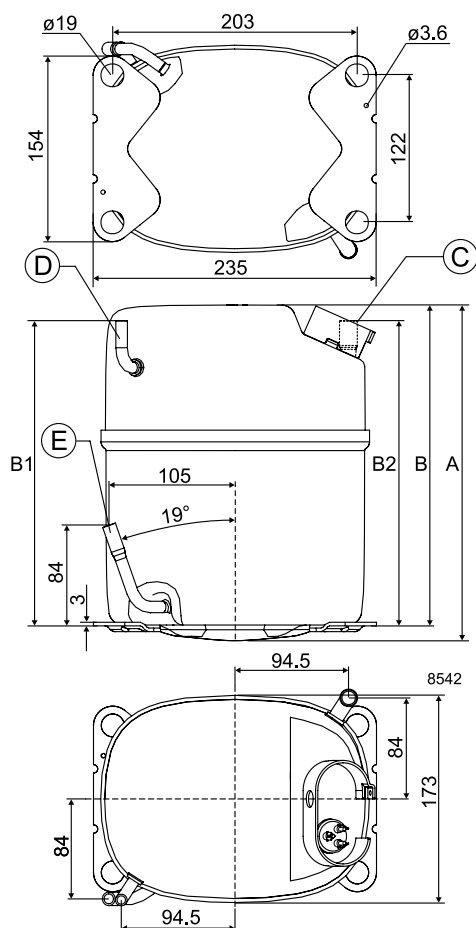

SC

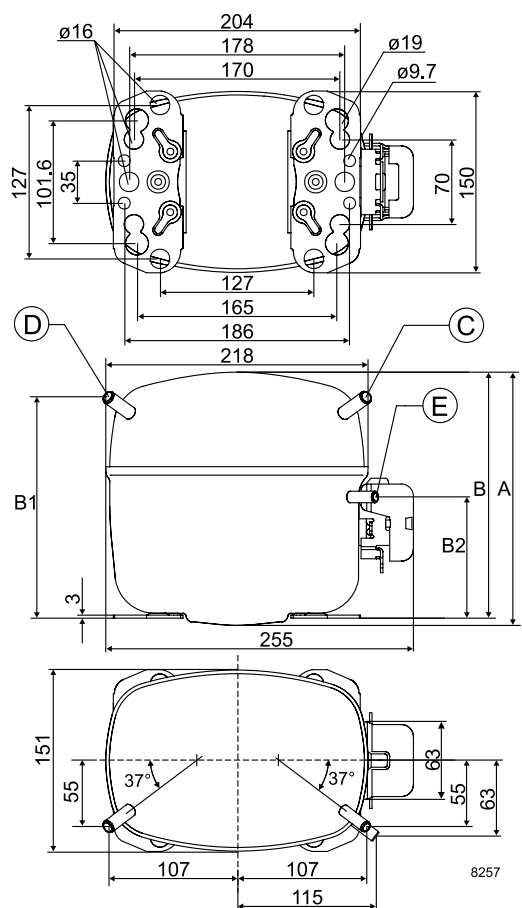

SC-Twin

