

AC Axial Fan


Product Characteristic

- Material : Cold rolled steel
- Protection Class: IP54
- Approvals: CCC/CE/ETL
- Insulation Class: F


400S-5



Product Drawing

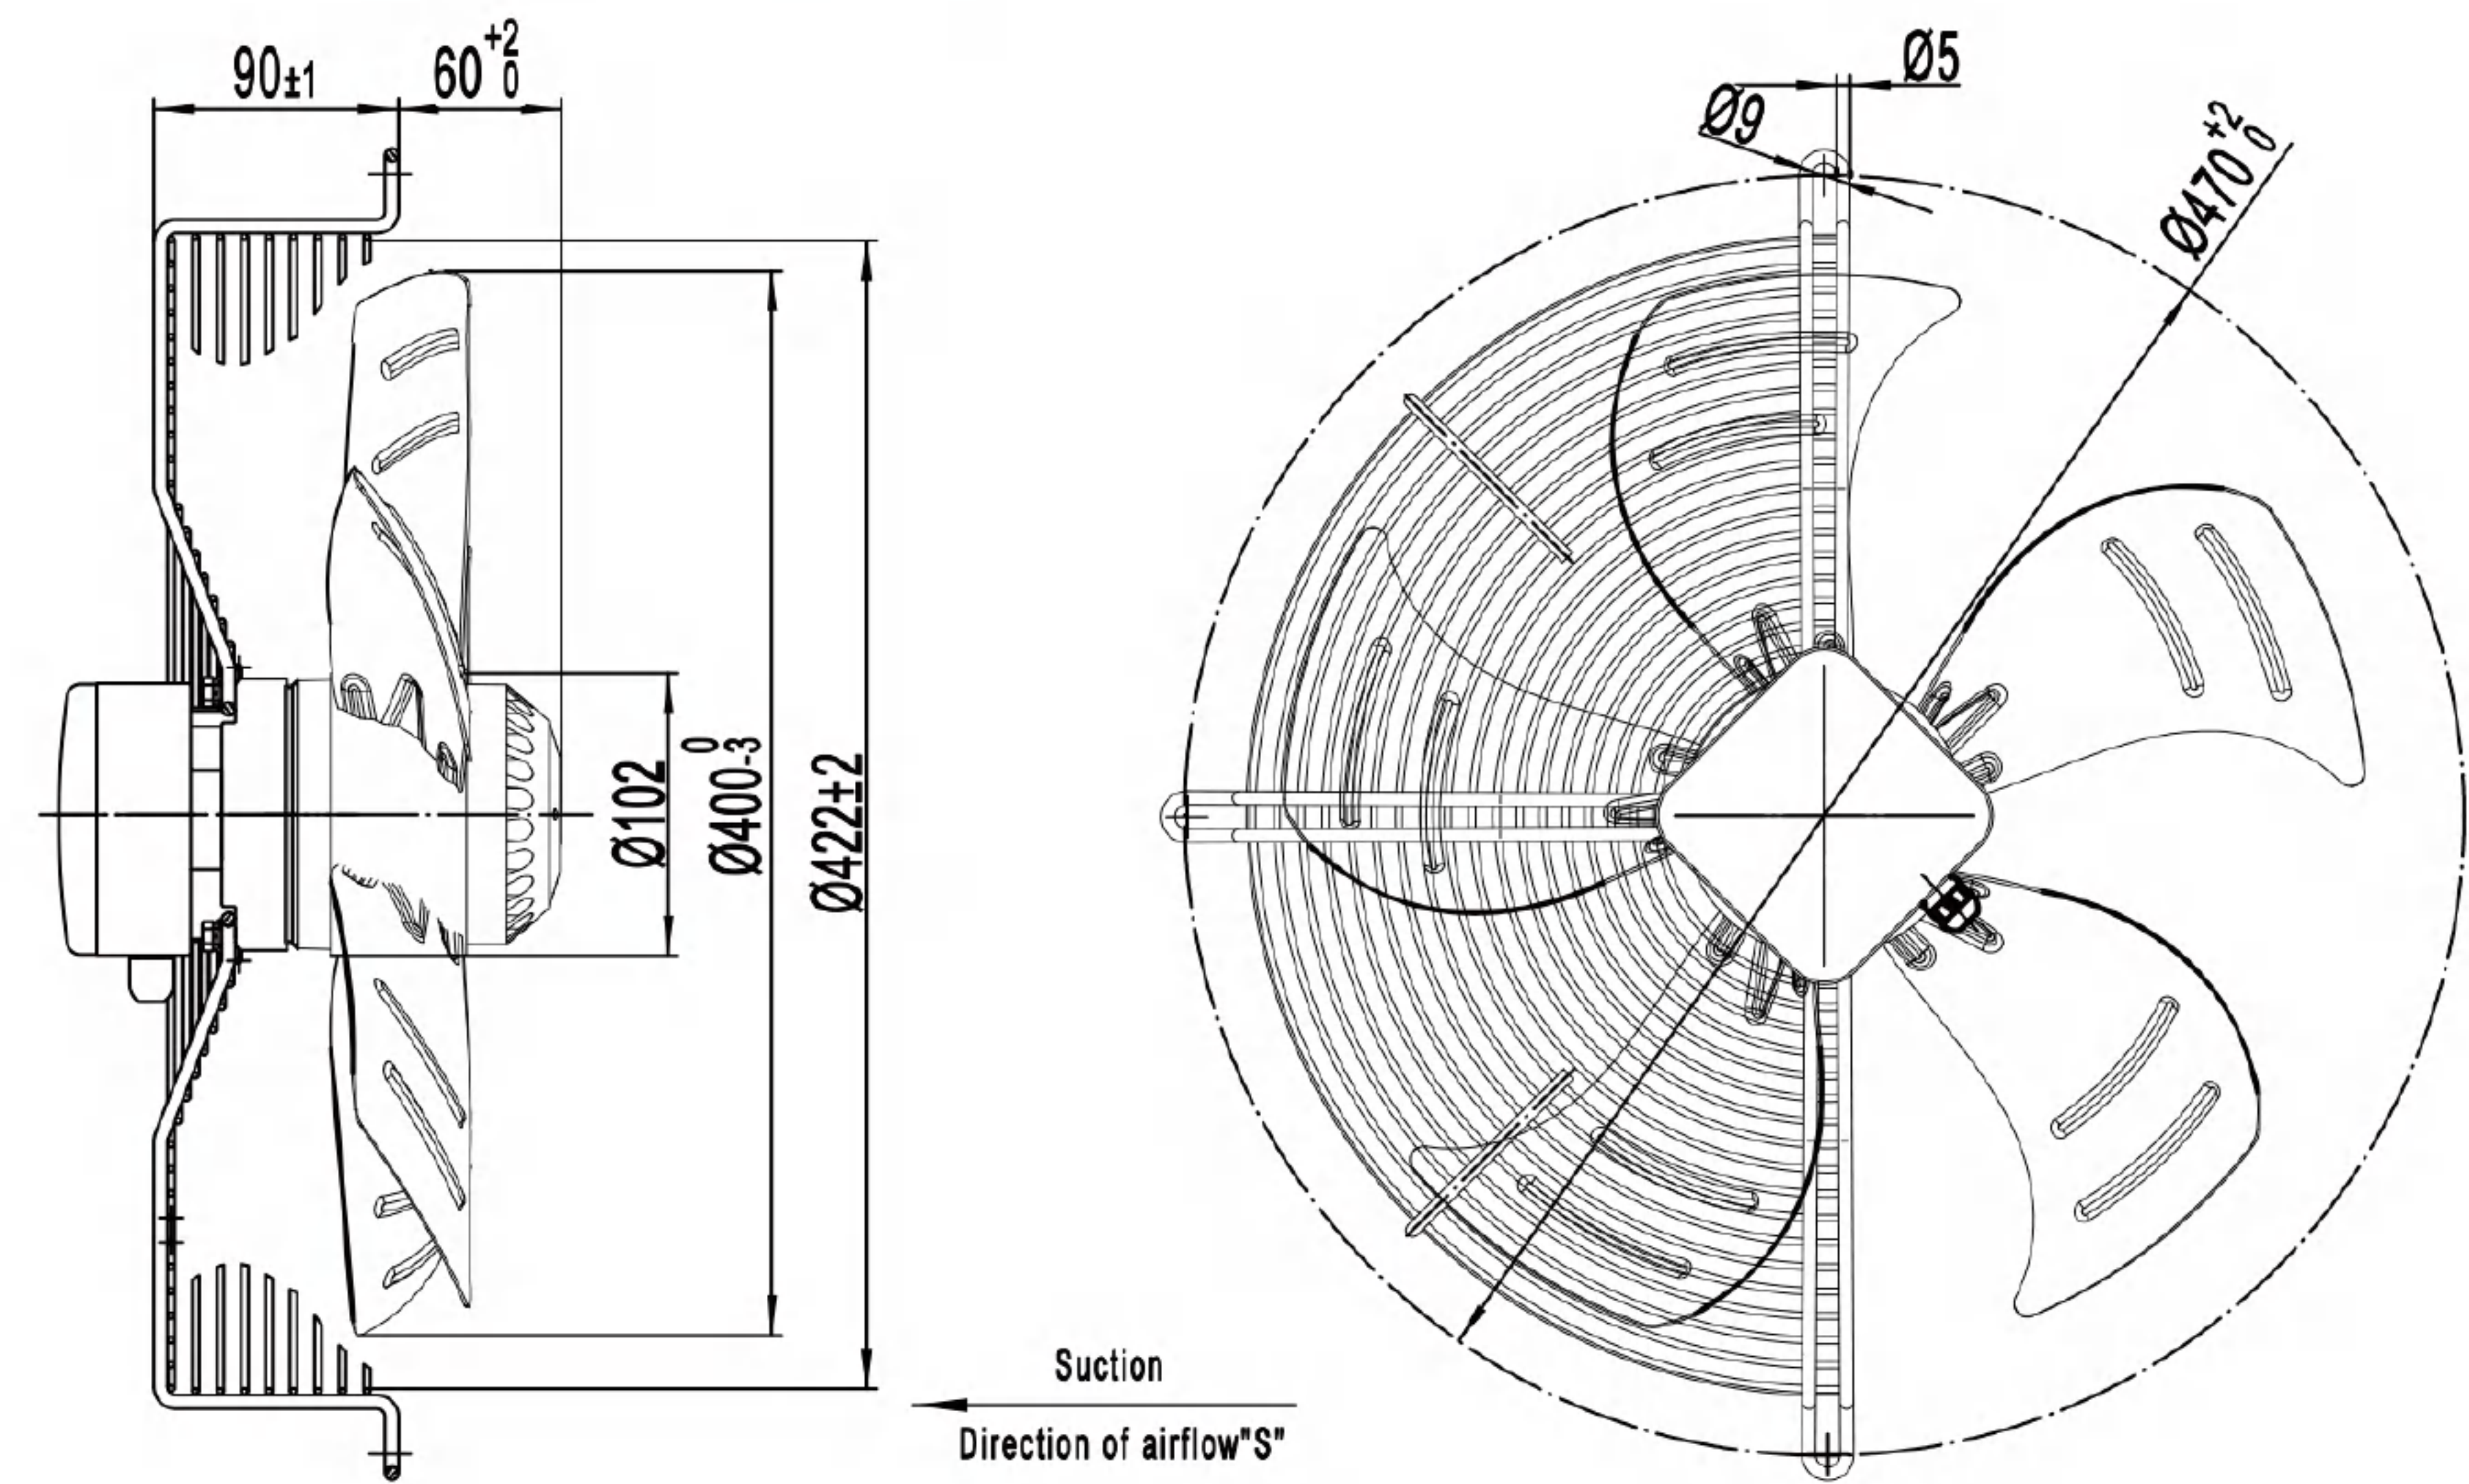

Flow Rate Curve

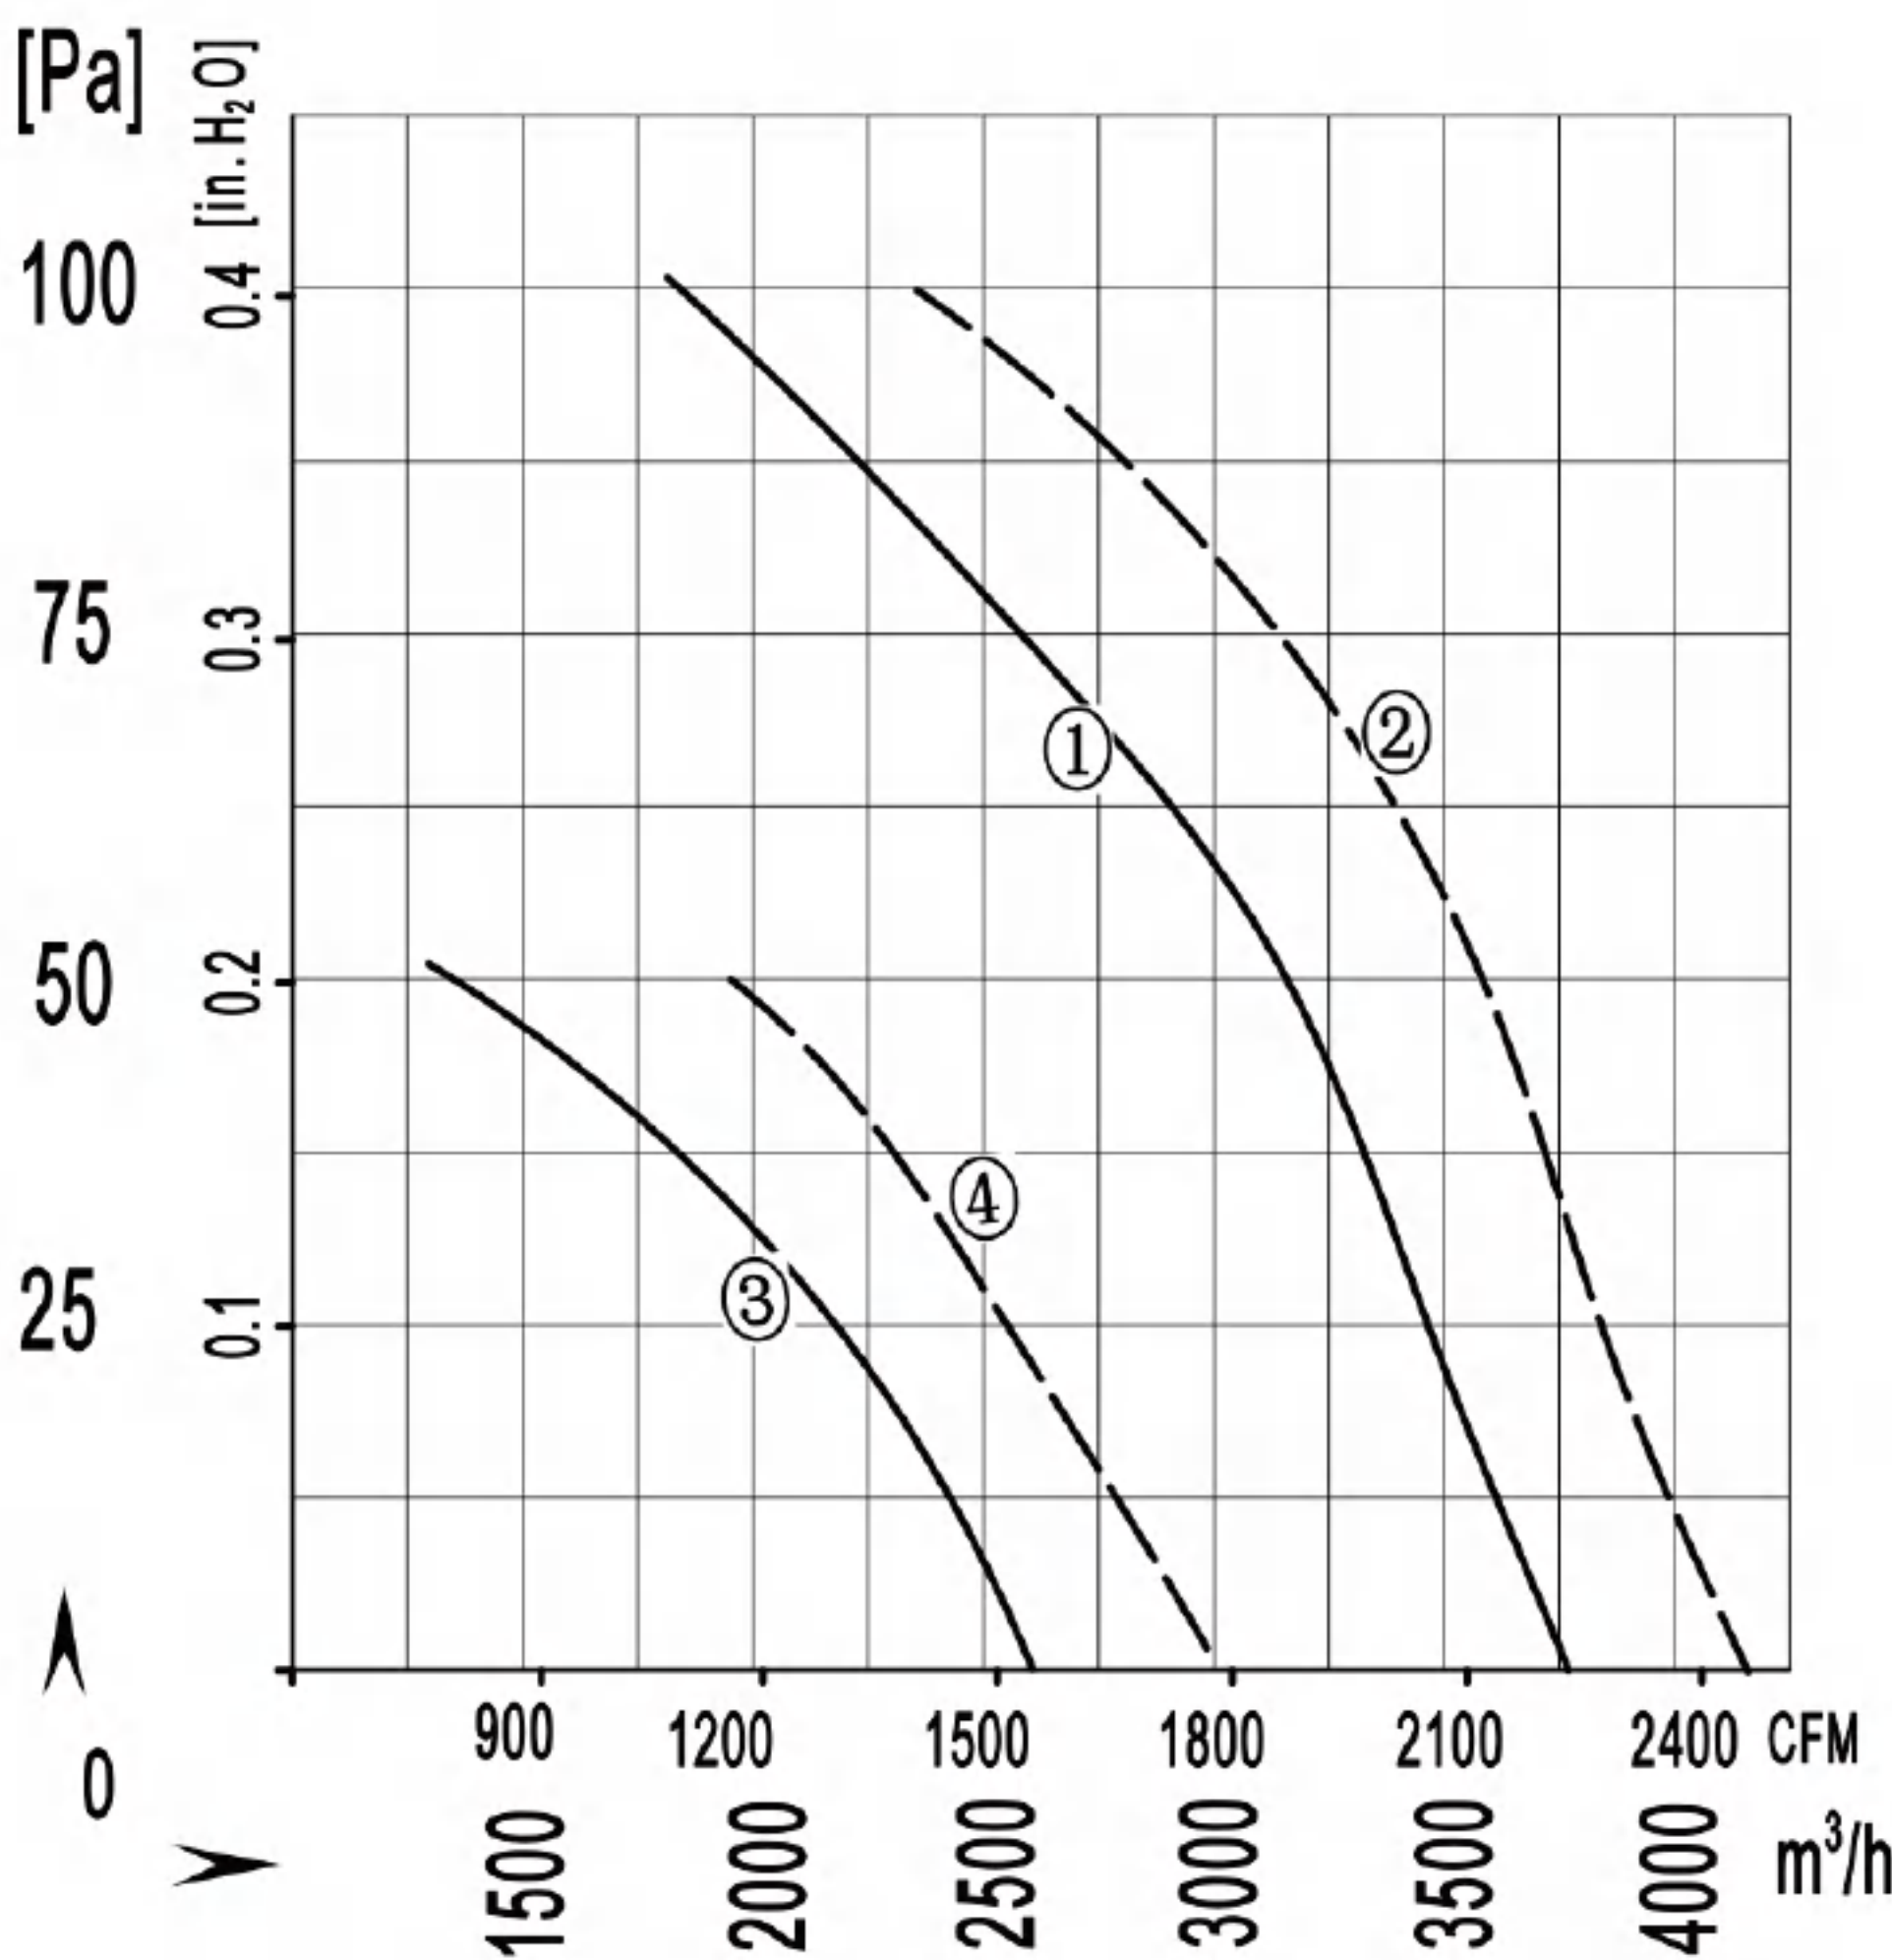

Technical Specifications

| Model             | Voltage  | Frequency | Current | Input Power | Speed   | Capacitor | Speed    | Noise   | Curve |
|-------------------|----------|-----------|---------|-------------|---------|-----------|----------|---------|-------|
| LWAA4E400S-5DM-01 | 220/230V | 50Hz      | 0.90A   | 180W        | 1350RPM | 6µ F      | 3700m³/h | 60dB(A) | ①     |
| LWAA4E400S-5DM-02 |          | 60Hz      | 1.22A   | 260W        | 1580RPM |           | 4100m³/h | 62dB(A) | ②     |
| LWAA4D400S-5DM-03 | 380/400V | 50Hz      | 0.50A   | 180W        | 1370RPM | /         | 3700m³/h | 60dB(A) | ①     |
| LWAA4D400S-5DM-04 |          | 60Hz      | 0.47A   | 240W        | 1620RPM |           | 4100m³/h | 62dB(A) | ②     |
| LWAA6E400S-5DM-05 | 220/230V | 50Hz      | 0.50A   | 100W        | 950RPM  | 4µ F      | 2600m³/h | 49dB(A) | ③     |
| LWAA6E400S-5DM-06 |          | 60Hz      | 0.54A   | 120W        | 1100RPM |           | 3000m³/h | 52dB(A) | ④     |
| LWAA6D400S-5DM-07 | 380/400V | 50Hz      | 0.31A   | 100W        | 930RPM  | /         | 2600m³/h | 49dB(A) | ③     |
| LWAA6D400S-5DM-08 |          | 60Hz      | 0.31A   | 120W        | 1100RPM |           | 3000m³/h | 52dB(A) | ④     |

# AC Axial Fan


## Product Characteristic

- Material : Cold rolled steel
- Protection Class: IP54
- Approvals: CCC/CE/ETL
- Insulation Class: F


400S-5



## Product Drawing

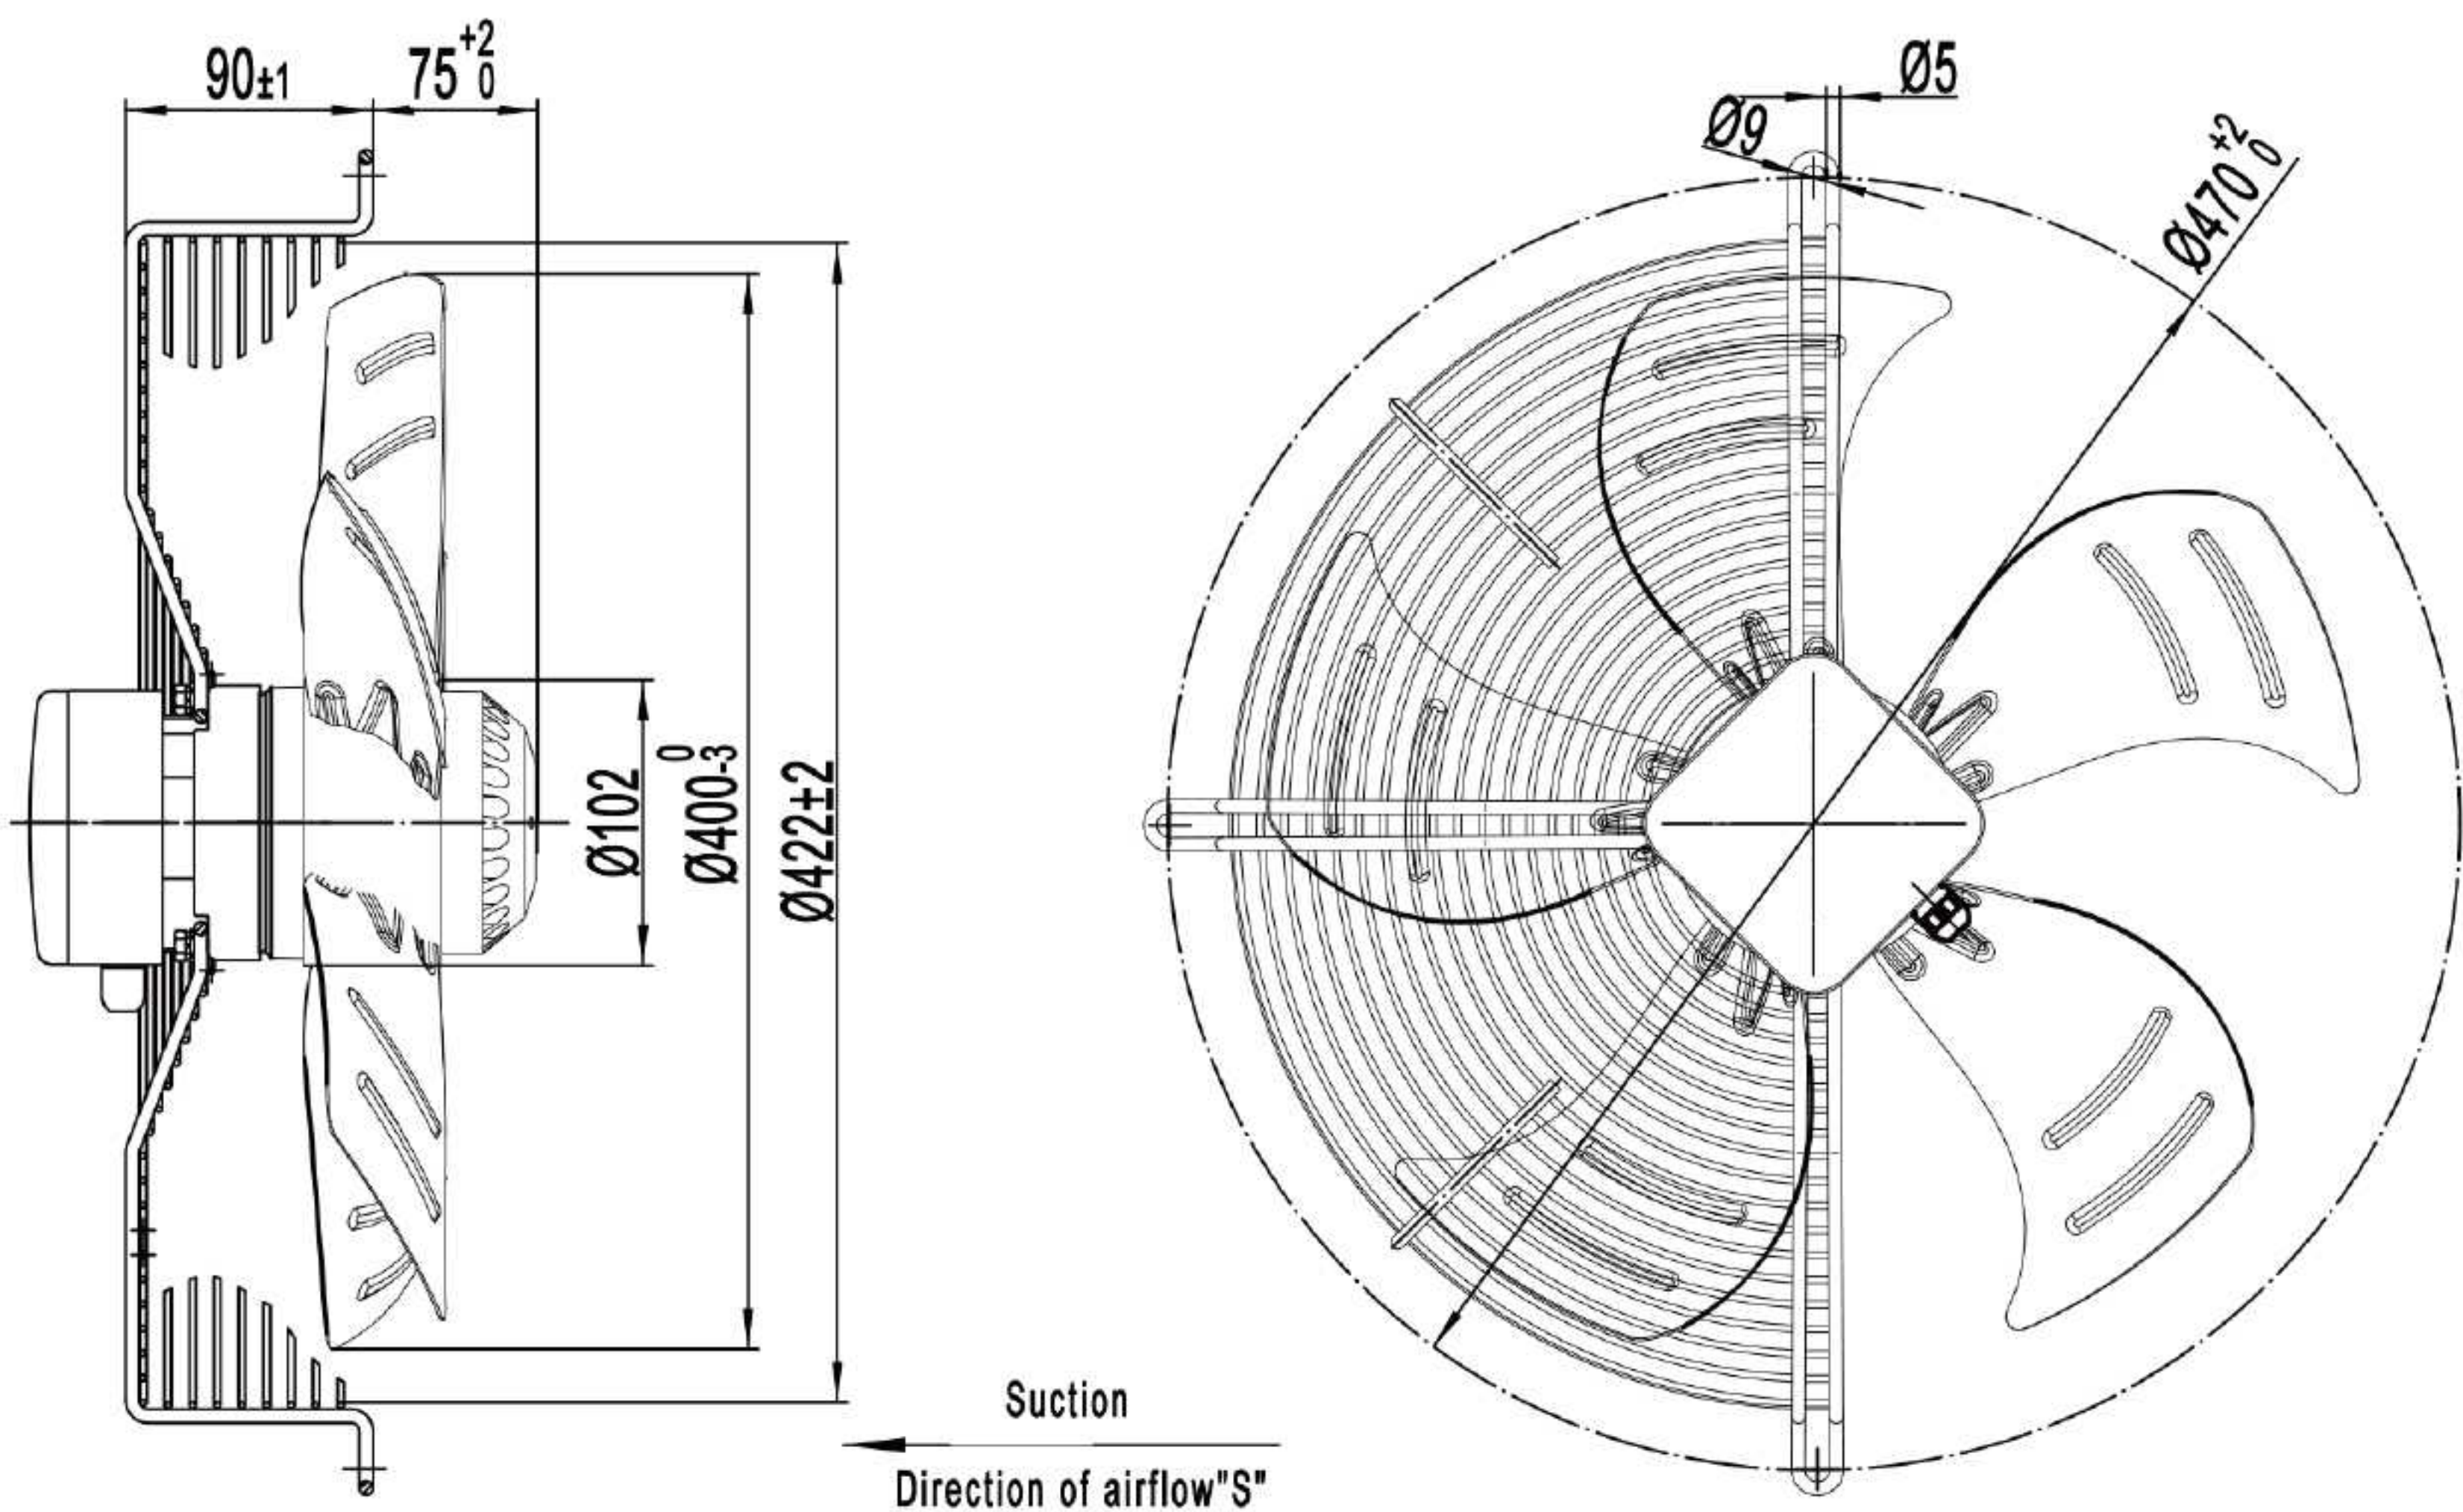

## Flow Rate Curve

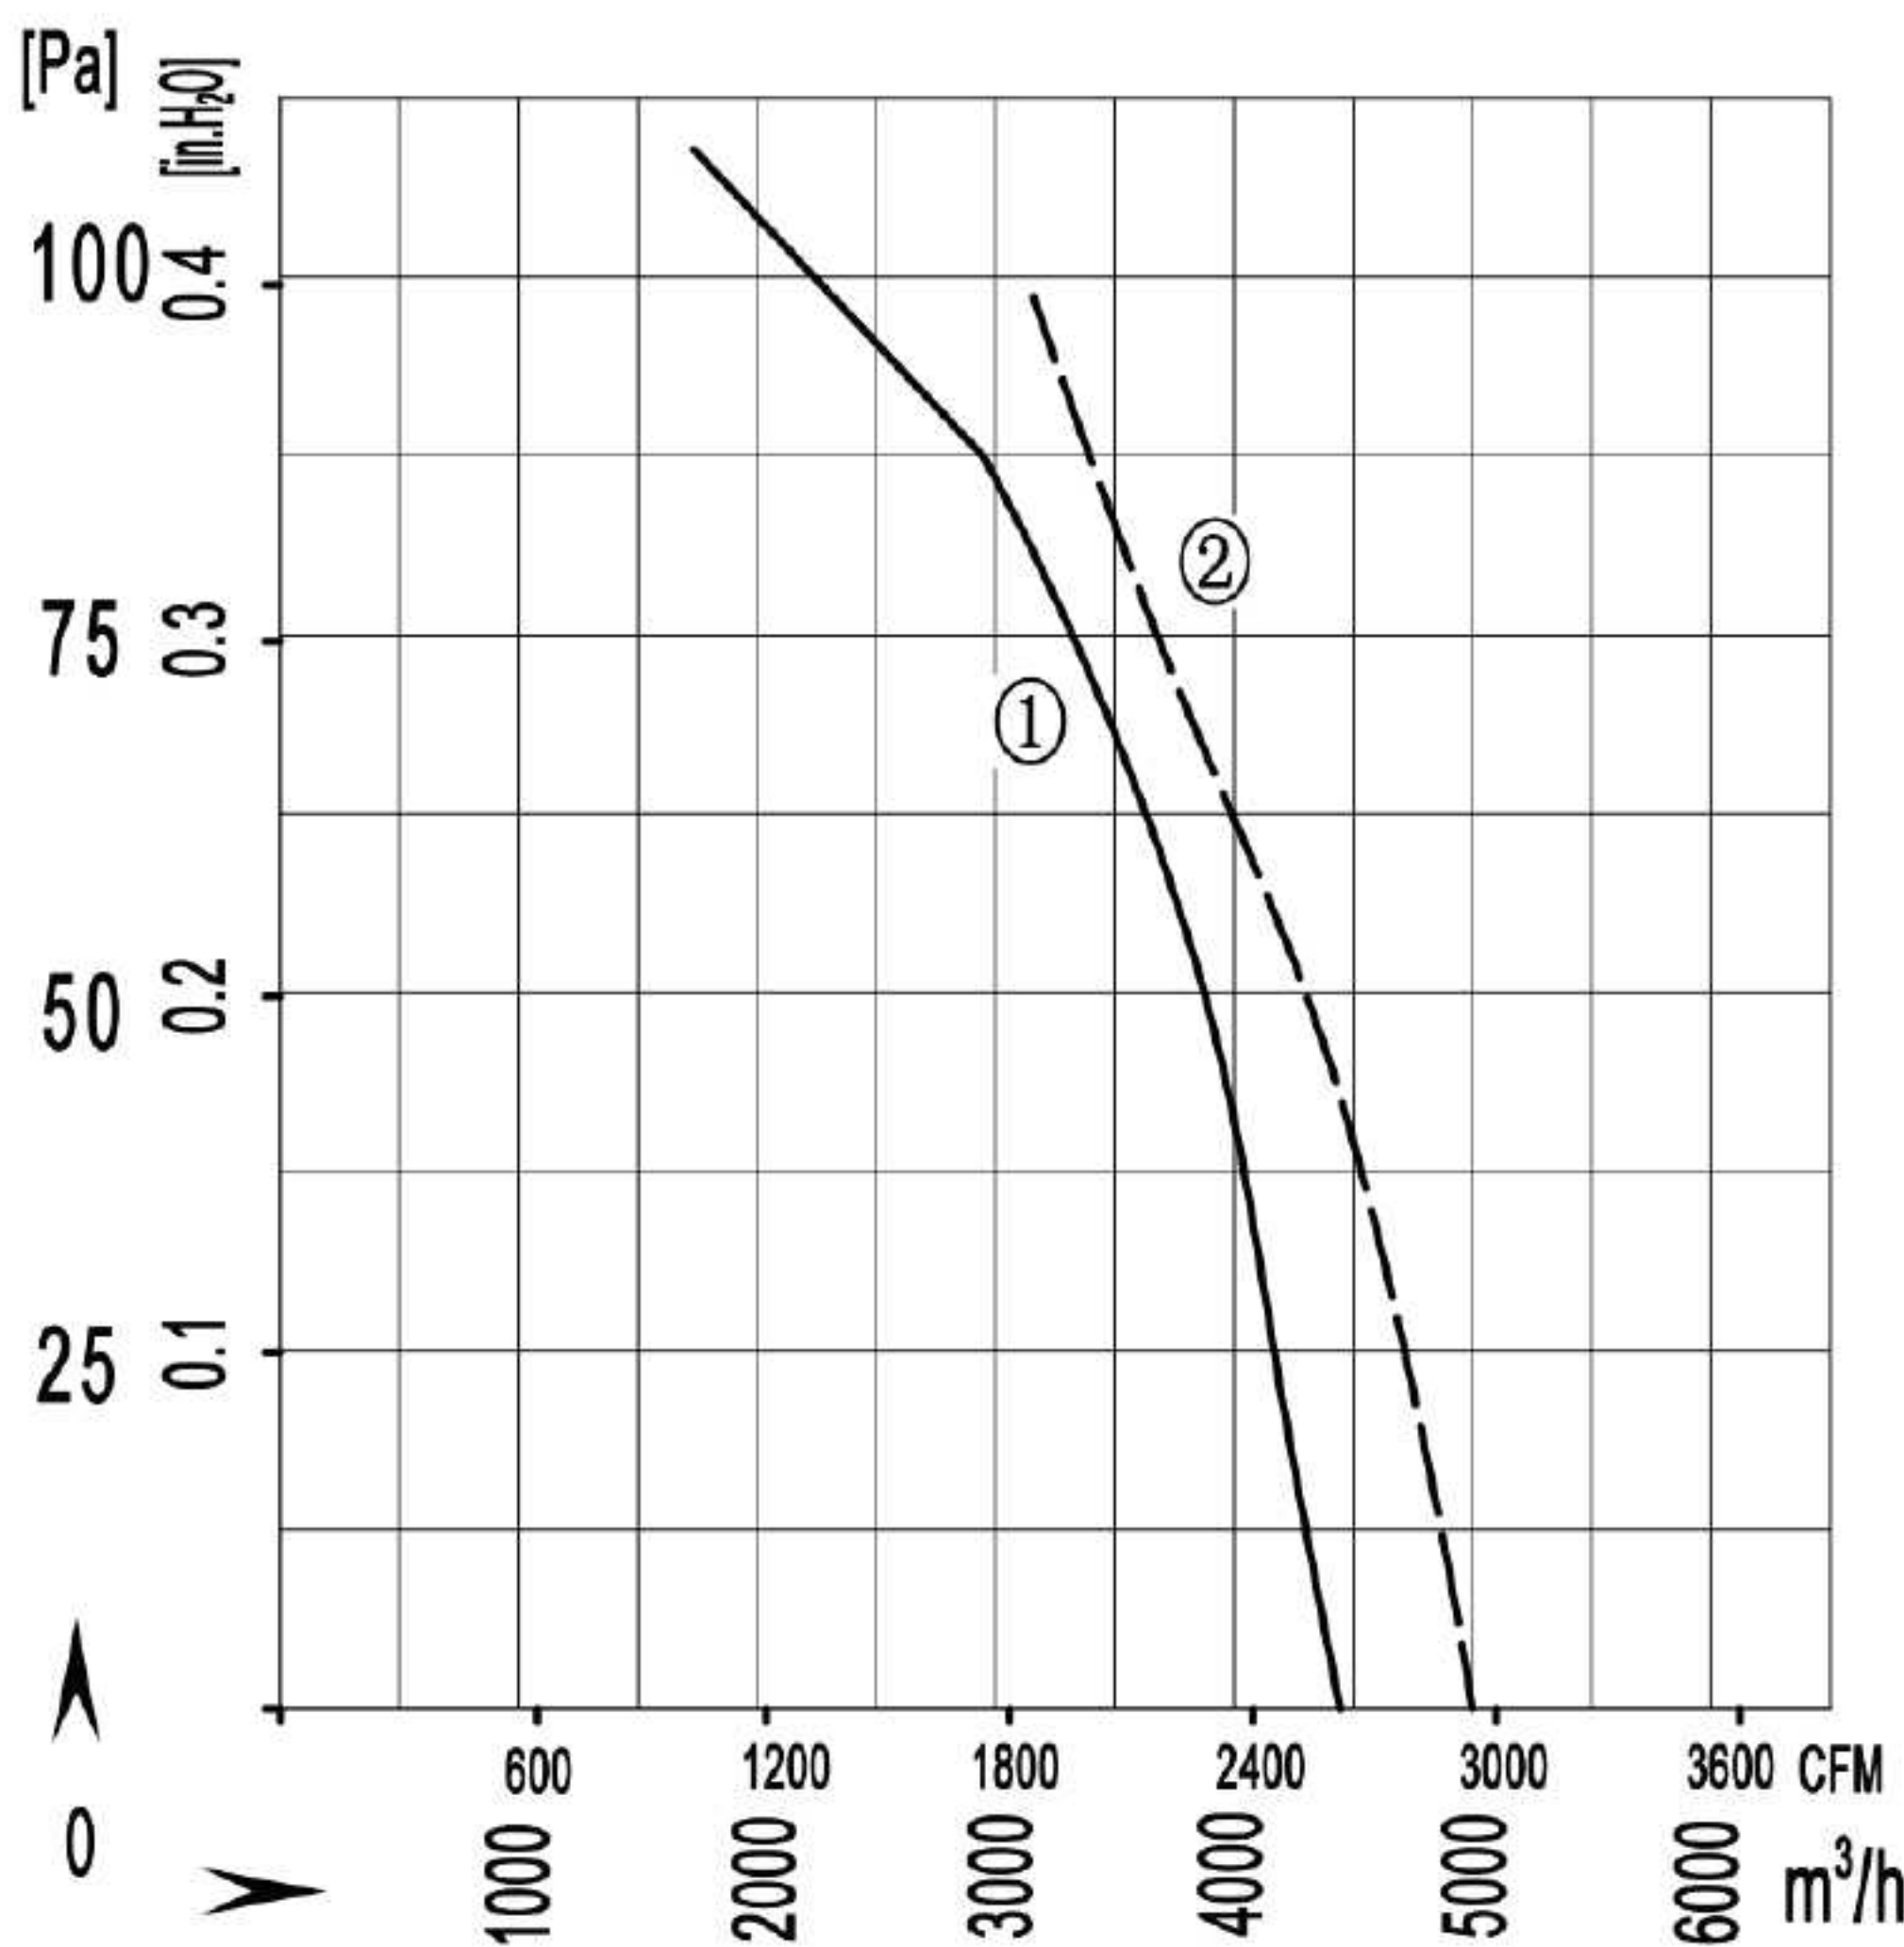

## Technical Specifications

| Model             | Voltage  | Frequency | Current | Input Power | Speed   | Capacitor | Speed    | Noise   | Curve |
|-------------------|----------|-----------|---------|-------------|---------|-----------|----------|---------|-------|
| LWAA4E400S-5DM-09 | 220/230V | 50Hz      | 1.10A   | 230W        | 1350RPM | 7μ F      | 4400m³/h | 62dB(A) | ①     |
| LWAA4E400S-5DM-10 |          | 60Hz      | 1.20A   | 280W        | 1600RPM |           | 5000m³/h | 64dB(A) | ②     |
| LWAA4D400S-5DM-11 | 380/400V | 50Hz      | 0.50A   | 230W        | 1350RPM | /         | 4400m³/h | 62dB(A) | ①     |
| LWAA4D400S-5DM-12 |          | 60Hz      | 0.60A   | 280W        | 1600RPM |           | 5000m³/h | 64dB(A) | ②     |