


LWAE-350 Series

Product Characteristic


- Material: Sheet steel
 - Type of protection: IP54
 - Insulation class: B
 - Approvals: CCC CE
 - Motor type: BLEC motor
 - Perm. amb.temp.: -25 C ~+60 C
 - Techniacal Feature: Control input 0-10VDC/PWM,Tech output, Locked-Rotor protection,Reverse Polarity Over-voltage protection Soft Start Protection.

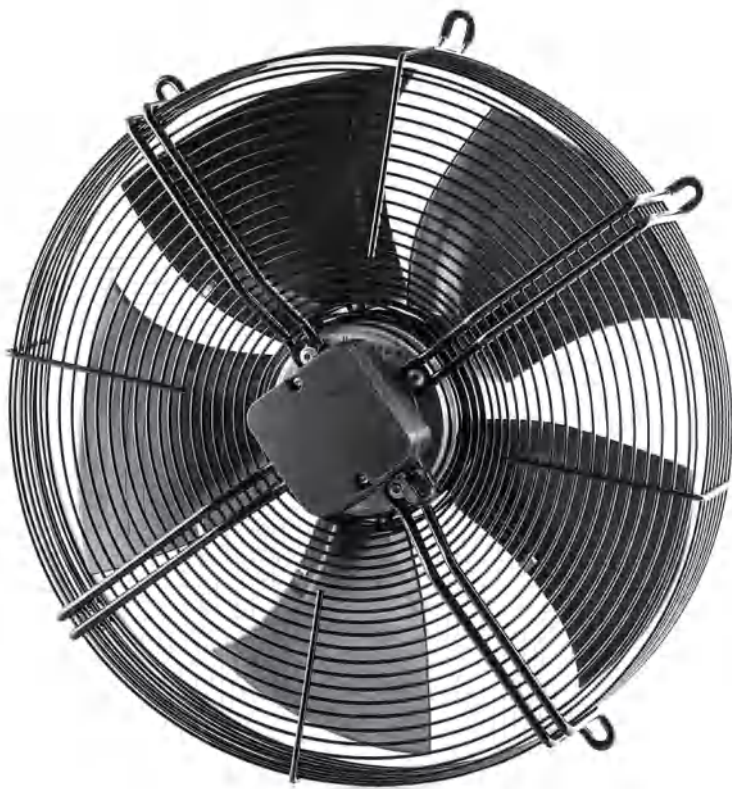

Technical Specifications

Model	Voltage	Frequency	Current	Power	Speed	Air Volume	Static Pressure	Noise	Curve
	V	Hz	A	W	RPM	m³/h	Pa	dB(A)	
LWAE3G350SS-5PNW-01	220	50/60	1.2	160	1730	3800	180	65	①
LWAE3G350ST-5PNW-02	220	50/60	1.2	160	1730	3800	180	65	
LWAE3G350SS-5PEW-03	220	50/60	1.2	160	1730	3800	180	65	
LWAE3G350ST-5PEW-04	220	50/60	1.2	160	1730	3800	180	65	
LWAE3G350SS-5PGW-05	220	50/60	1.2	160	1730	3800	180	65	
LWAE3G350ST-5PGW-06	220	50/60	1.2	160	1730	3800	180	65	

Flow Rate Curve

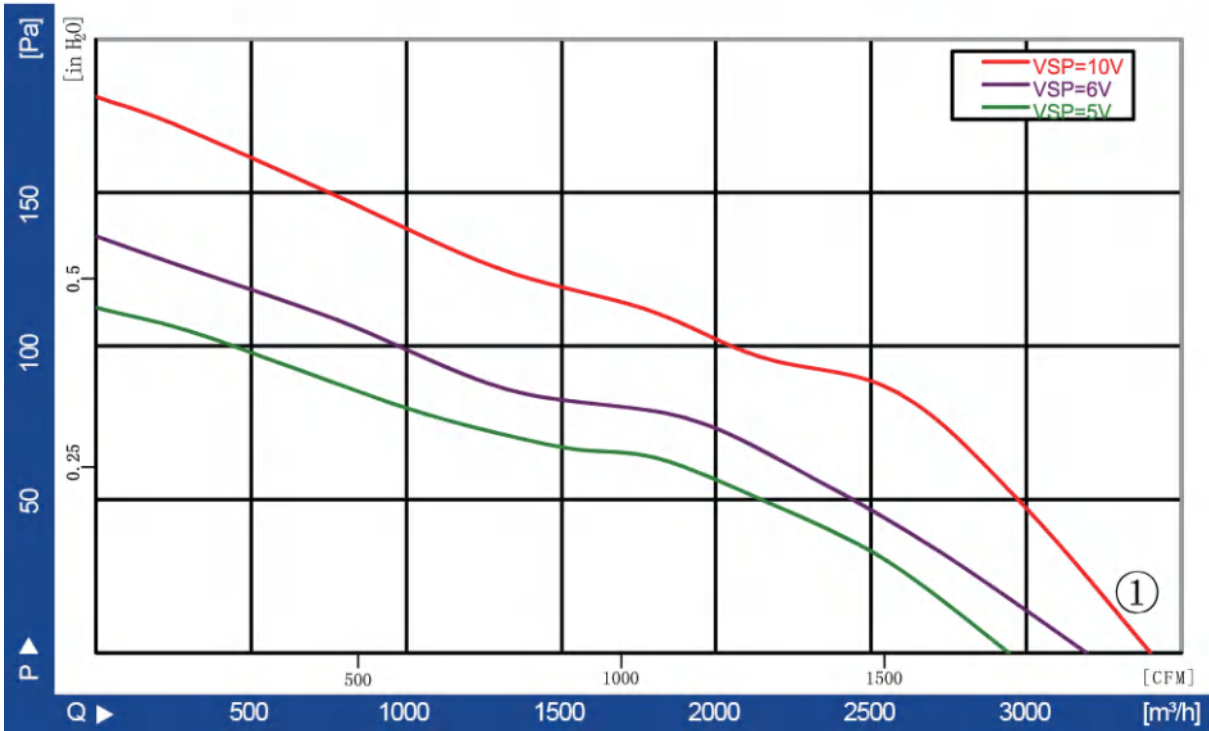

Product Drawing

LWAE3G350SS-5PNW-01(Suction)

LWAE3G350ST-5PNW-02(Blowing)

LWAE3G350SS-5PEW-03(Suction)

LWAE3G350ST-5PEW-04(Blowing)

LWAE3G350SS-5PGW-05(Suction)

LWAE3G350ST-5PGW-06(Blowing)