


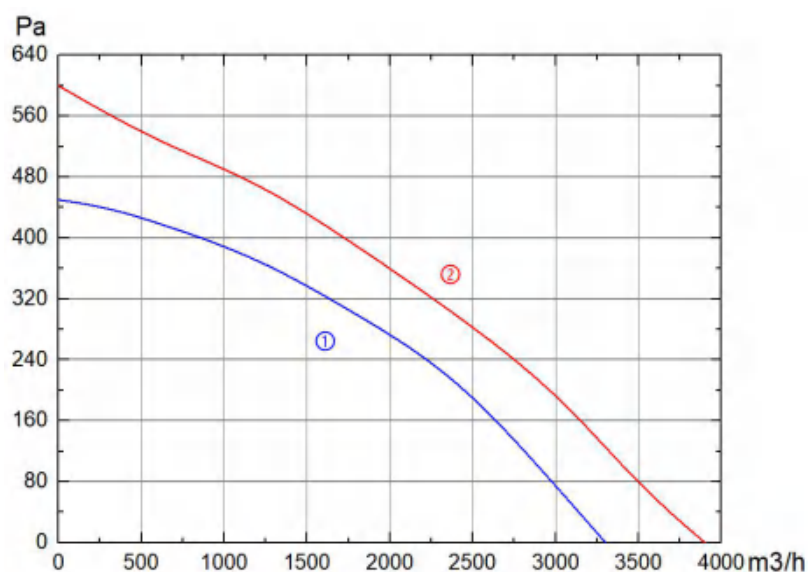

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4D-355-138NT-15	380	50	360	1.00	1450	3300	450	72	/	①
LWBA4D-355-138NT-16	380	60	550	1.10	1700	3900	600	77	/	②
LWBA4E-355-138NS-17	230	50	400	2.20	1400	3300	450	72	12	①
LWBA4E-355-138NS-18	230	60	600	2.60	1700	3900	600	77	12	②

