


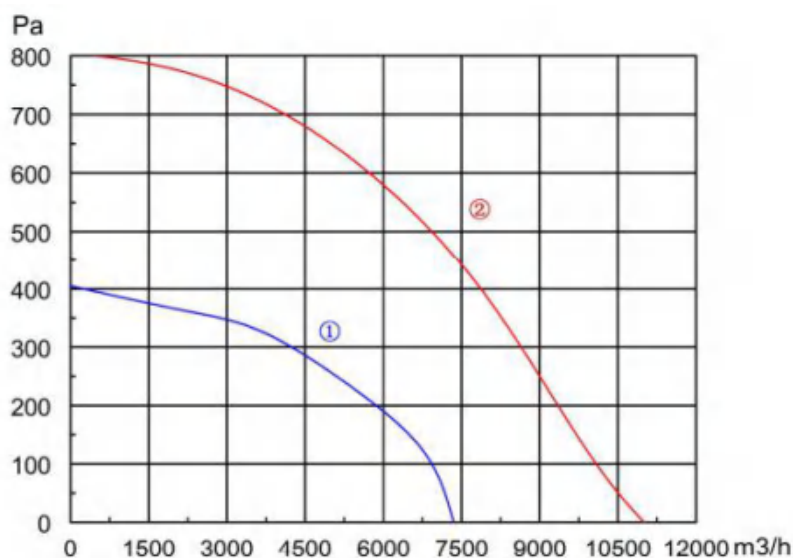

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dB(A)	uF	
LWBA4D-560-180NS-01	380	50	1800	3.2	1250	11000	805	78	/	②
LWBA6E-560-180NS-02	230	50	700	3.1	900	7350	405	68	19	①
LWBA6D-560-180NS-03	380	50	780	1.55	870	7320	400	68	/	①

