


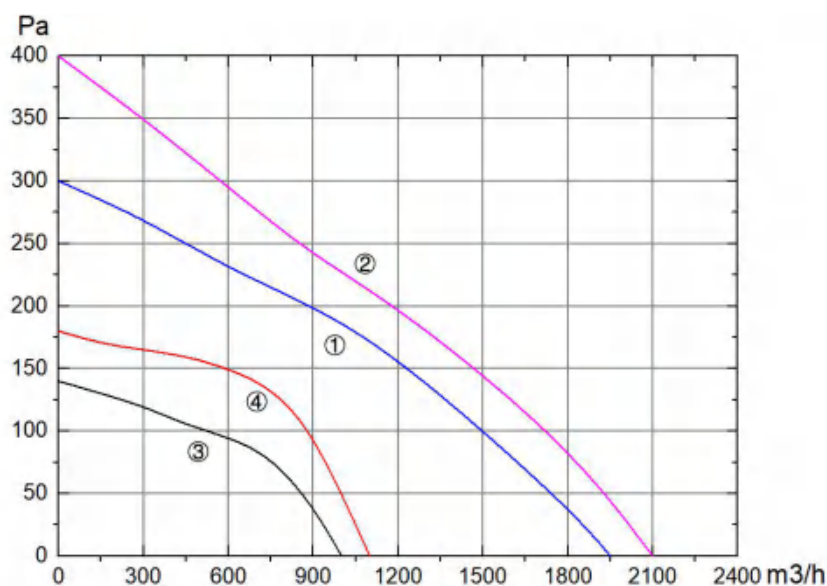

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4E-315-102NS-07	230	50	135	0.60	1400	1900	300	63	3	①
LWBA4E-315-102NS-08	230	60	180	0.80	1580	2000	400	65	3	②
LWBA6E-315-102NS-09	230	50	75	0.38	940	1000	150	58	3	③
LWBA6E-315-102NS-10	230	60	85	0.42	1050	1100	180	60	3	④
LWBA4D-315-102NT-11	380	50	136	0.35	1400	1900	300	63	/	①
LWBA4D-315-102NT-12	380	60	175	0.40	1560	2000	400	65	/	②

