


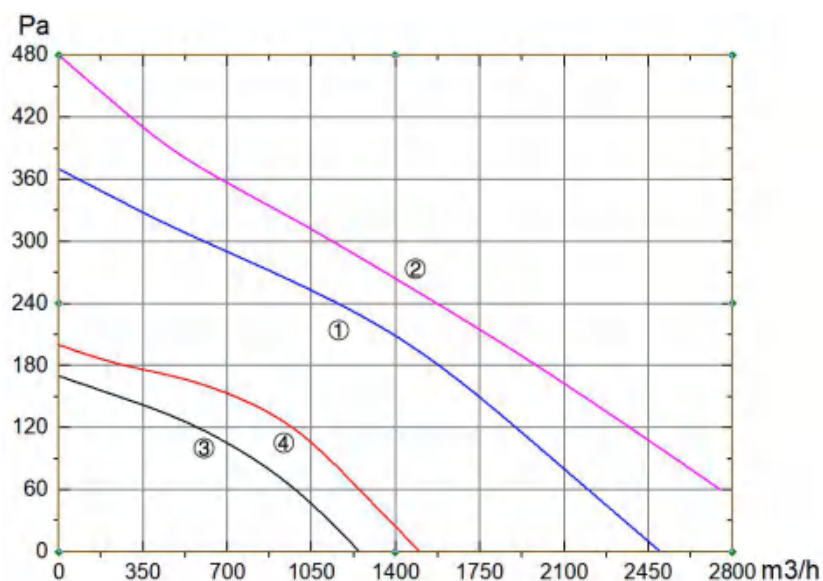

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4E-355-102NS-05	230	50	165	0.75	1400	2450	370	63	6	①
LWBA4E-355-102NS-06	230	60	245	1.20	1460	2580	500	65	6	②
LWBA6E-355-102NS-07	230	50	100	0,46	930	1220	170	60	4	③
LWBA6E-355-102NS-08	230	60	130	0.50	1080	1320	200	61	4	④
LWBA4D-355-102NT-09	380	50	170	0.46	1400	2450	370	63	/	①
LWBA4D-355-102NT-10	380	60	250	0.48	1500	2580	500	65	/	②

