


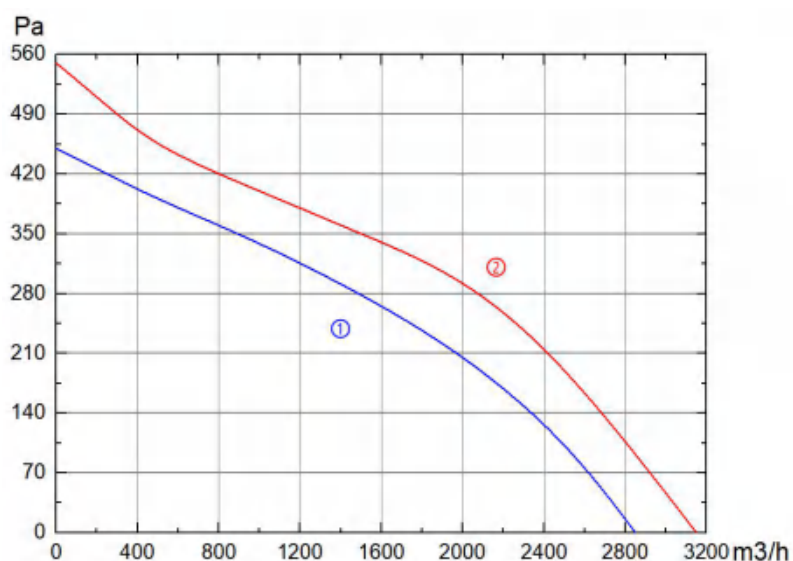

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4E-355-102NS-11	230	50	210	1.00	1350	2800	450	65	7	①
LWBA4E-355-102NS-12	230	60	280	1.35	1550	3100	500	67	6	②
LWBA4D-355-102NT-13	380	50	200	0.53	1380	2800	450	65	/	①
LWBA4D-355-102NT-14	380	60	270	0.55	1600	3100	500	67	/	②

