


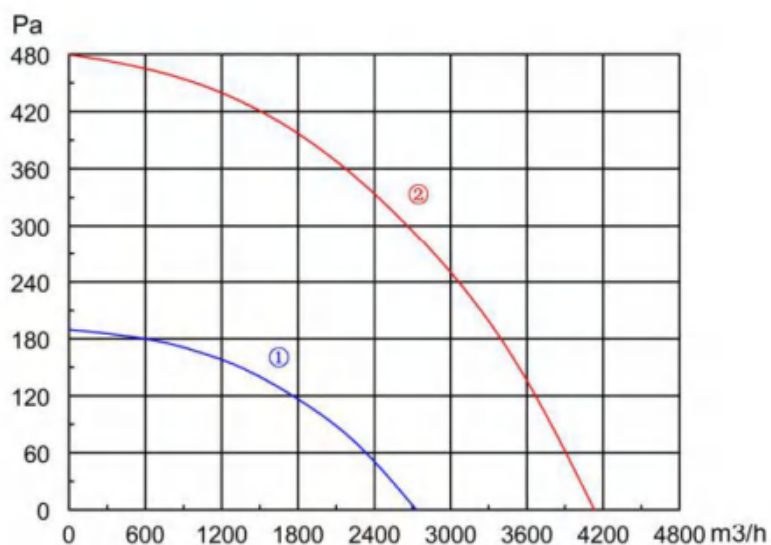

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

■ Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4E-400-102NS-01	230	50	550	2.50	1350	4130	480	65	10	②
LWBA4D-400-102NT-02	380	50	565	1.10	1350	4100	475	65	/	②
LWBA6E-400-102NS-03	230	50	185	0.85	925	2730	190	50	5	①
LWBA6D-400-102NT-04	380	50	255	0.75	900	2700	185	50	/	①

