


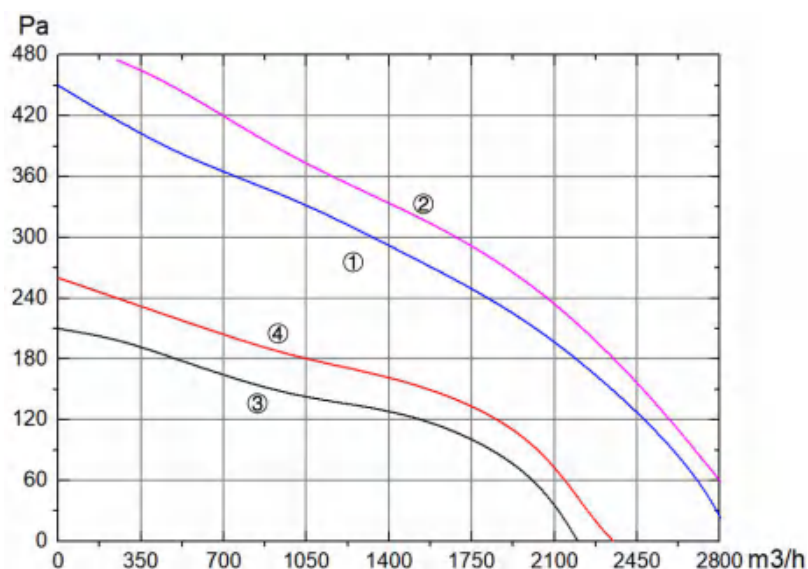

**Motor Type :** AC Motor

**Impeller Material :** Aluminum Alloy

**Protection Class :** IP44

**Insulation Class :** F

**Operation Temperature :** - 25 °C ~ +60 °C

**Bearing Type :** Ball Bearing

**Operation Model :** S1

**Direction of Rotation:** Clockwise ,see on the lead

**Protection :** Thermal Overload Protector ( TOP) wired Internally

**Certification :** CE/CCC

## Technical Specification

| Model               | Rated Voltage | Frequency | Rated Power | Rated Current | Speed | Air Flow | Air Pressure | Noise | Capacitor | Curve |
|---------------------|---------------|-----------|-------------|---------------|-------|----------|--------------|-------|-----------|-------|
|                     | V             | Hz        | W           | A             | RPM   | m³/h     | Pa           | dBA   | uF        |       |
| LWBA4E-400-102NS-05 | 230           | 50        | 260         | 1.20          | 1350  | 2850     | 450          | 64    | 7         | ①     |
| LWBA4E-400-102NS-06 | 230           | 60        | 330         | 1.50          | 1450  | 2950     | 500          | 68    | 6         | ②     |
| LWBA4D-400-102NT-07 | 380           | 50        | 265         | 0.60          | 1380  | 2850     | 450          | 64    | /         | ①     |
| LWBA4D-400-102NT-08 | 380           | 60        | 320         | 0.75          | 1460  | 2950     | 500          | 68    | /         | ②     |
| LWBA6E-400-102NS-09 | 230           | 50        | 135         | 0.72          | 940   | 2100     | 210          | 56    | 6         | ③     |
| LWBA6E-400-102NS-10 | 230           | 60        | 155         | 0.85          | 1050  | 2250     | 270          | 57    | 6         | ④     |

