


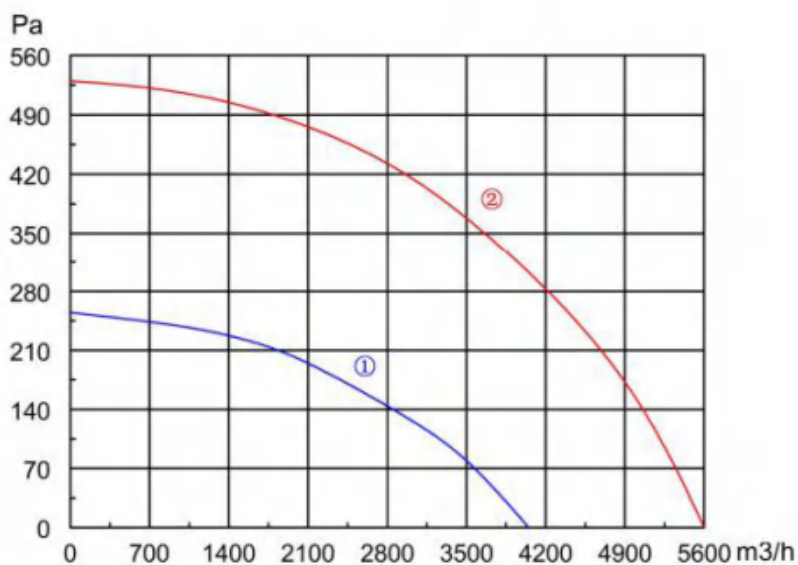

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

■ Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA4E-450-137NS-02	230	50	835	4.20	1350	5630	530	73	14	②
LWBA4D-450-137NS-03	380	50	695	1.28	1290	5100	518	73	/	②
LWBA6E-450-137NS-04	230	50	305	1.41	910	4050	255	60	10	①
LWBA6D-450-137NS-05	380	50	335	0.91	910	4010	250	60	/	①

