


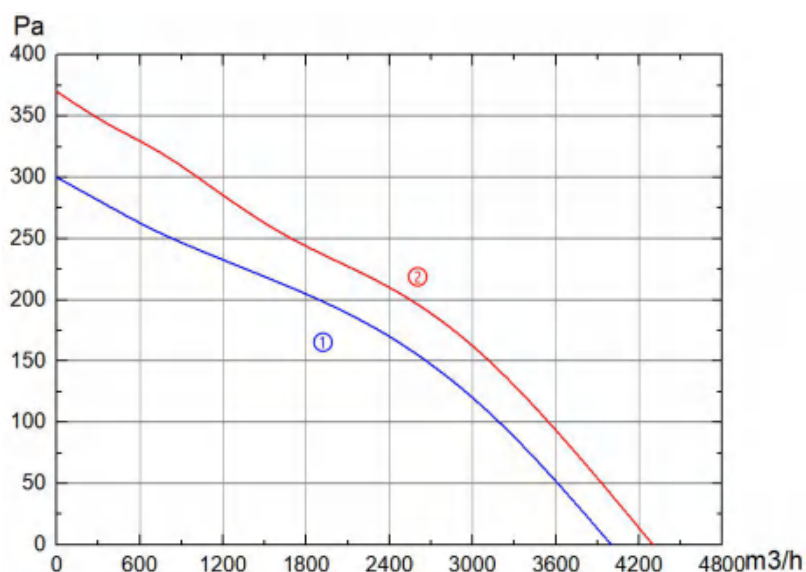

Motor Type : AC Motor

Impeller Material : Aluminum Alloy

Protection Class : IP44

Insulation Class : F

Operation Temperature : - 25 °C ~ +60 °C

Bearing Type : Ball Bearing

Operation Model : S1

Direction of Rotation: Clockwise ,see on the lead

Protection : Thermal Overload Protector (TOP) wired Internally

Certification : CE/CCC

Technical Specification

Model	Rated Voltage	Frequency	Rated Power	Rated Current	Speed	Air Flow	Air Pressure	Noise	Capacitor	Curve
	V	Hz	W	A	RPM	m³/h	Pa	dBA	uF	
LWBA6E-450-138NS-06	230	50	260	1.30	930	3900	300	60	10	①
LWBA6E-450-138NS-07	230	60	350	1.60	1050	4200	370	61	10	②
LWBA6D-450-138NT-08	380	50	300	1.00	920	3900	300	60	/	①
LWBA6D-450-138NT-09	380	60	360	1.20	1050	4200	370	61	/	②

