



Motor Type : AC External Rotor Motor

Impeller Material :Galvanized Metal Sheet


Protection Class : IP44

Insulation Class : F

Certification : CE/CCC



Operation Temperature : - 30 °C ~ +60 °C

Protection : Thermal Overload Protector (TOP)

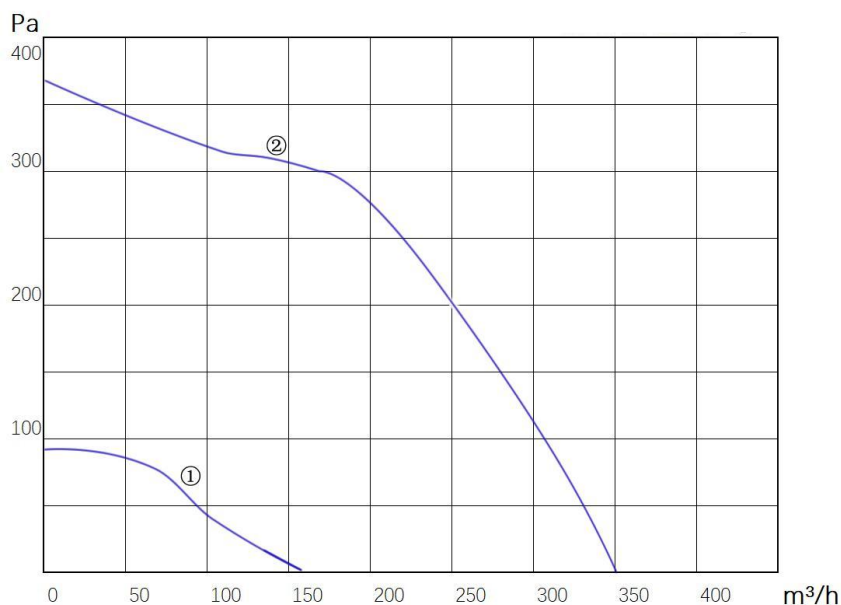

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-133-092NS-01	220~240	50/60	37	0.18	1410	230	60	2	①
LWFA2E-133-092NS-01	220~240	50/60	104	0.50	2510	330	68	3	②

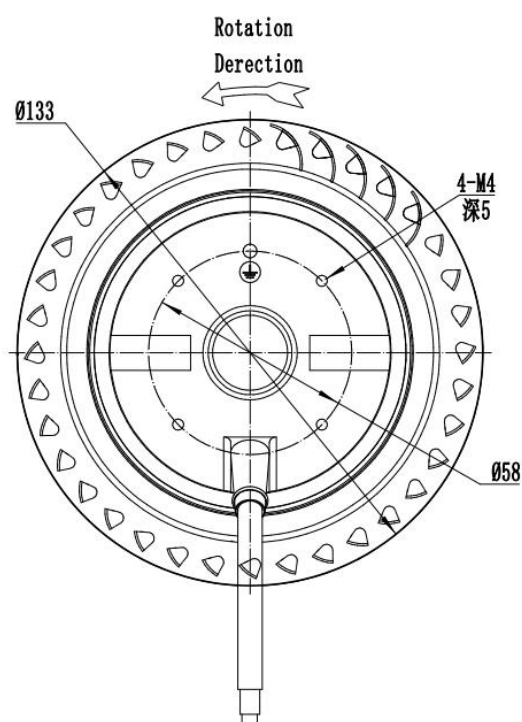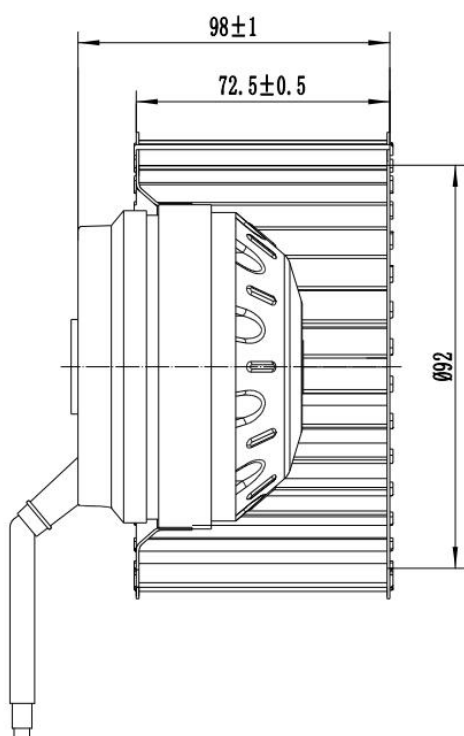



Motor Type : AC External Rotor Motor

Impeller Material :Galvanized Metal Sheet


Protection Class : IP44

Insulation Class : F

Certification : CE/CCC

Operation Temperature : - 30 °C ~ +60 °C

Protection : Thermal Overload Protector (TOP)

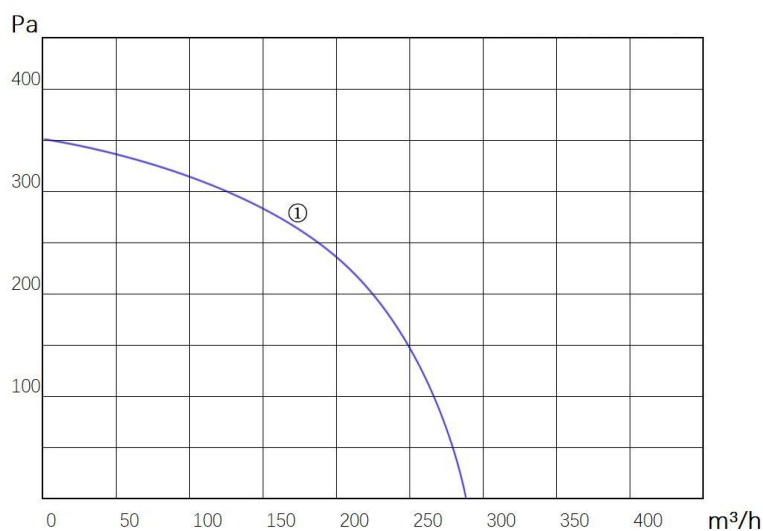

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA2E-133-092NS-02	220~240	50	70	0.32	2300	290	61	2	①
	220~240	60	85	0.40	2350	290	63	2	①

