

LWAA-710 Series

Product Characteristic

- Blades :

Steel plate
- Bearings:

Ball bearings
- Mode of operation:

S1
- Type of protection:

IP44 IP54
- Insulation class:

B/F
- Operation Temperature:


-40~+60 C



Technical Specifications

Model	Voltage	Frequency	Current	Power	Speed	Air Volume	Static Pressure	Capacitor	Noise	N.W	Curve
	V	Hz	A	W	RPM	m³/h(Max)	Pa(Max)	uF	dB(A)	kg	
LWAA6D710S-6EB-08	380	50	1.05	440	810	10165	95	/	68	19.5	①
LWAA6D710S-6EB-09	400	60	1.60	700	1020	10675	85	/	70	19.5	②
LWAA8D710S-6EB-10	380	50	1.36	330	665	7220	75	/	60	19.2	③
LWAA6D710S-7EB-11	380	50	2.05	920	1020	10445	95	/	68	20.5	④
LWAA6D710S-7EB-12	400(▲)	50	1.78	925	930	14800	110	/	77	32	⑤
LWAA6D710S-7EB-13	400(Y)	50	1.25	651	720	12400	65	/	73	32	⑥
LWAA8D710S-7EB-14	400(▲)	50	1.88	450	7000	11200	60	/	70	28.5	⑦
LWAA8D710S-7EB-15	400(Y)	50	0.61	320	530	9200	40	/	62	28.5	⑧
LWAA6D710S-5EB-16	400(▲)	50	2.10	890	910	13950	100	/	73	24	⑨
LWAA6D710S-5EB-17	400(Y)	50	1.10	670	750	12400	60	/	68	24	⑩

Flow Rate Curve

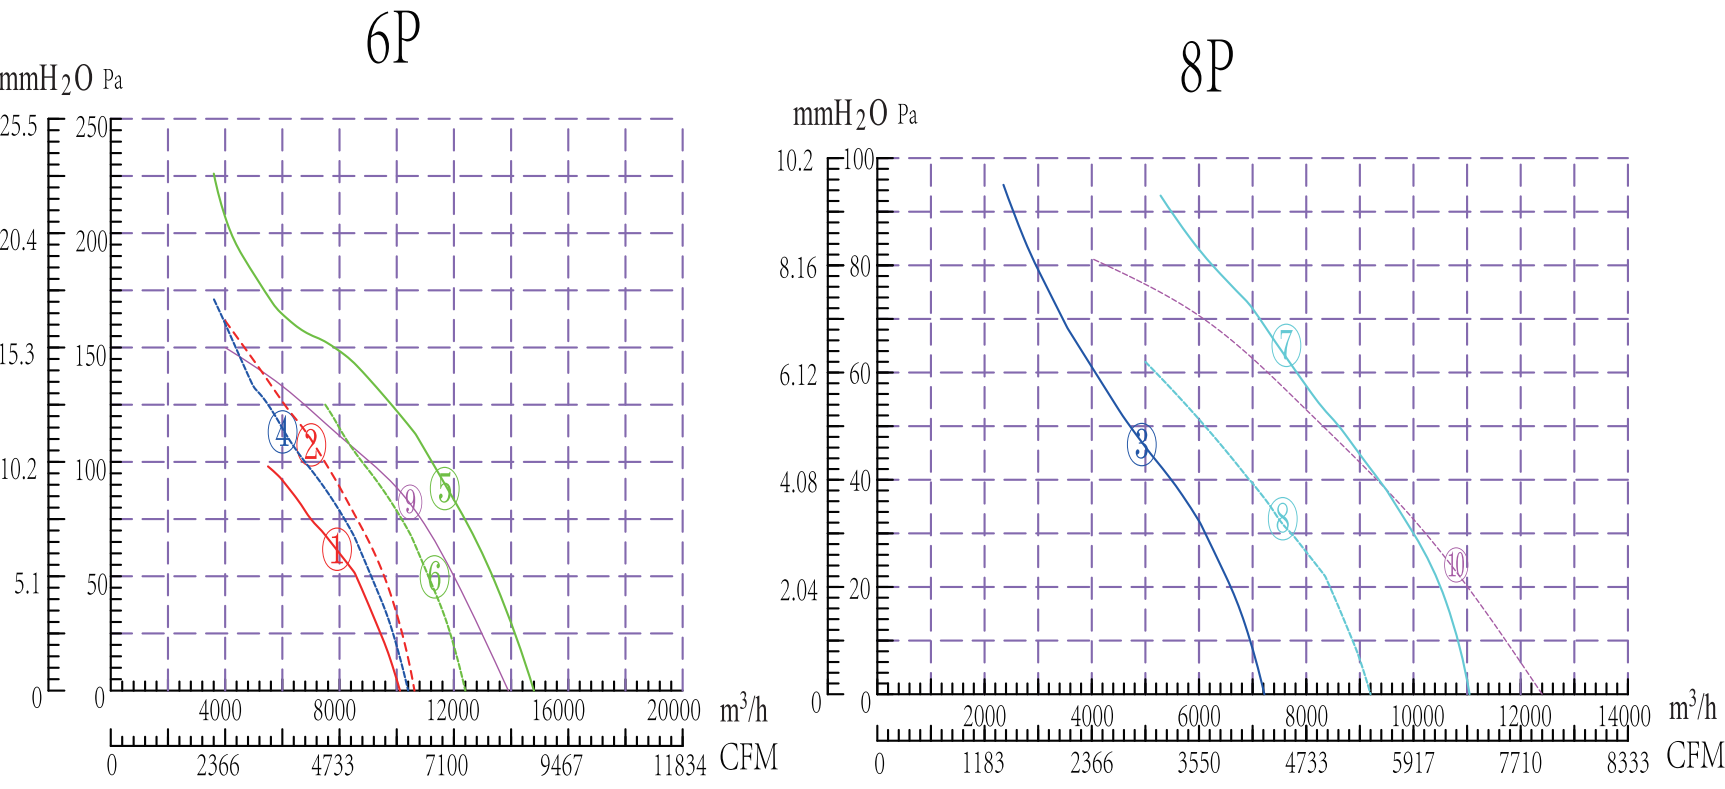

Installation Form Of The Fan


/	/	/	Model NO.E	/	Model NO.G	Model NO.K

Product Drawing

Standard Version

Model NO.E	Dimension(mm)		Blades
	A	B	
LWAA6D710S(B)-6EB-XX	138	795	6
LWAA8D710S(B)-6EB-XX	138	795	6
LWAA6D710MS(B)-7EB-XX	138	795	7
LWAA6D710MS(B)-5EB-XX	170	845	5

Customization Available

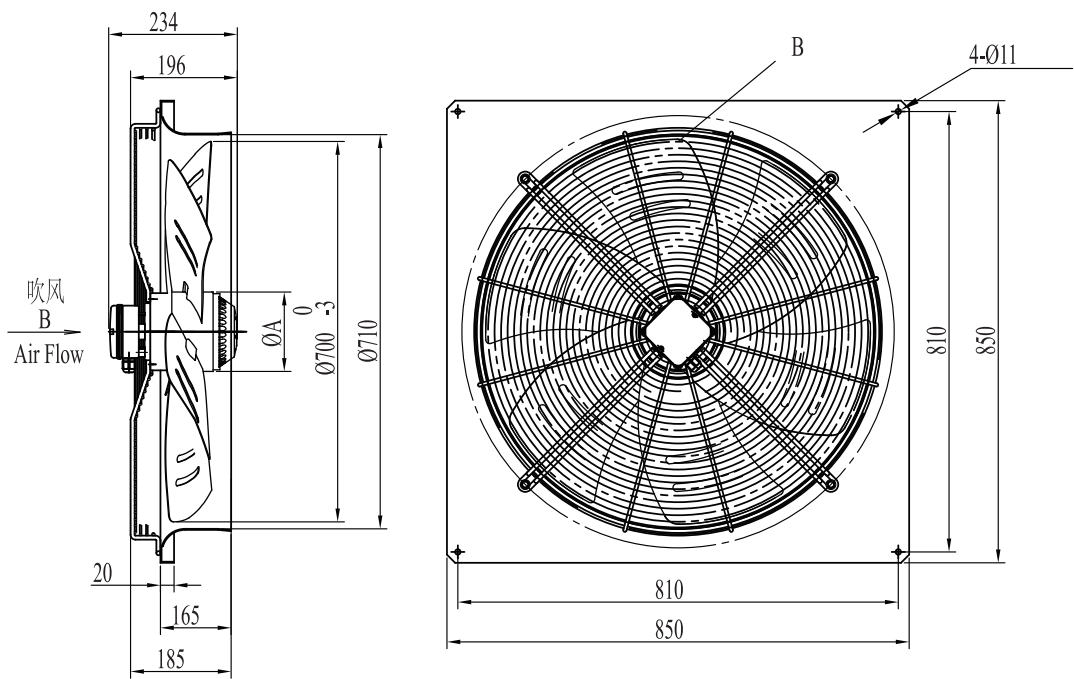

Model NO.G	Dimension(mm)		Blades
	A	C	
LWAA6D710GB-7GB-XX	180	7	
LWAA8D710GB-7GB-XX	180	7	
LWAA6D710MB-7GB-XX	138	7	

