


LWCA-30 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

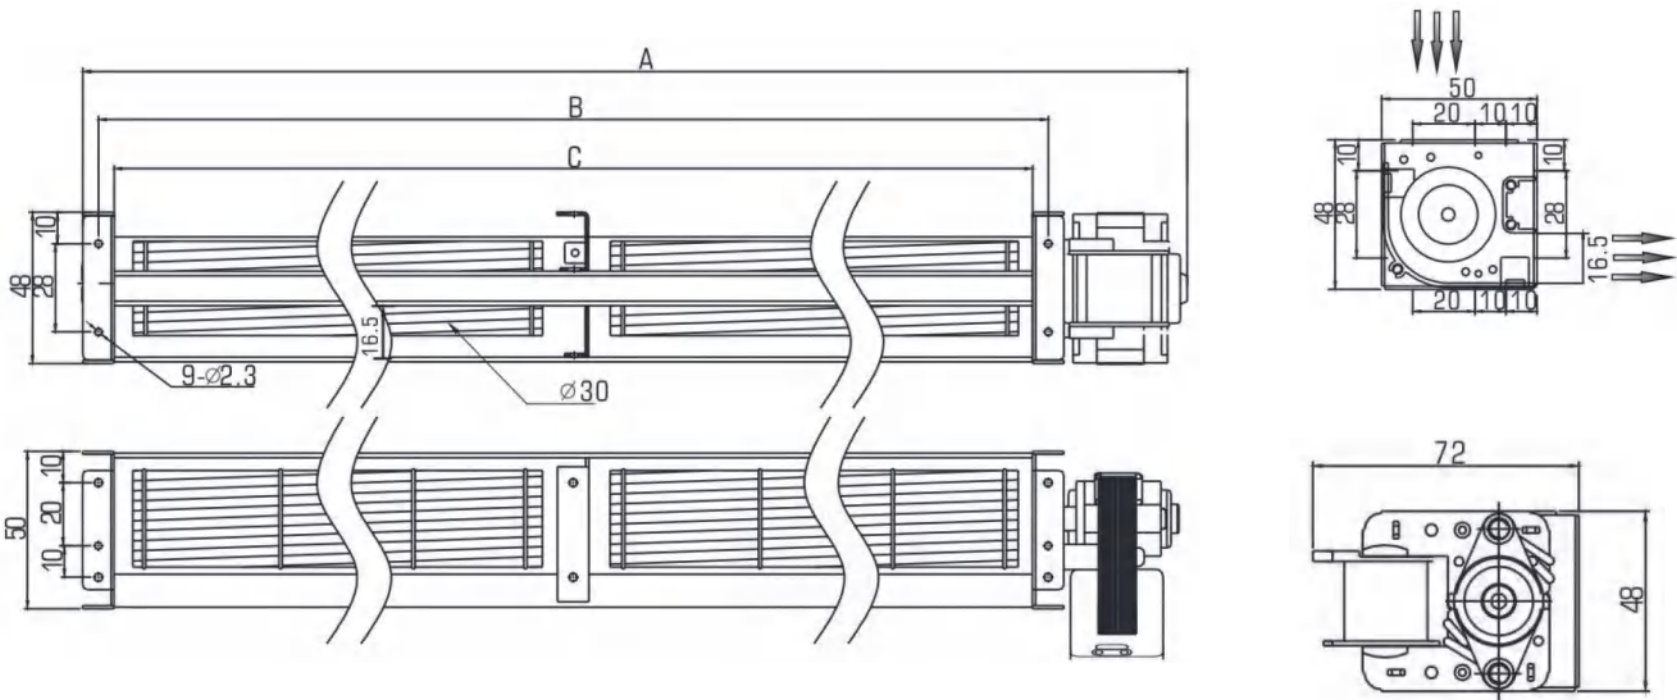

Technical Specifications

Model	Dimension(mm)			Voltage V	Frequency Hz	Power W	Speed RPM	Pressure mmH2O/Pa	Airflow m³/h	Noise dB(A)	Blower
	A	B	C								
LWCA-30530SN-01	590	540	530	220	50	19.7	2550	18	100	33	Double
LWCA-30610SN-01	670	620	610	220	50	20.3	2400	18	115	32	Double
LWCA-30718SN-01	778	728	718	220	50	21.1	2400	18	120	35	Double
LWCA-30800SN-01	860	810	800	220	50	21.1	2400	17	110	35	Triple
LWCA-30854SN-01	914	864	854	220	50	21.1	2400	17	135	36	Triple
LWCA-30920SN-01	980	930	920	220	50	21.1	2400	17	145	36	Triple
LWCA-30986SN-01	1056	996	986	220	50	21.1	2400	17	170	38	Triple


LWCA-40 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

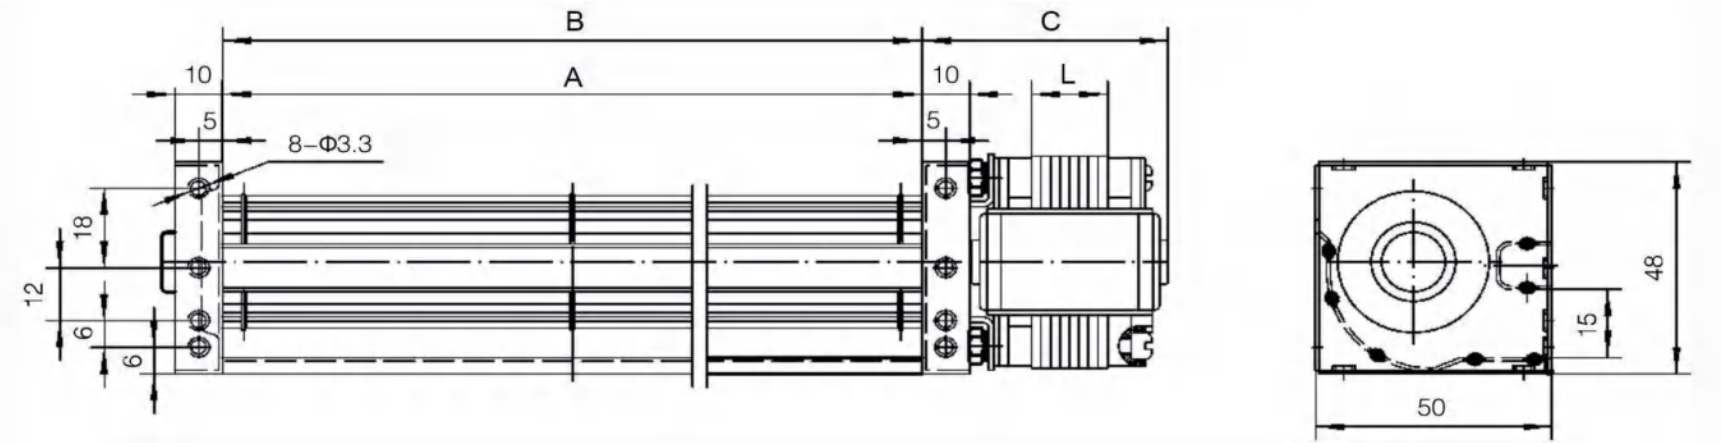

Technical Specifications

Model	Dimension(mm)			Voltage V	Frequency Hz	Power W	Speed RPM	Pressure mmH2O/Pa	Airflow m³/h	Noise dB(A)	Blower
	A	B	C								
LWCA-40120SN-01	120	128	40	220	50	8	2560	1.3/13	45	37	Single
LWCA-40180SN-01	180	188	40	220	50	11	2450	1.8/18	68	38	Single
LWCA-40240SN-01	240	248	40	220	50	13	2300	2.0/20	83	38	Single
LWCA-40300SN-01	300	308	51	220	50	16	2500	2.2/23	110	43	Single
LWCA-40360SN-01	360	368	51	220	50	20	2500	2.4/24	135	48	Single