


LWCA-40 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

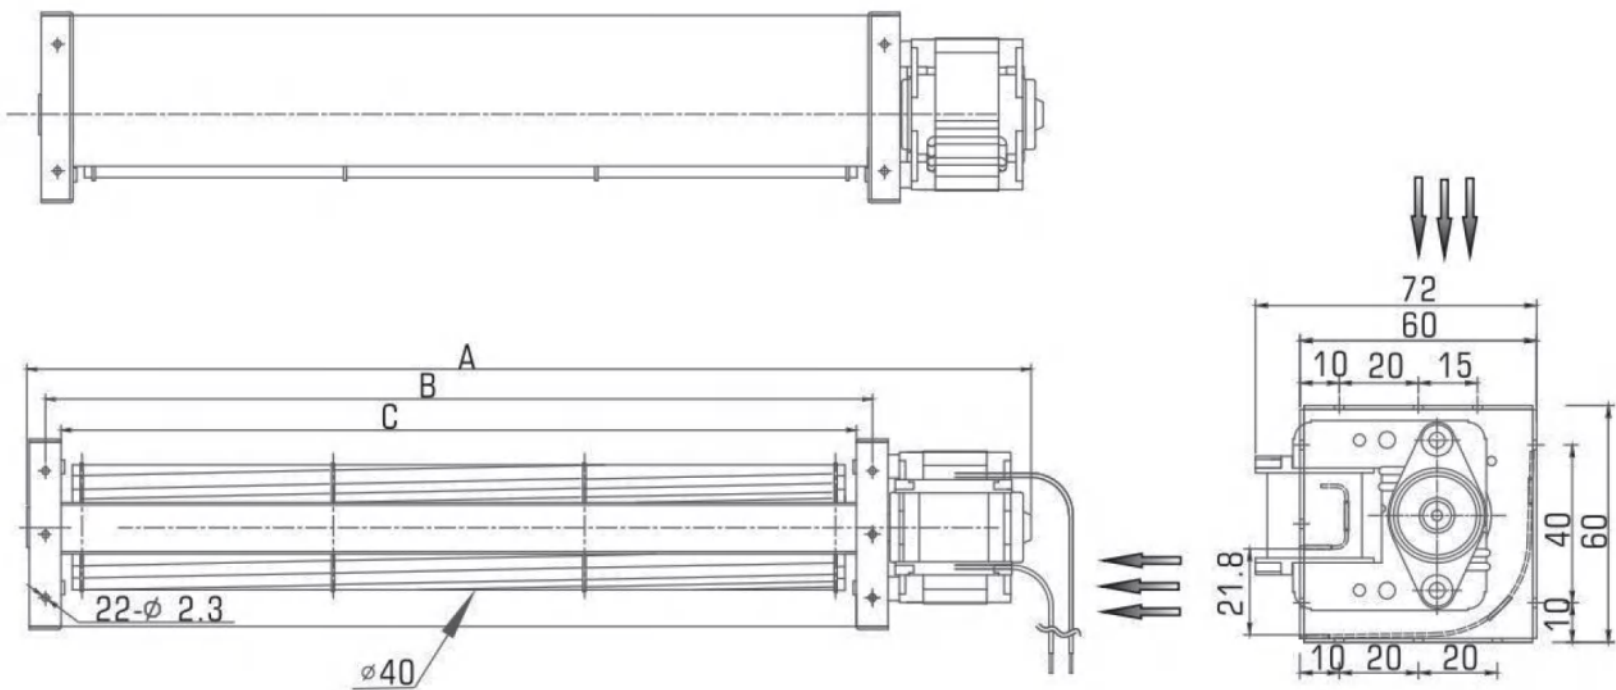

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	Hz	W	RPM	mmH2O/Pa	m³/h	dB(A)	
LWCA-4090UN-01	158	108	98	120	60	16.2	3200	25	40	35	Single
LWCA-4090SN-02				230	50	13.9	2700	20	36	35	Single
LWCA-40150UN-01	218	170	160	120	60	16.8	3000	24	60	36	Single
LWCA-40150SN-02				230	50	14.6	2500	19	57	36	Single
LWCA-40190UN-01	265	208	198	120	60	17.2	2900	24	77	38	Single
LWCA-40190SN-02				230	50	14.5	2400	19	68	36	Single
LWCA-40250UN-01	316	260	250	120	60	21.9	3000	24	98	38	Single
LWCA-40250SN-02				230	50	18.5	2500	19	90	37	Single
LWCA-40290UN-01	370	310	300	120	60	22.6	2800	23	113	39	Single
LWCA-40290SN-02				230	50	18.8	2400	19	106	38	Single
LWCA-40350UN-01	417	358	348	120	60	20.5	2900	24	152	39	Single
LWCA-40350SN-02				230	50	19.6	2500	19	132	37	Single
LWCA-40420UN-01	491	430	420	120	60	21.6	2700	22	170	38	Single
LWCA-40420SN-02				230	50	20.0	2500	19	163	37	Single


LWCA-40 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

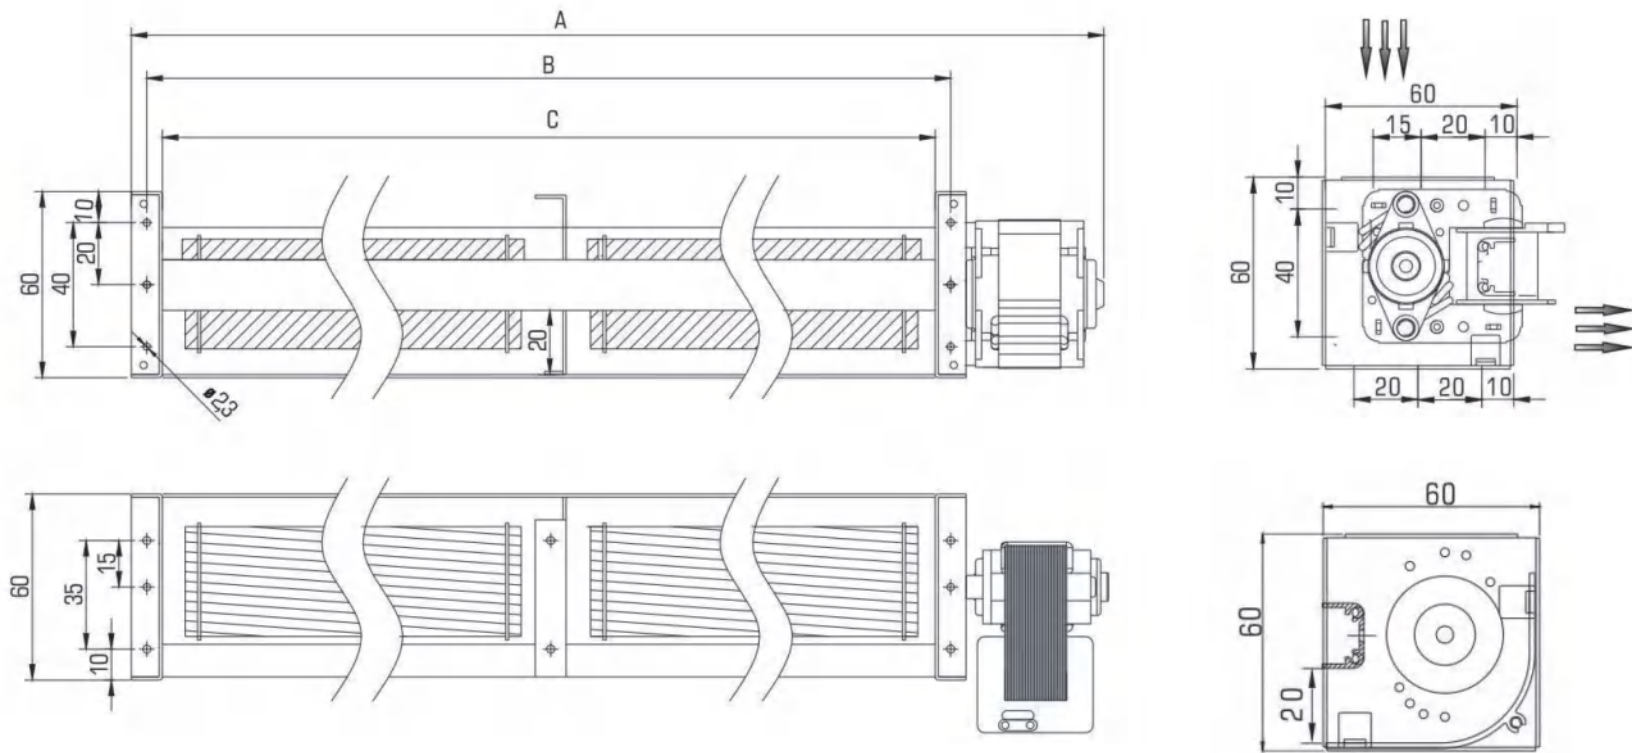

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	Hz	W	RPM	mmH2O/Pa	m³/h	dB(A)	
LWCA-40530SN-01	500	540	530	220	50	20	2000	19	140	36	Double
LWCA-40610SN-01	680	620	610	220	50	20	1950	19	150	35	Double
LWCA-40700SN-01	770	710	700	220	50	21	1750	18	155	34	Double
LWCA-40800SN-01	870	810	800	220	50	16	2300	18	205	36	Triple
LWCA-40854SN-01	924	864	854	220	50	16	2200	18	209	37	Triple
LWCA-40920SN-01	990	930	920	220	50	17	2100	18	222	37	Triple
LWCA-401055SN-01	1125	1065	1055	220	50	17	2100	18	255	38	Triple