


LWCD-43 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

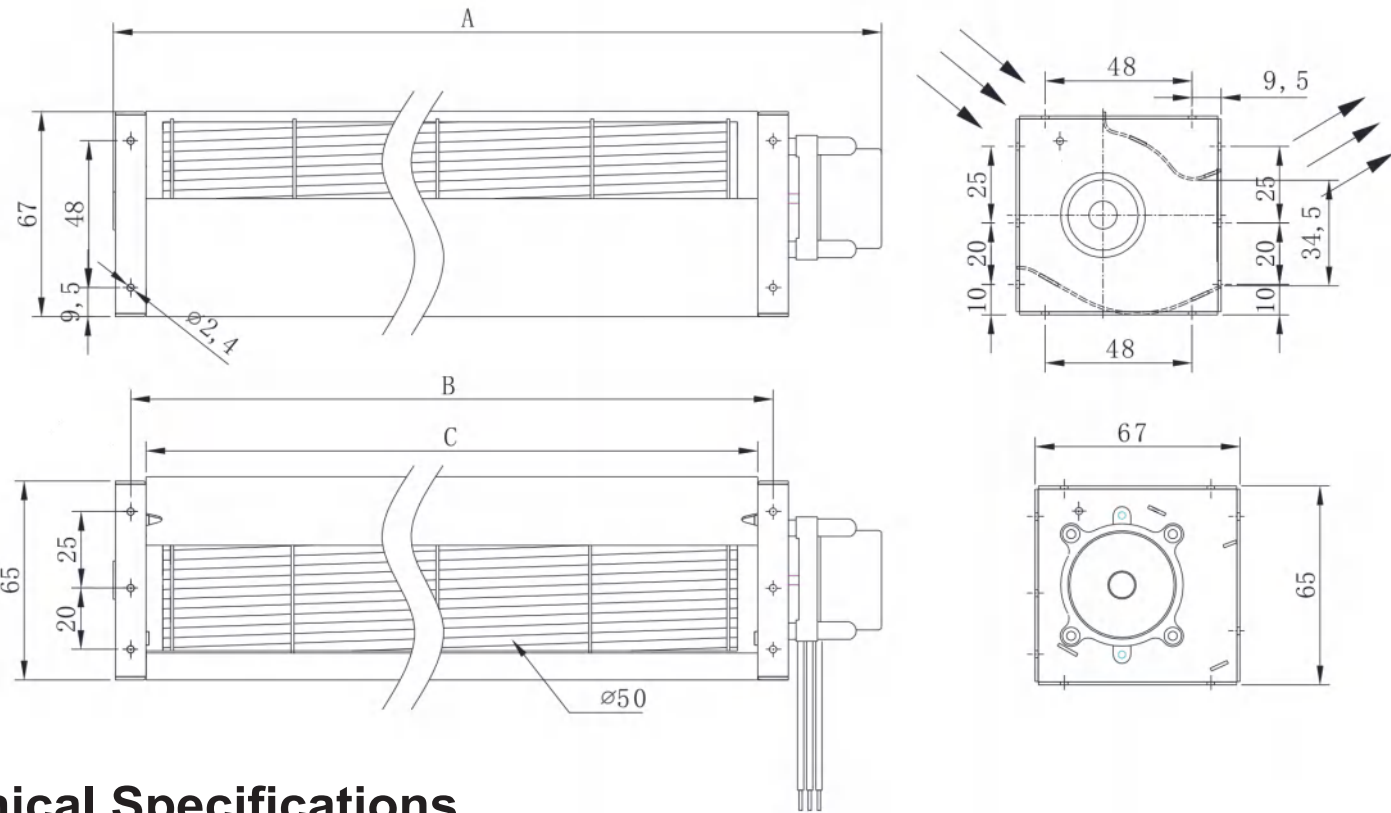

Technical Specifications

Model	Dimension(mm)			Voltage	Current	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	A	RPM	Pa	m³/h	dB(A)	
LWCD-4390LN-01	145	108	98	12	0.12	3000	19	43	36	Single
LWCD-4390MN-02				24	0.07	3000	19	43	36	Single
LWCD-43150LN-01	210	170	160	12	0.18	2700	12	75	37	Single
LWCD-43150MN-02				24	0.10	2700	12	75	37	Single
LWCD-43190LN-01	230	208	198	12	0.20	2500	11	90	39	Single
LWCD-43190MN-02				24	0.12	2500	11	95	39	Single
LWCD-43250LN-01	300	260	250	12	0.23	2400	10	102	40	Single
LWCD-43250MN-02				24	0.13	2400	10	102	40	Single
LWCD-43290LN-01	352	310	300	12	0.26	2300	8	120	41	Single
LWCD-43290MN-02				24	0.14	2300	8	120	41	Single
LWCD-43350LN-01	417	358	348	12	0.29	2100	12	138	41	Single
LWCD-43350MN-02				24	0.16	2100	12	138	41	Single
LWCD-43420LN-01	472	430	420	12	0.32	2000	13	150	43	Single
LWCD-43420MN-02				24	0.17	2000	13	150	43	Single


LWCD-45 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

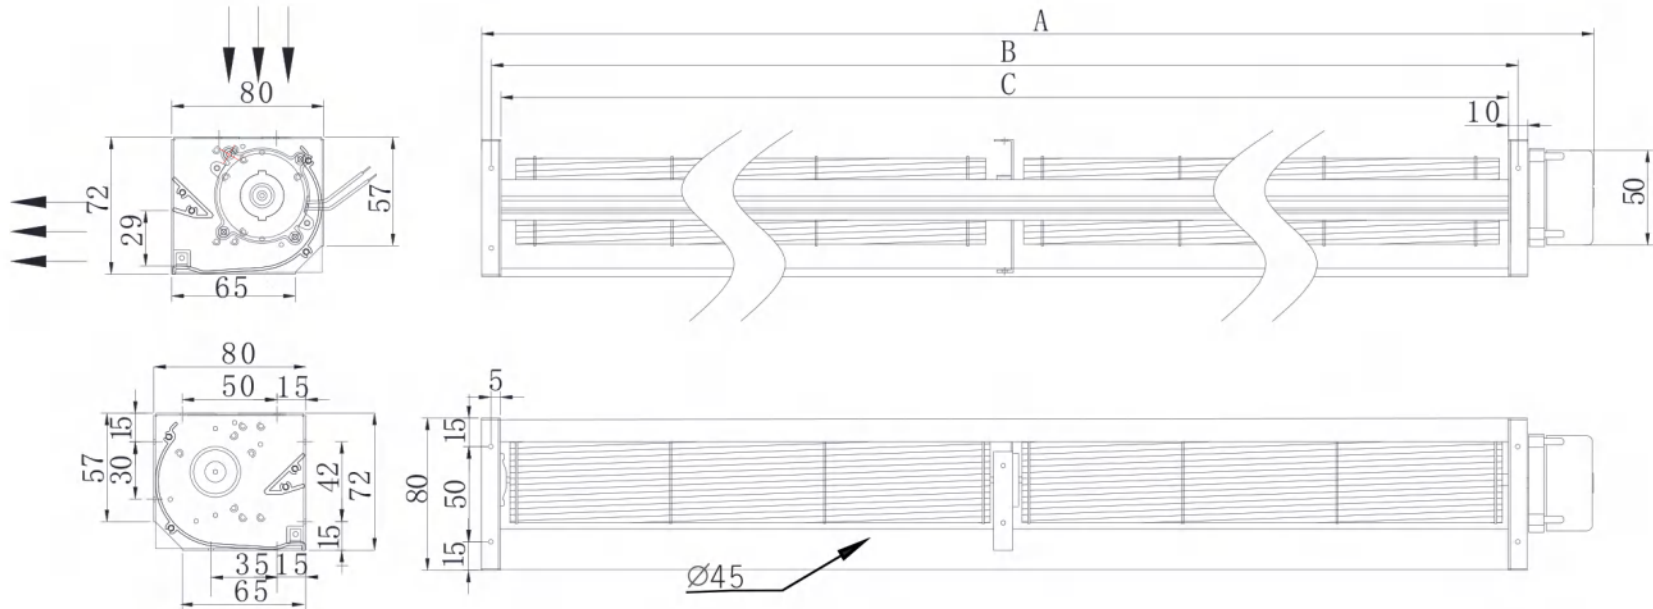

Technical Specifications

Model	Dimension(mm)			Voltage	Current	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	A	RPM	Pa	m³/h	dB(A)	
LWCD-45530MN-01	585	540	530	24	0.49	2000	28	366	48	Double
LWCD-45630MN-01	685	640	630	24	0.70	2000	28	384	59	Double
LWCD-45700MN-01	755	710	700	24	0.85	2000	28	430	53	Double
LWCD-45750MN-01	805	760	750	24	0.94	2000	28	495	50	Double