


LWCD-60 Series

Product Characteristic

- | | |
|---------------------------|----------------------|
| • Motor Type : | 3 Phase BLDC Motor |
| • Housing Material : | Steel+Aluminum Alloy |
| • Blade Material : | Aluminum Alloy |
| • Insulation Class : | B |
| • Bearing Type: | Ball bearing |
| • Operation Temperature : | - 25 ℃ ~ +60 ℃ |



Product Drawing

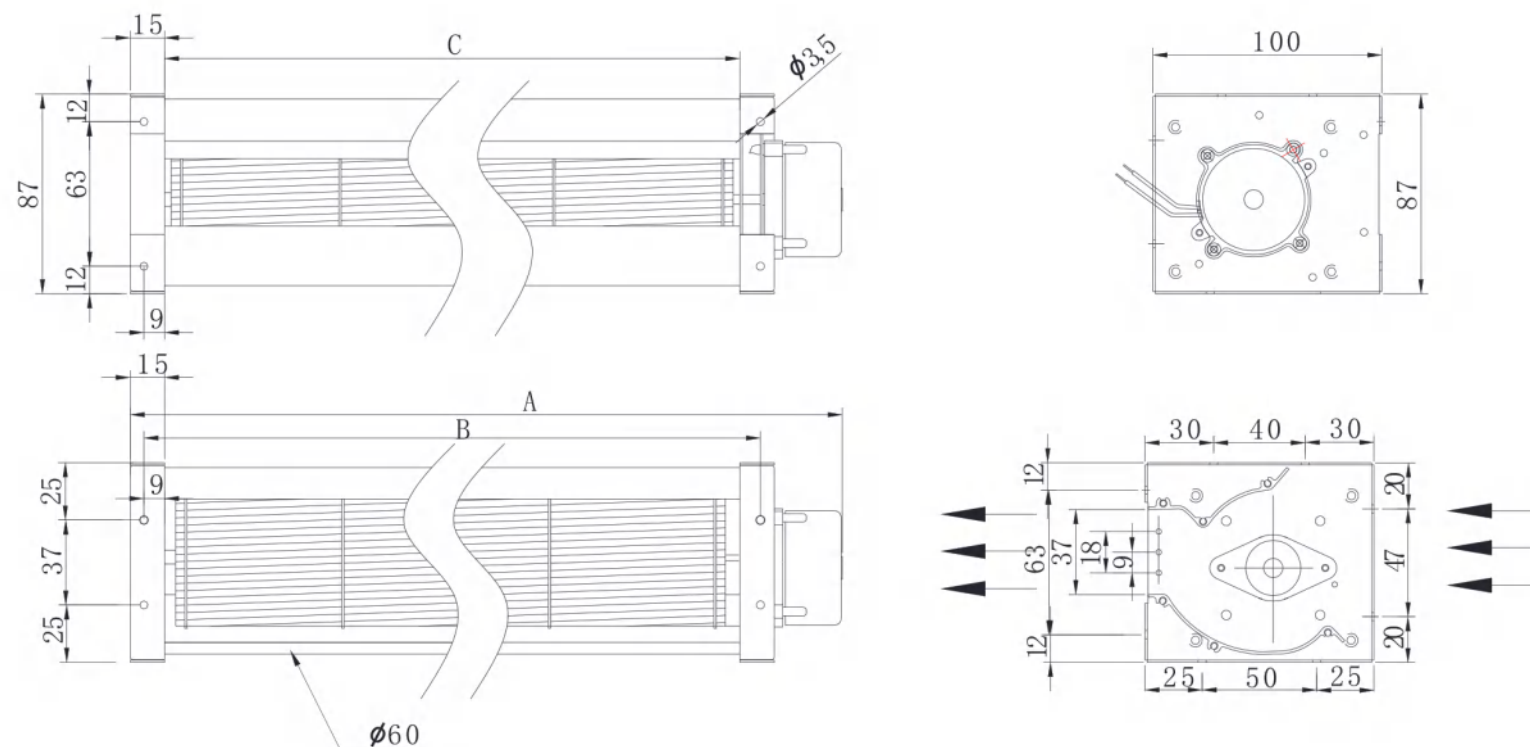

Technical Specifications

Model	Dimension(mm)			Voltage	Current	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	A	RPM	Pa	m³/h	dB(A)	
LWCD-60240MN-03	310	268	250	24	0.20	2400	22	152	40	Single
LWCD-60300MN-03	370	328	310	24	0.25	2400	24	186	40	Single
LWCD-60360MN-03	410	368	350	24	0.30	2400	24	212	41	Single
LWCD-60420MN-04	485	443	425	24	0.40	2400	24	277	42	Single
LWCD-60520MN-02	580	538	520	24	0.45	2400	24	315	43	Single


LWCD-60 Series

Product Characteristic

- | | |
|---------------------------|----------------------|
| • Motor Type : | 3 Phase BLDC Motor |
| • Housing Material : | Steel+Aluminum Alloy |
| • Blade Material : | Aluminum Alloy |
| • Insulation Class : | B |
| • Bearing Type: | Ball bearing |
| • Operation Temperature : | - 25 °C ~ +60 °C |



Product Drawing

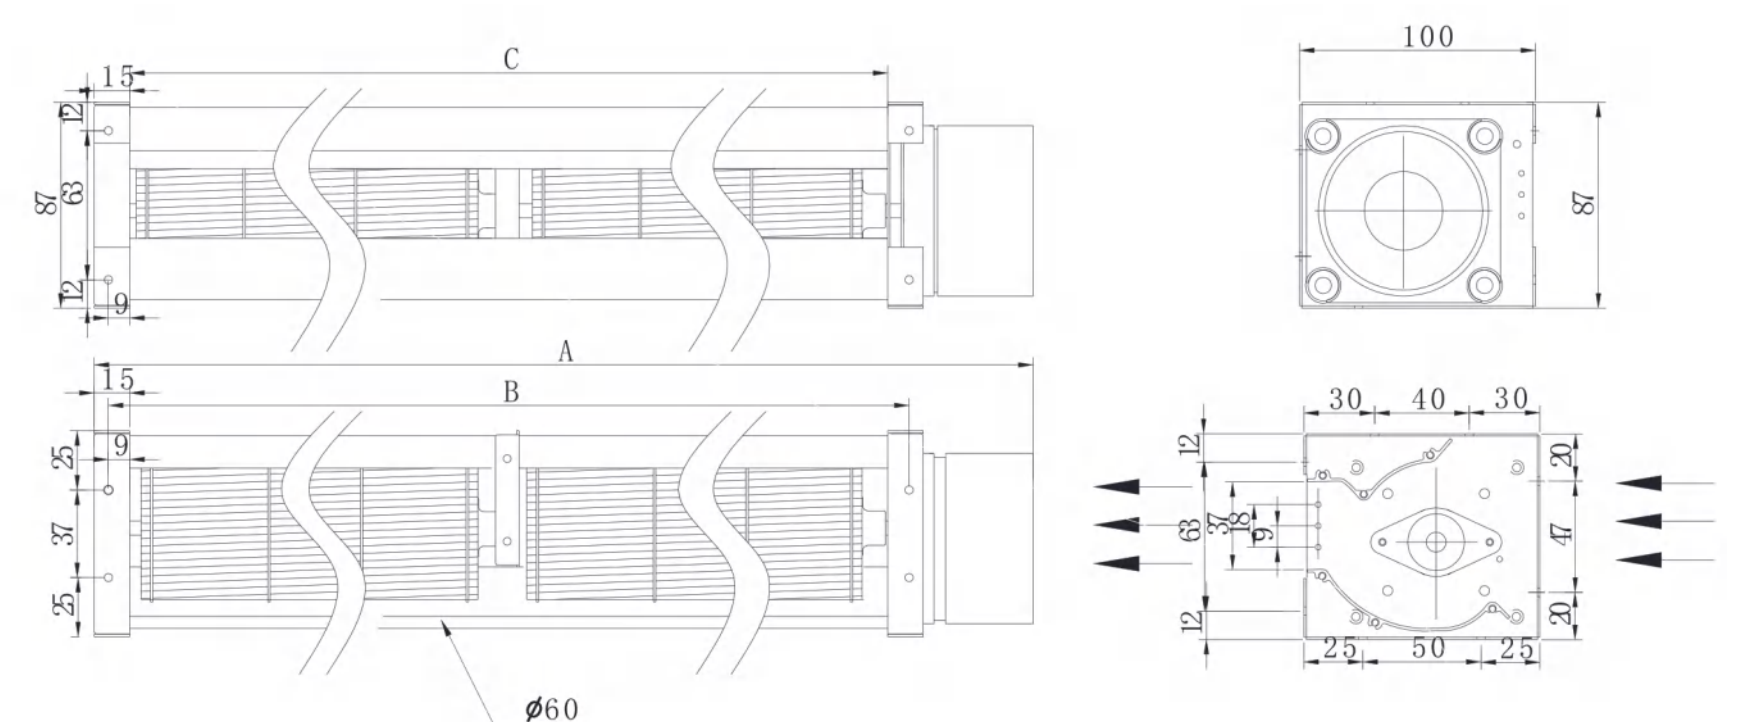

Technical Specifications

Model	Dimension(mm)			Voltage	Current	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	A	RPM	Pa	m³/h	dB(A)	
LWCD-60610MN-02	693	628	610	24	0.60	2400	24	380	44	Double
LWCD-60750MN-02	833	768	750	24	0.65	2400	24	440	44	Double
LWCD-60870MN-02	953	888	870	24	0.80	2400	24	510	46	Double
LWCD-60920MN-02	1003	938	920	24	0.85	2400	24	540	46	Triple
LWCD-601080MN-02	1163	1098	1080	24	1.00	2400	24	630	47	Triple
LWCD-601300MN-02	1383	1318	1300	24	1.20	2400	24	760	47	Triple