

LWCD-65 Series

Product Characteristic

- Motor Type :

3 Phase BLDC Motor
- Housing Material :

Steel+Aluminum Alloy
- Blade Material :

Aluminum Alloy
- Insulation Class :


B
- Bearing Type:

Ball bearing
- Operation Temperature :

- 25 ℃ ~ +60 ℃



Product Drawing

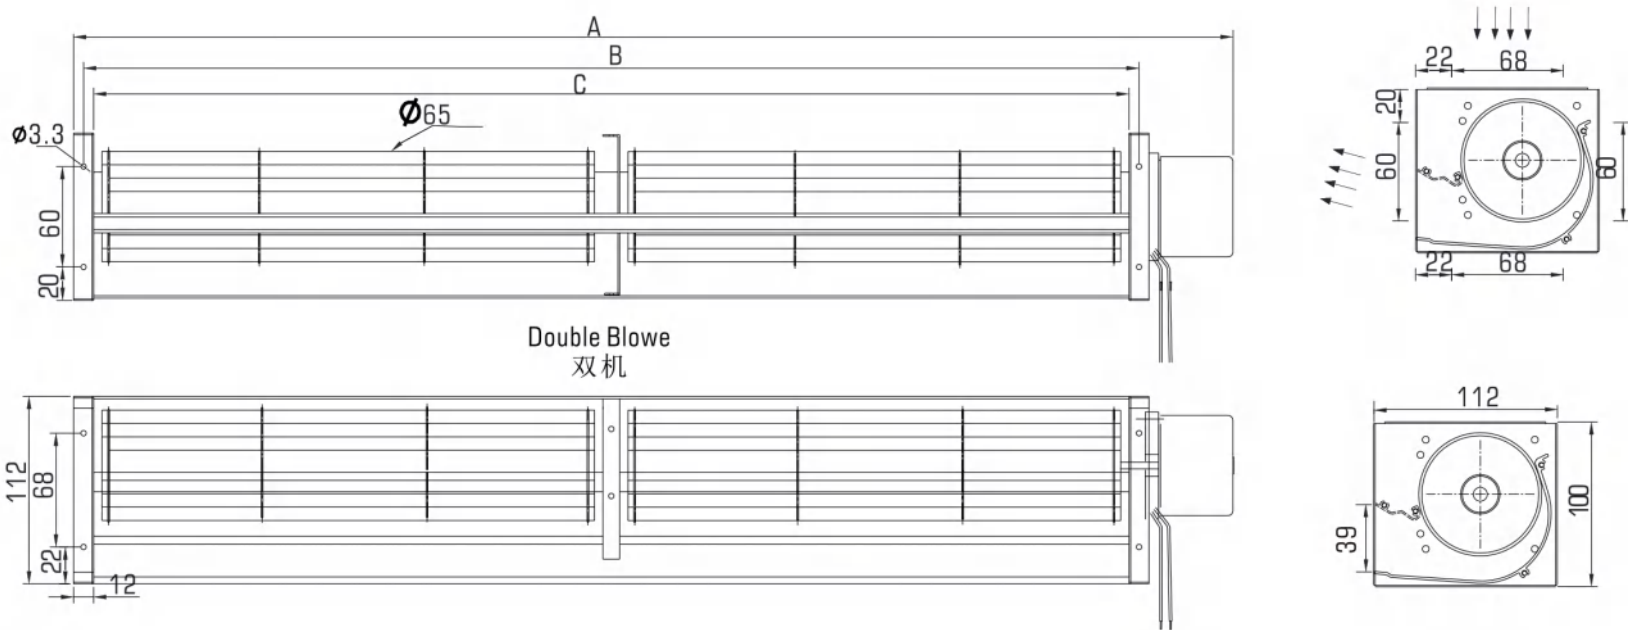

Technical Specifications

Model	Dimension(mm)			Voltage	Current	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	V	A	RPM	Pa	m³/h	dB(A)	
LWCD-65520MN-01	589	534	520	24	1.20	1800	64	705	50	Single
LWCD-65520LN-02				12	2.70	1800	64	705	50	Single
LWCD-65620MN-01	689	634	620	24	1.25	1800	64	825	51	Single
LWCD-65620LN-02				12	2.50	1800	64	825	51	Single
LWCD-65720MN-01	789	734	720	24	1.30	1800	64	860	50	Double
LWCD-65720LN-02				12	2.60	1800	64	860	50	Double
LWCD-65750MN-01	819	764	750	24	1.40	1800	64	880	50	Double
LWCD-65750LN-02				12	2.80	1800	64	880	50	Double
LWCD-65820MN-01	889	834	820	24	1.50	1800	65	920	53	Double
LWCD-65820LN-02				12	3.00	1800	65	920	53	Double
LWCD-65870MN-01	939	884	870	24	1.60	1800	65	970	53	Double
LWCD-65870LN-02				12	3.20	1800	65	970	53	Double
LWCD-651100MN-01	1174	1119	1105	24	4.20	1600	55	1225	56	Triple
LWCD-651300MN-01	1374	1319	1305	24	4.20	1600	55	1445	56	Triple