



Motor Type : AC external rotor motor ;

Housing Material : Zinc galvanized steel ;

Impeller Material : Plastic / Galvanized Steel ;

Fan Holder Material : Galvanized steel ;



Control Box Material : Plastic ;

Insulation Class : F ;

Certification : CE/CCC ;

Operation Temperature : - 30 °C ~ +60 °C

■ Dimensions

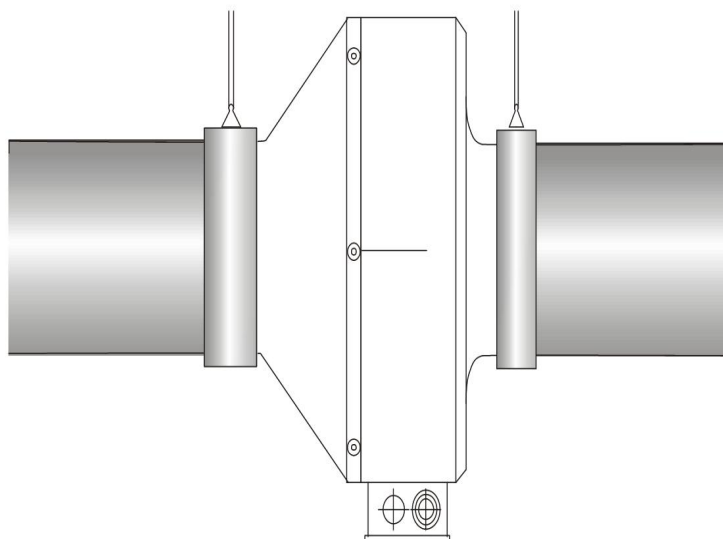
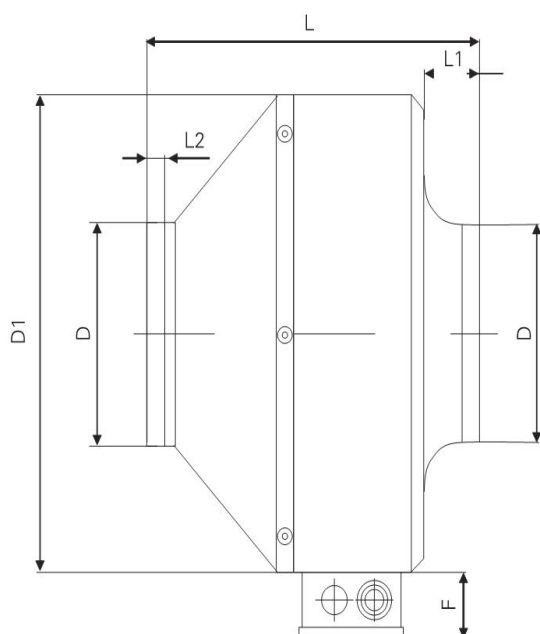


Model	D	D1	L	L2	L1	F
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
LWDAMO-100 (4")	100.00	240.00	195.00	23.00	23.00	44.00
LWDAMO-125 (5")	125.00	240.00	195.00	26.00	26.00	44.00
LWDAMO-150(6")	150.00	330.00	235.00	24.00	24.00	44.00
LWDAMO-160(6")	160.00	330.00	235.00	27.00	27.00	44.00
LWDAMO-200(8")	200.00	330.00	215.00	33.00	33.00	44.00
LWDAMO-250(10")	250.00	330.00	210.00	30.00	30.00	44.00
LWDAMO-315(12")	315.00	395.00	245.00	30.00	30.00	44.00

Specifications

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Pressure (Pa)	Noise (dBA)	IP Class
LWDAMO (4")	110-120	60	72	0.61	2700	345	350	45	44
	220-240	50	74	0.30	2500	300	300	45	44
LWDAMO (5")	110-120	60	75	0.65	2700	430	380	45	44
	220-240	50	77	0.30	2500	370	330	45	44
LWDAMO (6")	110-120	60	132	1.00	2650	700	430	48	44
	220-240	50	110	0.50	2500	620	355	48	44
LWDAMO (6")	110-120	60	135	1.10	2650	730	450	48	44
	220-240	50	115	0.50	2480	660	380	48	44
LWDAMO (8")	110-120	60	200	1.70	2550	1150	550	50	44
	220-240	50	130	0.56	2500	1000	430	50	44
LWDAMO (10")	110-120	60	315	1.80	2550	1200	600	50	44
	220-240	50	140	0.61	2450	1100	490	50	44
LWDAMO (12")	110-120	60	245	2.00	2550	1800	790	52	44
	220-240	50	230	1.00	2450	1600	710	52	44

Performance Curve

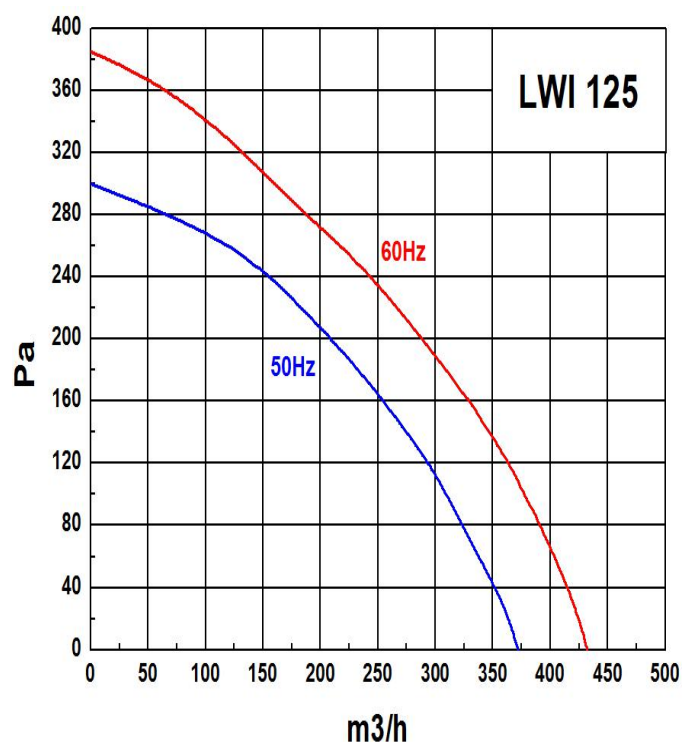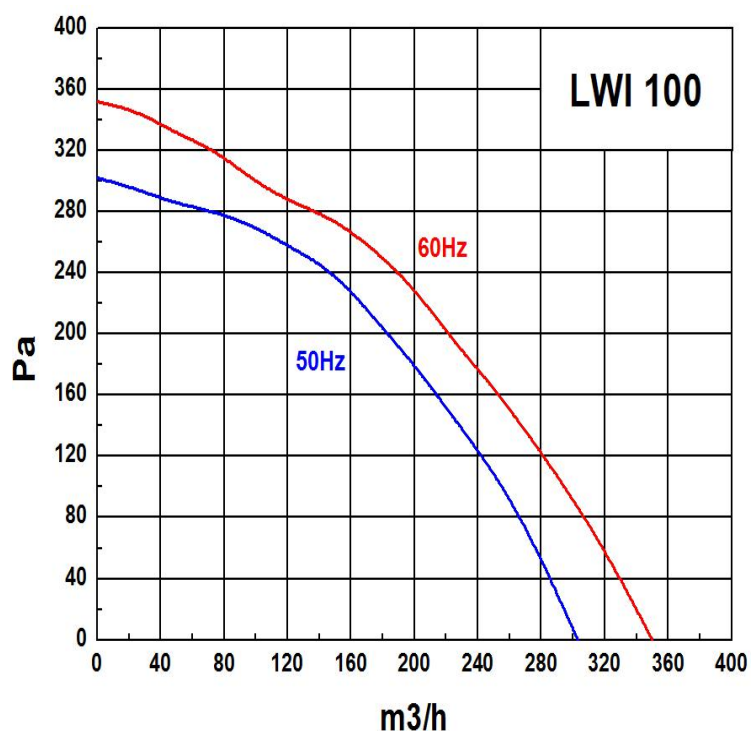

Performance Curve

