

Inflatable Blower UK Standard (UKCA Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage:bouncy castles / jumping bed / tent / and other uses.

Product Drawing



Technical Parameters


Model	Voltage (V)	Frequency (Hz)	Power (W)	Boosting pressure(Pa)	Air flow (m³/h)	Product size (cm)	Caliber (mm)	N.W./G.W. (Kg)	Package size (cm)
LWA-370-03	230	50	370	1500	750	37×18×37	110	4.1 / 5.1	38×21×38.5
LWA-550-03	230	50	550	1800	800	37×18×37	110	4.5 / 5.5	38×21×38.5
LWA-680-03	230	50	680	1950	850	43×22×43	120	6 / 7.6	44×23.5×45
LWA-750-03	230	50	750	2200	900	43×24×43	140	7 / 8.6	44×25.5×45
LWA-950-03	230	50	950	2400	1050	43×24×43	140	7.2 / 8.8	44×25.5×45
LWA-1100-03	230	50	1100	2550	1200	43×24×43	140	7.5 / 9.1	44×25.5×45

Inflatable Blower Australian Standard (SSA Certification)

Product Characteristic

- Double-sided fan blade design, larger air volume and wind pressure, strong heat dissipation, ensuring long-term continuous and stable work.
- Energy-efficient motor, energy-saving, high efficiency, durable, strong core brings continuous and stable wind pressure operation.
- Advanced design concept, low noise and energy saving.
- Integrated fuselage, closed design, safe and reliable.
- Wide application range, designed for different scenes.
- Rain-proof, flame-retardant and cold-resistant shell, after thousands of high voltage test, can handle various unexpected situations with peace of mind, and can be used safely in any weather.
- Product usage:bouncy castles / jumping bed / tent / and other uses.

Product Drawing

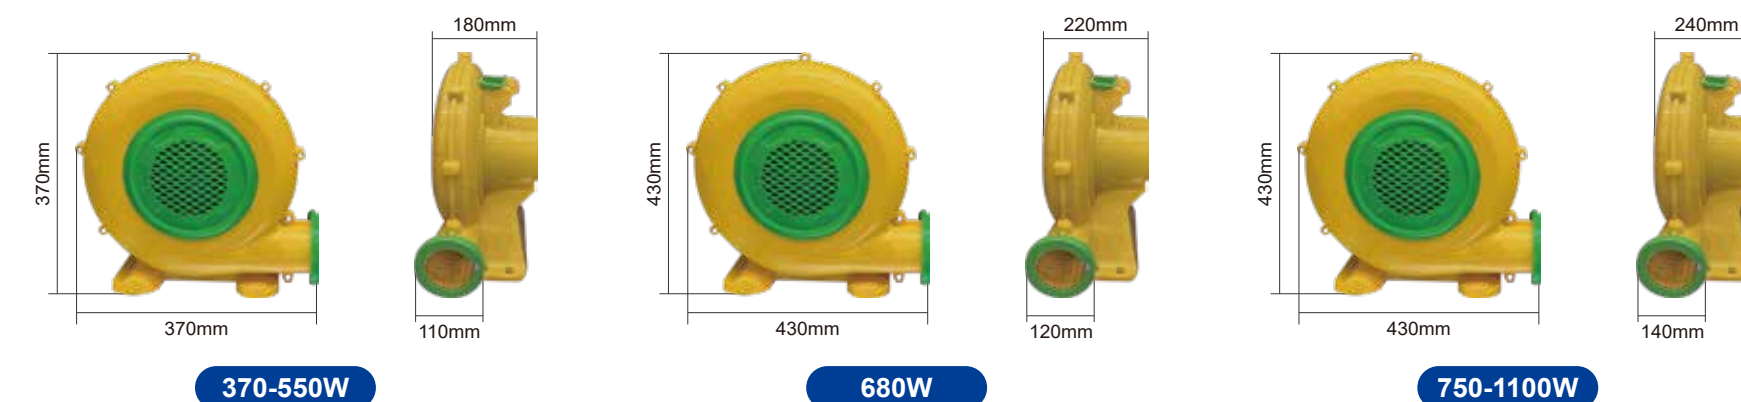

Technical Parameters

Model	Voltage (V)	Frequency (Hz)	Speed (RPM)	Boosting pressure(Pa)	Air flow (m³/h)	Product size (cm)	Caliber (mm)	N.W./G.W. (Kg)	Package size(cm)	line length(cm)
LWA-370-04	220~240	50	2850	1500	760	37×18×37	110	4.1 / 5.1	38×21×38.5	200
LWA-550-04	220~240	50	2850	1800	800	37×18×37	110	4.5 / 5.5	38×21×38.5	200
LWA-680-04	220~240	50	2850	1950	850	43×22×43	120	6 / 7.6	44×23.5×45	200
LWA-750-04	220~240	50	2850	2550	900	43×24×43	140	7 / 8.6	44×25.5×45	200
LWA-950-04	220~240	50	2850	2600	1050	43×24×43	140	7.2 / 8.8	44×25.5×45	200
LWA-1100-04	220~240	50	2850	2650	1200	43×24×43	140	7.5 / 9.1	44×25.5×45	200