

LWAA12038 Series



Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Protected: Impedance protected
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 40PCS/CTN



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA12038UH-13	Ball	115	50/60	0.24/0.21	19/17	2500/2600	95/105	2.70/2.97	6.6/6.6	42/45
LWAA12038UH-14	Ball	115	50/60	0.24/0.21	19/17	2500/2600	95/105	2.70/2.97	6.6/6.6	42/45
LWAA12038UM-15	Ball	115	50/60	0.19/0.17	15/14	2350/2200	90/80	2.55/2.27	5.6/4.0	40/39
LWAA12038UM-16	Ball	115	50/60	0.19/0.17	15/14	2350/2200	90/80	2.55/2.27	5.6/4.0	40/39
LWAA12038UL-17	Ball	115	50/60	0.16/0.15	13/12	2100/2000	78/72	2.21/2.04	3.8/3.0	37/35
LWAA12038UL-18	Ball	115	50/60	0.16/0.15	13/12	2100/2000	78/72	2.21/2.04	3.8/3.0	37/35
LWAA12038UH-19	Sleeve	115	50/60	0.25/0.22	19/17	2450/2550	92/95	2.60/2.70	6.1/5.3	41/43
LWAA12038UH-20	Sleeve	115	50/60	0.25/0.22	19/17	2450/2550	92/95	2.60/2.70	6.1/5.3	41/43
LWAA12038UM-21	Sleeve	115	50/60	0.22/0.20	17/16	2400/2400	90/90	2.55/2.55	6.0/4.6	41/41
LWAA12038UM-22	Sleeve	115	50/60	0.22/0.20	17/16	2400/2400	90/90	2.55/2.55	6.0/4.6	41/41
LWAA12038UL-23	Sleeve	115	50/60	0.17/0.16	13/12	2300/1950	85/70	2.41/1.98	4.7/2.6	40/35
LWAA12038UL-24	Sleeve	115	50/60	0.17/0.16	13/12	2300/1950	85/70	2.41/1.98	4.7/2.6	40/35

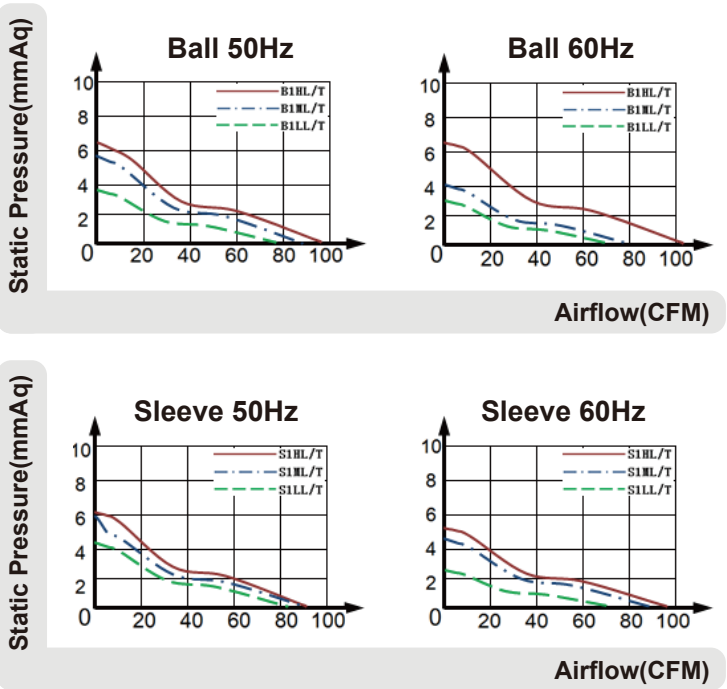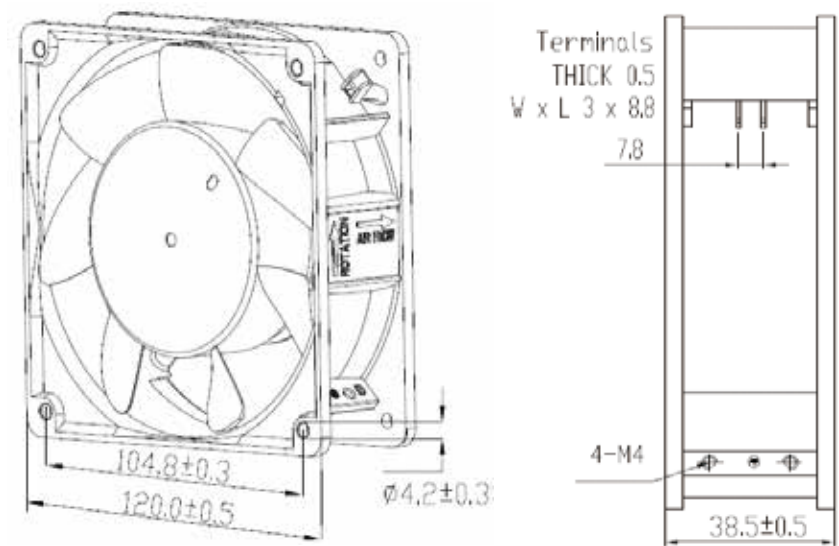

LWAA12038 Series

Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Protected: Impedance protected
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 40PCS/CTN



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA12038SH-15	Ball	220-240	50/60	0.14/0.12	21/18	2550/2700	95/104	2.70/2.95	7.0/6.3	43/46
LWAA12038SH-16	Ball	220-240	50/60	0.13/0.11	21/18	2550/2700	95/104	2.70/2.95	7.0/6.3	43/46
LWAA12038SM-17	Ball	220-240	50/60	0.10/0.09	15/14	2400/2200	90/80	2.55/2.27	6.0/3.5	41/39
LWAA12038SM-18	Ball	220-240	50/60	0.10/0.09	15/14	2400/2200	90/80	2.55/2.27	6.0/3.5	41/39
LWAA12038SL-19	Ball	220-240	50/60	0.09/0.08	13/12	2100/1900	75/70	2.12/1.98	3.6/3.0	37/33
LWAA12038SL-20	Ball	220-240	50/60	0.09/0.08	13/12	2100/1900	75/70	2.12/1.98	3.6/3.0	37/33
LWAA12038SH-21	Sleeve	220-240	50/60	0.13/0.11	19/17	2500/2600	92/97	2.60/2.75	6.6/5.8	42/45
LWAA12038SH-22	Sleeve	220-240	50/60	0.13/0.11	19/17	2500/2600	92/97	2.60/2.75	6.6/5.8	42/45
LWAA12038SM-23	Sleeve	220-240	50/60	0.08/0.07	12/11	2250/1900	82/65	2.32/1.70	4.4/2.6	39/33
LWAA12038SM-24	Sleeve	220-240	50/60	0.08/0.07	12/11	2250/1900	82/65	2.32/1.70	4.4/2.6	39/33
LWAA12038SL-25	Sleeve	220-240	50/60	0.07/0.06	11/10	2050/1750	74/60	2.10/1.84	3.9/2.1	35/30
LWAA12038SL-26	Sleeve	220-240	50/60	0.07/0.06	11/10	2050/1750	74/60	2.10/1.84	3.9/2.1	35/30

