

LWAA17251 Series



Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protected



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA17251UH-13	Ball	115	50/60	0.64/0.53	46/40	2700/3050	180/195	5.10/5.52	13.3/14.4	56/60
LWAA17251UH-14	Ball	115	50/60	0.64/0.53	46/40	2700/3050	180/195	5.10/5.52	13.3/14.4	56/60
LWAA17251UM-15	Ball	115	60	0.40	30	2450	153	4.33	5.3	52
LWAA17251UM-16	Ball	115	60	0.40	30	2450	153	4.33	5.3	52
LWAA17251UL-17	Ball	115	60	0.39	30	2050	126	3.77	3.7	47
LWAA17251UL-18	Ball	115	60	0.39	30	2050	126	3.77	3.7	47
LWAA17251UH-19	Sleeve	115	50/60	0.65/0.57	42/39	2700/2950	175/190	4.96/5.38	12.5/11.0	56/59
LWAA17251UH-20	Sleeve	115	50/60	0.65/0.57	42/39	2700/2950	175/190	4.96/5.38	12.5/11.0	56/59
LWAA17251UM-21	Sleeve	115	60	0.47	36	2500	175	4.96	7.0	53
LWAA17251UM-22	Sleeve	115	60	0.47	36	2500	175	4.96	7.0	53
LWAA17251UL-23	Sleeve	115	60	0.45	35	1900	130	3.68	3.4	45
LWAA17251UL-24	Sleeve	115	60	0.45	35	1900	130	3.68	3.4	45

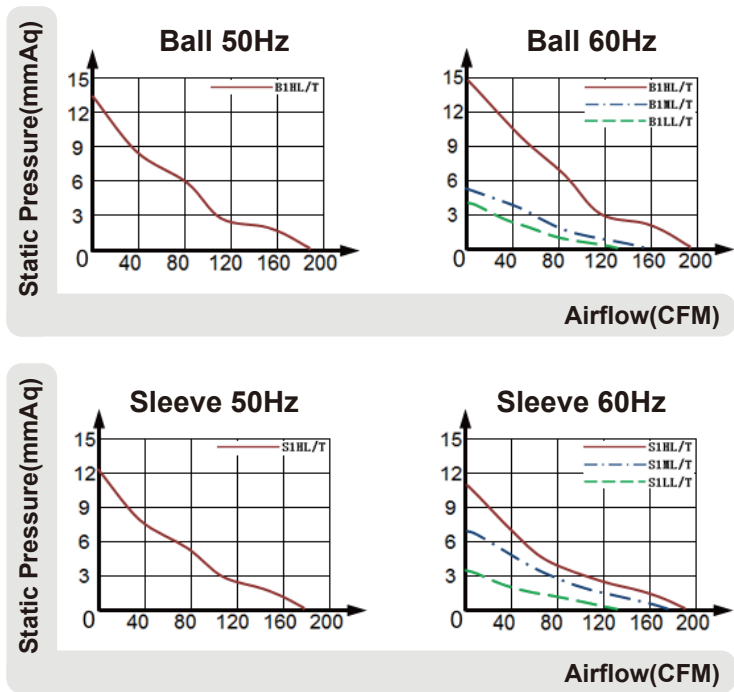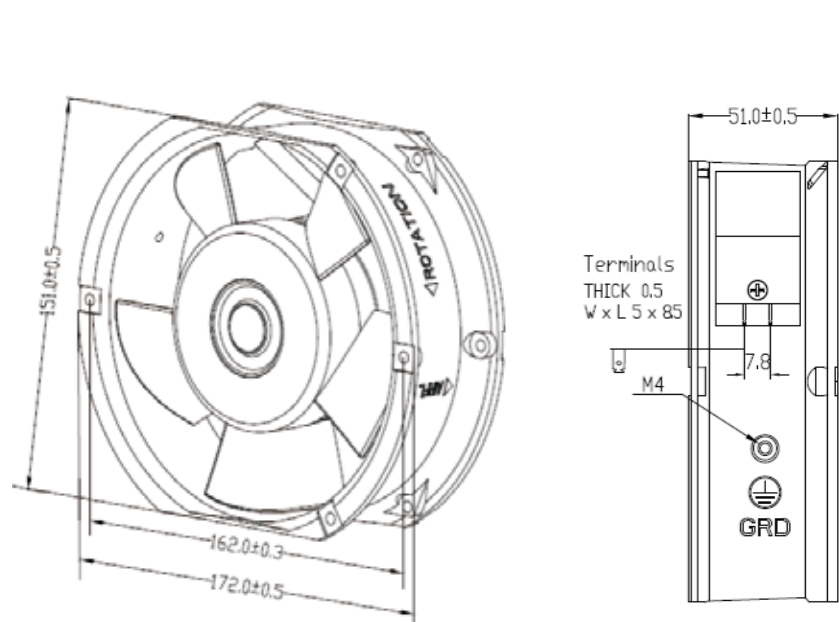

LWAA17251 Series

Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protecte



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA17251SH-13	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	187/200	5.30/5.67	9.5/7.0	57/61
LWAA17251SH-14	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	187/200	5.30/5.67	9.5/7.0	57/61
LWAA17251SM-15	Ball	220-240	50	0.15	22	2450	162	4.60	4.1	53
LWAA17251SM-16	Ball	220-240	50	0.15	22	2450	162	4.60	4.1	53
LWAA17251SL-17	Ball	220-240	50	0.13	19	2150	150	4.25	2.6	49
LWAA17251SL-18	Ball	220-240	50	0.13	19	2150	150	4.25	2.6	49
LWAA17251SH-19	Sleeve	220-240	50/60	0.31/0.27	42/39	2650/2900	183/195	5.19/5.52	9.5/5.2	56/59
LWAA17251SH-20	Sleeve	220-240	50/60	0.31/0.27	42/39	2650/2900	183/195	5.19/5.52	9.5/5.2	56/59
LWAA17251SM-21	Sleeve	220-240	50	0.17	26	2350	155	4.39	3.2	52
LWAA17251SM-22	Sleeve	220-240	50	0.17	26	2350	155	4.39	3.2	52
LWAA17251SL-23	Sleeve	220-240	50	0.15	22	2000	140	3.97	2.0	46
LWAA17251SL-24	Sleeve	220-240	50	0.15	22	2000	140	3.97	2.0	46

