


LWAA-145 Serise





Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP44 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 °C ~ +60 °C |

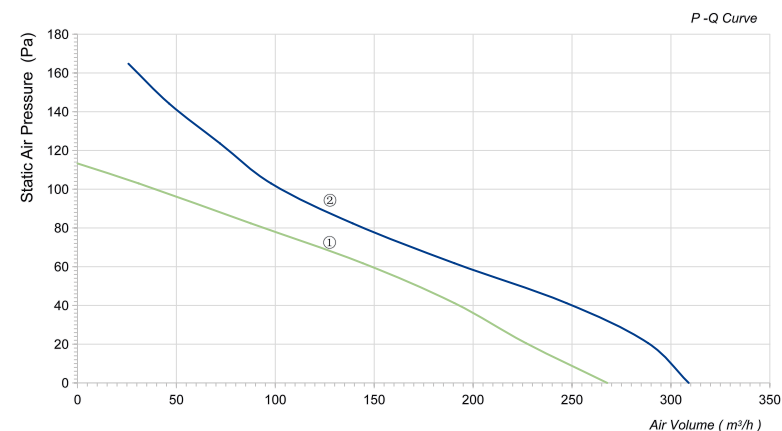


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2D145S-5MNW-01	380/400	50	0.15	50	2800	268	/	46	①
LWAA2D145S-5MNW-02	380/400	60	0.1	35	3200	309	/	49	②

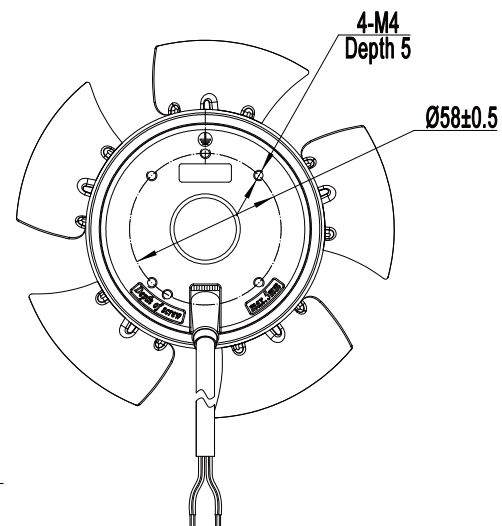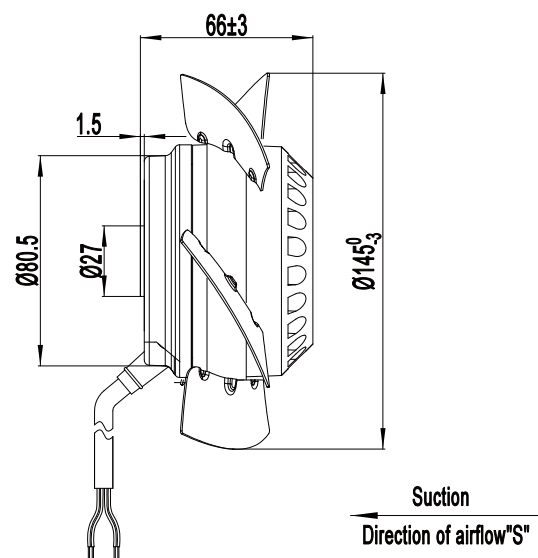

LWAA-165 Serise

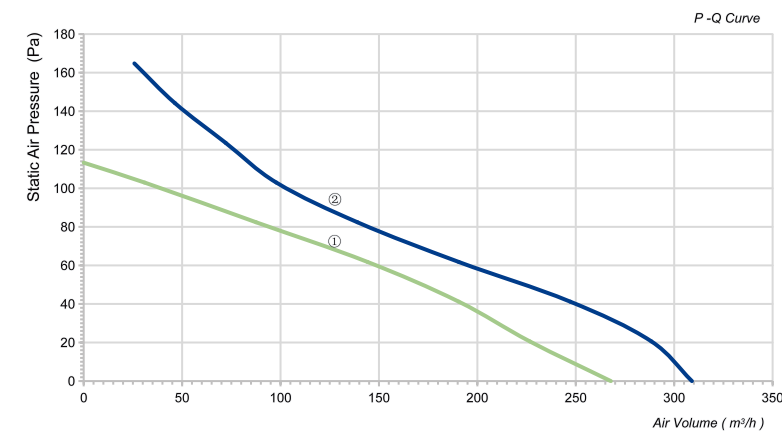

Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP44 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 °C ~ +60 °C |



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2D165S-5MNW-01	380/400	50	0.15	50	2800	278	/	47	①
LWAA2D165S-5MNW-02	380/400	60	0.1	35	3200	330	/	50	②

